

# YOLOv3: Traffic Signs & Lights Detection and Recognition for Autonomous Driving

Rafael Marques<sup>1</sup>, Tiago Ribeiro<sup>1</sup><sup>a</sup>, Gil Lopes<sup>2</sup><sup>b</sup> and A. Fernando Ribeiro<sup>1</sup><sup>c</sup>

<sup>1</sup>*Department of Industrial Electronics, ALGORITMI CENTER, University of Minho, Guimarães, Portugal*

<sup>2</sup>*Department of Communication Sciences and Information Technologies, University of Maia, Maia, Portugal  
{a74420, id9402}@alunos.uminho.pt, alopes@ismai.pt, fernando@dei.uminho.pt*


**Keywords:** Supervised Learning, YOLOV3, Traffic Sign Detection, Autonomous Mobile Robot, Robotics, Simulated Robot, RoboCup.


**Abstract:** Advanced Driver Assistance Systems (ADAS) relates to various in-vehicle systems intended to improve road traffic safety by assisting drivers with improved road awareness, inherent dangers and other drivers nearby. Traffic sign detection and recognition is an integral part of ADAS since these provide information about traffic rules, road conditions, route directions and assistance for safe driving. In addition, traffic sign detection and recognition are essential research topics for safe and efficient driving when considering intelligent transportation systems. An approach to traffic sign/light detection and recognition using YOLOv3 and YOLOv3\_tiny is presented in this paper in two different environments. The first is on a simulated and real autonomous driving robot for RoboCup Portuguese Open Autonomous Driving Competition. The robot must detect both traffic signs and lights in real-time and behave accordingly. The second environment is on public roads. A computer vision system inside the car points to the road, detecting and classifying traffic signs/lights (T S/L) in different weather and lighting conditions. YOLOv3 and YOLOv3\_tiny were tested on both environments with an extensive hyperparameters search. The final result showcases videos of the two algorithms on the two environments.


## 1. INTRODUCTION

With the continuous advances in the automobile industry, automotive vehicles are the leading transportation method in daily life (Fu & Huang, 2010). Consequently, road traffic safety (Swathi & Suresh, 2017) is increasingly becoming a more significant problem around the world. Intelligent Transportation System is an integrated system that uses high-level technology for transportation, service control and vehicle manufacturing. It has the potential to spare time, money, lives, preserve the environment and save resources. It consists of diverse subsystems related to emerging technologies such as smart sensors, mobile data services, geographic information, location technology, and artificial intelligence. Its applications are blind-spot detection, speed limit recognition, emergency brake assistance, traffic sign recognition and lane departure warning

(Yu et al., 2019). Supervised Learning solutions to traffic sign recognition problems are based on datasets and a functional classification algorithm to recognise detected traffic signs and lights and feedback them to smart cars in real-time. One of the solutions that yields the best results are Convolutional Neural Networks (CNNs) (Cao et al., 2019). These neural networks extract features directly from the sensory input image and output the results through the trained classifier based on image features, demonstrating an improved graphical recognition performance. Continuously training the network with input images via forward learning and feedback mechanisms gradually improves the capability to detect and classify the previously trained traffic signs and lights (Rawat & Wang, 2017). This project consists of a real-time object detection algorithm, named YOLOv3 which identifies traffic signs and lights.

<sup>a</sup> <https://orcid.org/0000-0002-5909-0827>

<sup>b</sup> <https://orcid.org/0000-0002-9475-9020>

<sup>c</sup> <https://orcid.org/0000-0002-6438-1223>

## 2. RELATED WORK

A Traffic Sign Recognition software using pre-processing traditional computer vision methods and a simplistic neural network for an autonomous navigation robot is presented in (Moura et al., 2014). This project aimed to participate in the Portuguese RoboCup Open Autonomous Driving Competition . It relied on computer vision software with pictogram extraction for detection and a feed-forward neural network for traffic sign classification. In most signs, 100% precision was obtained in both algorithms. The traffic lights had an accuracy of over 96%, whereas the traffic signs were between 52% and 88.2%. A different approach using end-to-end machine learning solutions for traffic sign recognition systems is presented in (Qian et al., 2016), where CNNs are used without pre-processing. Instead of using a CNN as a feature extractor and a multilayer perceptron (MLP) as a classifier, max-pooling positions (MPPs) is proposed as a practical discriminative feature to predict category labels.

## 3. PROBLEM DEFINITION

The first proposed task is part of the autonomous driving competition held at the RoboCup Portuguese Open (Sociedade Portuguesa de Robótica, 2019). This competition simulates some problems that arise when working on autonomous driving in a controlled and scaled way. It consists of a track with two lanes and two curves set so that the cars can continuously drive around the track. It has vertical traffic signs, traffic lights, two different parking spaces, and traffic cones for temporary lanes and obstacles (Figure 2). For this work, the challenge considered is the "Vertical traffic signs detection challenge".



Figure 2: Environment of the Autonomous Driving Competition from the RoboCup Portuguese Open

The second proposed task is similar to the first one, considering traffic sign and lights detection and recognition and only differs in the environment. It is implemented on a real car driving on public roads. This system must detect a broader range of traffic signs, further away from the car with different weather and light conditions.

## 4. METHODOLOGIES

To test YOLOv3 and YOLOv3\_tiny in both environments (Autonomous Driving Competition and Public Roads) it is essential to parameterise the detection goals. In this chapter, all the information regarding the two environments is described.

In the RoboCup Portuguese Open autonomous driving competition, apart from detecting which sign was identified and its relative location to the robot, another feature implemented is to have the car adjust its actions and movement in real-time according to the traffic signs and lights. The results are shown in simulation and real-world. The autonomous driving competition consists of correctly identifying six traffic lights and twelve traffic signs. In addition, a set of twelve traffic signs were selected to upgrade the variety of signs and demonstrate YOLOv3 capability on more extensive sets of signs. The new signs were selected given their direct interference with the robot's movement, whether to stop, turn in a direction and increase or decrease speed. Figure 3 shows all the traffic signs created where the top twelve are the ones on the competition rulebook, and the bottom twelve are the ones added.

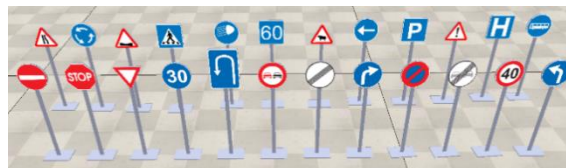


Figure 3: Selected traffic signs for the RoboCup Portuguese Open Autonomous Driving Competition environment.

The traffic lights on the competition are different from public roads since these are not the traditional red, yellow and green lights that inform the user to move or not. These traffic lights provide additional information on different actions the robot must take. They display information forcing the robot to turn left, right or go forward, park, stop or finish the round. Figure 4, on the left, shows how the traffic light is placed on the competition track, and on the right side it shows the six different traffic lights.

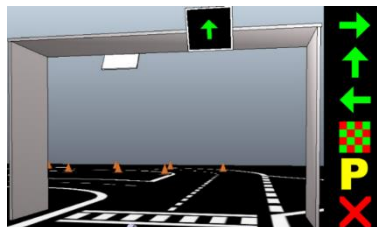


Figure 4: Traffic Lights in the RoboCup Portuguese Open Autonomous Driving Competition Environment.

To compete in the autonomous driving challenge a robotic agent must go through the track and overcome some challenges. The robot agent YOLOv3 was implemented in a car-like four-wheel drive robot with an RGB camera. The input from the camera is used to detect and locate every object on the track, such as traffic signs and lights, traffic cones and parking spots. Figure 5 shows the real and simulated autonomous driving robot.

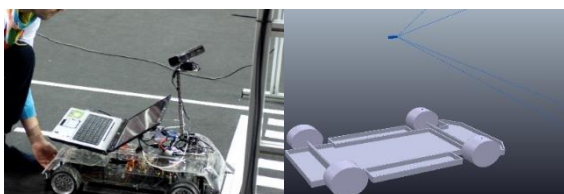


Figure 5: Real-world and simulation autonomous driving robot, with its respective sensors and actuators.

The first objective is the development of a detection and classification algorithm for the real-world competition. To accomplish the objective, three phases were used: Acquisition, training and testing. The same traffic signs and lights are used. The acquisition phase of the first objective has the goal of creating a dataset with images from all the traffic signs and lights in order to train the networks. A smartphone camera was used to record the videos with 1080 resolution and 30 fps. The smartphone was used due to its camera stabilisation and user-friendly interface and because it would emulate the conditions in which the network would be tested. Only one of each six frames is selected to avoid using very similar images. The final video has 9 minutes and 2 seconds and using this script 5949 images were created. Regarding the associated text file to the images, YOLO format is used. For this, most of the labels were deployed using image processing with a Python script developed with the OpenCV library. To process the image the Template Matching function was used. For each traffic sign and light, a template was generated. To improve detection, this template must have a dark background. The background change was performed using the Windows Paint 3D tool where the sign was selected, and the remaining background painted black. The template matching function can be applied to the generated images and the output is an array with the finding locations and corresponding confidences, where only the one with the highest confidence is considered. In Figure 6, an example is presented in which the template used was the Public Transport sign one. The left figure corresponds to all the detections with confidence scores over 40%. The image on the right is the detection with the highest confidence score.



Figure 6: All detections with confidence scores over 40% (Left). Detection with the highest confidence score (Right)

The figure on the right also contains two added points used as corners for the Bounding Box with the corresponding width and height. This data is then used to create the corresponding file where the labels are stored for each detection. However, this method proved to be inefficient in cases where the signs were distant. In this case, all traffic signs and light were manually inserted using Labellmg.

After the acquisition phase, the data is ready to be input to the network for training. For the training phase, two networks were used, YOLOV3 and YOLOV3\_tiny. The networks were chosen due to high fps and accuracy. These were deployed using the Darknet repository, an open-source neural network framework. Darknet provides a config file for the hyperparameters of each YOLO. The main purpose of this objective is to participate in the RoboCup Portuguese Open Autonomous Driving Competition which would be the ultimate test for the developed networks. Unfortunately, due to the COVID-19 pandemic, the competition did not take place. So, the performance was tested on the laboratory track.

## 4.1 Public road

The second objective of this project was to develop a detection and classification algorithm for public road traffic sign and lights. As in previous objectives, a dataset was created with 36 signs and lights. The main goal of the acquisition phase was to obtain several images from all signs and lights in different scenarios. To make the network more robust, it was necessary to have images from different sites, backgrounds, angles, distances, weathers, and lighting. Videos of various trips were recorded from the front passenger seat in the car and on multiple days at different hours. The videos were also recorded during night-time to ensure the network performs correctly all day. The videos were merged and a final video was created, 27 minutes and 53 seconds long, and using the script used in the previous objectives, 8372 images were created. With the final dataset ready, the public road training was performed for YOLOV3 and YOLOV3\_tiny.

## 5. TESTS

For each objective, two networks, YOLOV3 and YOLOV3\_tiny were used. The hyperparameters in each training phase were optimised to obtain the best performance. The YOLO architecture already provides some values. In the following figures, the mAp and loss that outcomes of different hyperparameter configurations are compared and analysed. To ease the comparison between the tested values, a graph is generated for the mAp and another for the loss. The prototypes were implemented on Ubuntu 20.04 operating system on an ASUS Vivobook Pro N580VD with an Intel Core i7 7th Gen 7700HQ CPU and an Nvidia GeForce GTX 1050.

### 5.1 YOLOV3

In this section, the hyperparameters values are tested in the YOLOV3 network and the results are presented. Only the values that provide significant differences in the graphs are presented in Figure 7.

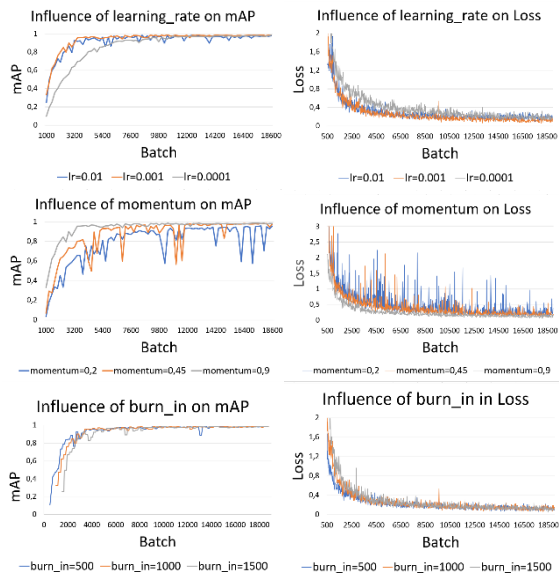


Figure 7: Tests to determine the most optimized values for some hyperparameters for YOLOV3

For some hyperparameters the time the training lasted can influence the choice of the most optimised parameter. In Table 1 these values are presented. The tests were performed in Google Colab Pro using the provided GPUs. The computational power available can fluctuate throughout the tests and this can lead to a slight different training time for two equal trainings. By analysing the graphs, it can be concluded that the most optimised hyperparameters for YOLOV3 are as shown in Table 2.

Table 1 Time the train lasted per parameter

Hyperparameter	Value	Time the training lasted
max_batches	9500	8 hours 47 minutes
	1900	18 hours 6 minutes
	28500	28 hours 19 minutes
burin	500	17 hours 33 minutes
	1000	16 hours 9 minutes
	1500	16 hours 3 minutes
Width x height	320x320	8 hours 56 minutes
	416x416	18 hours 6 minutes
	544x544	28 hours 13 minutes

Table 2 Optimised values for YOLOV3

Hyperparameter	Optimised value
max_batches	19000
learning_rate	0.001
momentum	0.9
burn_in	1000
decay	0.0005
width x heigh	416x416

### 5.2 YOLOV3\_tiny

In this section, the hyperparameters values are tested in the YOLOV3\_tiny network and the results will be presented. Only the values that provide significant differences are presented, in Figure 8. In Table 3, the time each train lasted per parameter is presented. The most optimised hyperparameters for the YOLOV3\_tiny network are as shown in Table 4:

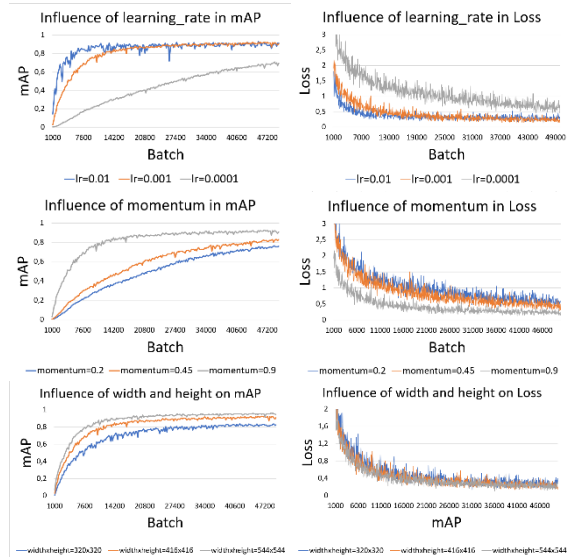


Figure 8: Tests to determine the most optimized values for some hyperparameters for YOLOV3\_tiny.

Table 3 Time the train lasted per parameter

Hyperparameter	Value	Time the train lasted
max_batches	19000	4 hours 24 minutes
	50000	14 hours 7 minutes
	72000	17 hours 51 minutes
burn_in	500	13 hours 33 minutes
	1000	12 hours 27 minutes
	1500	11 hours 22 minutes
widthxheight	320x320	11 hours 42 minutes
	416x416	14 hours 7 minutes
	544x544	20 hours 4 minutes

Table 4 Optimised values for YOLOV3\_tiny

Hyperparameter	Optimised value
max_batches	50000
learning_rate	0.001
momentum	0.9
burn_in	1000
decay	0.0005
width x height	544x544

### 5.3 Conclusion

By interpreting the results obtained in sections 5.1 and 5.2, the optimised values for the hyperparameters for YOLOV3 network are the similar to the ones provided in the paper. For YOLOV3\_tiny network, the only changed hyperparameter is the image size (width and height). By increasing the number of pixels per sign, it allows the network to have more features to process, thus increasing accuracy.

## 6. RESULTS

After defining the most optimised hyperparameters, the final neural networks were trained. In this section the two networks developed for both objectives are compared to determine the best for each scenario.

### 6.1 Final networks

The networks were trained using the optimal hyperparameters. Figure 9 shows the results of the RoboCup Portuguese Open Autonomous Driving Competition using the YOLOV3 network, whereas Figure 10 shows the results for YOLOV3\_tiny network. Figure 11 shows the results of the Public Road using the YOLOV3 network, whereas Figure 12 shows the results using the YOLOV3\_tiny network.

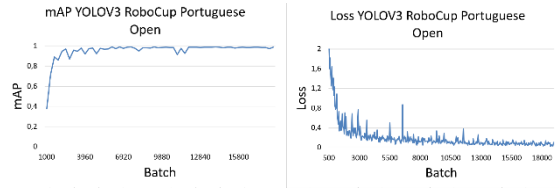


Figure 9: RoboCup Portuguese Open Autonomous Driving Competition (YOLOV3). Best mAP: 99.08%.

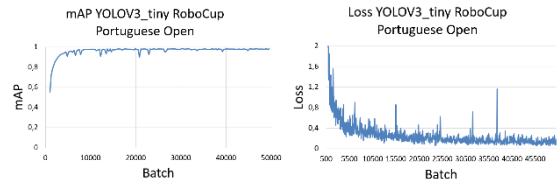


Figure 10: RoboCup Portuguese Open Autonomous Driving Competition (YOLOV3\_tiny). Best mAP: 98.47%.

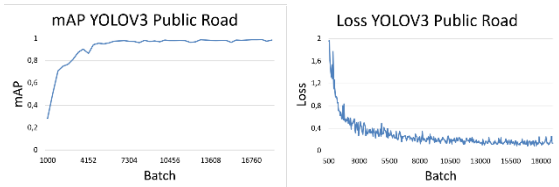


Figure 11: Public Road (YOLOV3). Best mAP: 98.914%.

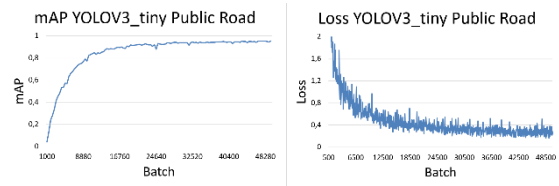


Figure 12: Public Road (YOLOV3\_tiny). Best mAP: 95.584%.

### 6.2 Network comparison

In this section, the outcome of the videos in the Appendix is discussed to thoroughly understand the differences between the networks. In the RoboCup Portuguese Open Autonomous Driving Competition, to test the networks for the simulation two tests are deployed. On the first test, the signs are placed in line to validate the correct classification and detection. The lowest confidence for which signals were detected was 80%. Comparing the two videos in Appendix A) it is possible to verify that the computational power required for the YOLOV3 network is superior to what the computer offers. This means that only a fraction of the frames is processed. Regarding classification, the fraction of processed frames shows that the signs are all classified and detected with confidence over 95%. On the left side of Figure 13, an example of this high confidence in detection is demonstrated. On the other hand, the YOLOV3 tiny network manages to process the

frames in such a way that the robot is constantly identifying and classifying the signs. Compared to the other network YOLOV3\_tiny does not have such high detection confidence or stable Bounding Boxes but its ability to process frames overcomes such limitations. On the right side of Figure 13, this detection is presented.

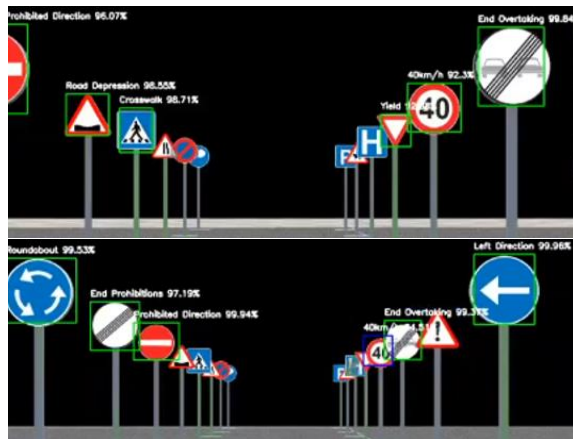


Figure 13: Frame with high confidence detection from YOLOV3 (top) and YOLOV3\_tiny (bottom) networks.

For the second test, the signs were placed so the robot can detect these sequentially while performing the respective movements. The robot reacted to the signs when confidence was over 98%. Comparing the two videos in Appendix A) from the second test, the differences are like the previous test. The output for the YOLOV3 network cannot process all the frames so that the robot reacts to the traffic signs promptly to perform the corresponding movements. This lack of performance implied that the car only reacted to the Left Obligation sign when it was already very close to it. Regarding classification, the network can correctly classify with confidence above 99% the signs obtained. The moment the robot reacted to the Turn Left Ahead sign is presented in Figure 14. In this test, the YOLOV3\_tiny network enabled the robot to go all the way until it stopped at the STOP sign, displayed in Figure 15. Along the way, it was able to correctly identify and react to all the signs.

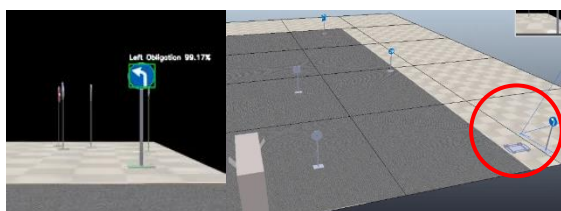


Figure 14: The robot reacting to Turn Left sign (YOLOV3).

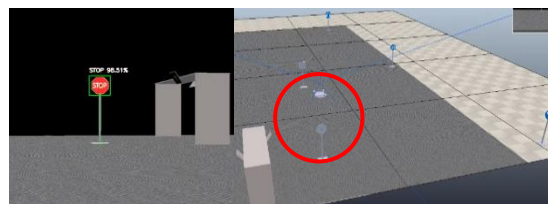


Figure 15: Frame where the Stop sign was detected (YOLOV3\_tiny)

To test on RoboCup Portuguese Open Autonomous Driving Competition real-world environment, two videos were recorded. These demonstrate the robot driving along the track and observing the signs/lights randomly placed. The difference between the two is that the first video was recorded with high stability and the second on the robot prototype trying to complete the track as quickly as possible. In Appendix B) these videos are presented for each of the networks. The signs are only detected when confidence is over 80%. The YOLOV3 network managed to process an average of 2 fps while the YOLOV3\_tiny 17 fps. If applied in real-time, the YOLOV3 network would have problems reacting to signs in a timely manner whereas the YOLOV3\_tiny would do so with a greater margin. Since YOLOV3 could only process on a slow frame rate, so the video showcases a post processing outcome of the algorithm. By comparing both videos it is possible to verify the correct functioning of both networks. The result from both networks is very similar and for YOLOV3 the detection percentages are slightly higher, as can be seen in Figure 16.



Figure 16: Detection from the YOLOV3 (left) and YOLOV3\_tiny (right)

Regarding the detection distance, the results are higher on the YOLOV3, detecting at 4 meters, half the length of the track. Bounding Boxes have superior accuracy and are more stable on the YOLOV3 network. The comparison between the Bounding Boxes is shown in Figure 17.



Figure 17: Bounding Boxes from the YOLOV3 (top) and YOLOV3\_tiny (bottom)

In the videos with less stability, both networks can detect the signs on the track, with YOLOV3 having slight better precision and stability. The performances are demonstrated in Figure 18.

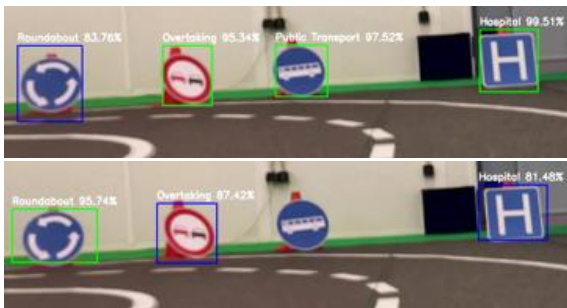


Figure 18: Detection with less stability from the YOLOV3 (top) and YOLOV3\_tiny (bottom)

The Public Road is the more complex objective. The competition is more constrained and does not have so many background variations that can lead to difficulties in detection and classification. To test the two networks, various videos were recorded showing traffic signs and lights, and the algorithm output in Appendix C). These videos were recorded in different cities in northern Portugal. Different characteristics, such as, luminosity, weather conditions, time of day and luminosity incidence are shown in the videos. In the videos, the signs are detected when confidence is over 80%. In the first moments of the video, the frames have conditions that can be considered ideal as it is sunny and the road has good lighting. In Figure 19, multiple signs appear at different distances and the differences between the networks are quite visible. While the YOLOV3 network can detect all the signals presented with stable Bounding Boxes, the YOLOV3\_tiny network can only detect about half of the signals and the Bounding Boxes fluctuate a lot in position and some signs are cut.



Figure 19: Detection with ideal conditions from the YOLOV3 (top) and YOLOV3\_tiny (bottom)

In Figure 20 a different scenario is shown, where it is raining, and the frame is blurrier. The YOLOV3 network can correctly classify every Traffic Sign with confidence over 95%. The YOLOV3\_tiny does not achieve the same results. It can only detect the Roundabout sign with 93.56%.



Figure 20: Detection with rain from the YOLOV3 (top) and YOLOV3\_tiny (bottom)

In ideal conditions, the frame presented in Figure 21 presents the detection of three traffic signs, provided that the Prohibited Direction Sign is not facing the camera. Both networks correctly classify the two signs but the YOLOV3 one has significantly higher confidence. The Bounding Boxes are less precise in the tiny version. With rain, the detection of traffic lights is tested. In Figure 22 the comparison of the two networks is shown. The YOLOV3 correctly identifies the traffic light and the colour from the two top lights but incorrectly merges two lights into one at the bottom. The tiny version only detects one traffic sign at the top of the frame and also incorrectly merges two lights into one at the bottom. In this version, the colour on the top light is correctly detected.

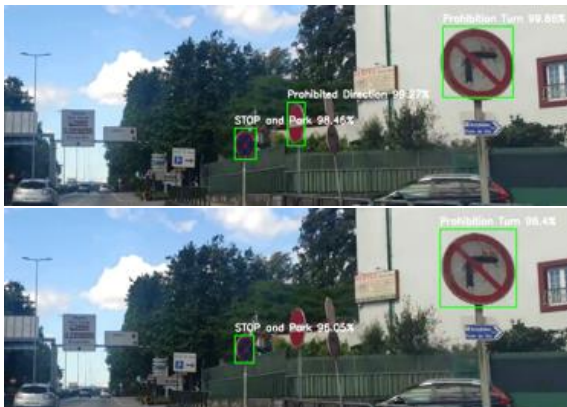


Figure 21: Detection of a sign not facing the camera from the YOLOV3 (top) and YOLOV3\_tiny (bottom)

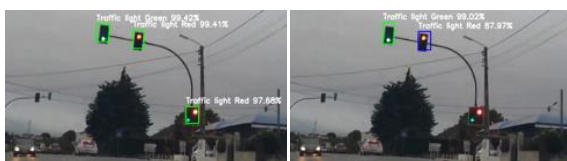


Figure 22: Traffic Light detection from the YOLOV3 (left) and YOLOV3\_tiny (right)

## 7. CONCLUSIONS

Regarding the first objective, the most suitable network is YOLOV3\_tiny since, throughout the two tests, it demonstrated that the traffic sign and lights were correctly detected and classified. The processing time of the YOLOV3 network meant that the robot could not react on time to traffic signals, which in a competition is a fatal error. In real-world competition, the same problem regarding processing time was encountered. In this competition, robots use small devices to perform all computer processing and therefore the most suitable network is YOLOV3\_tiny since the computational power is limited. The accuracy of the YOLOV3 network is superior but this does not overcome the processing time problem. For the second objective, the high accuracy of the YOLOV3 network proves this network as the preferable option. Despite the problem of processing time associated with this network, cars that contain Traffic Sign Detection software have a higher computational power which allows a lower processing time and leads to a better accuracy in the detection and classification. The tiny version does not have an accuracy that allows the car to trust the signs it classifies.

## ACKNOWLEDGMENTS

This work has been supported by FCT—Fundação para a Ciência e Tecnologia within the R&D Units Project Scope: UIDB/00319/2020. In addition, this work has also been funded through a doctoral scholarship from the Portuguese Foundation for Science and Technology (Fundação para a Ciência e a Tecnologia) [grant number SFRH/BD/06944/2020], with funds from the Portuguese Ministry of Science, Technology and Higher Education and the European Social Fund through the Programa Operacional do Capital Humano (POCH).

## REFERENCES

- Fu, M. Y., & Huang, Y. S. (2010). A survey of traffic sign recognition. 2010 International Conference on Wavelet Analysis and Pattern Recognition. Published. <https://doi.org/10.1109/icwapr.2010.5576425>
- Swathi, M., & Suresh, K. V. (2017). Automatic traffic sign detection and recognition: A review. 2017 International Conference on Algorithms, Methodology, Models and Applications in Emerging Technologies (ICAMMAET). Published. <https://doi.org/10.1109/icammaet.2017.8186650>
- Yu, J., Liu, H., & Zhang, H. (2019). Research on Detection and Recognition Algorithm of Road Traffic Signs. 2019 Chinese Control And Decision Conference (CCDC). Published. <https://doi.org/10.1109/ccdc.2019.8833426>
- Cao, J., Song, C., Peng, S., Xiao, F., & Song, S. (2019). Improved Traffic Sign Detection and Recognition Algorithm for Intelligent Vehicles. *Sensors*, 19(18), 4021. <https://doi.org/10.3390/s19184021>
- Rawat, W., & Wang, Z. (2017). Deep Convolutional Neural Networks for Image Classification: A Comprehensive Review. *Neural Computation*, 29(9), 2352–2449. [https://doi.org/10.1162/neco\\_a\\_00990](https://doi.org/10.1162/neco_a_00990)
- Moura, T., Valente, A., Sousa, A., & Filipe, V. (2014). Traffic Sign Recognition for Autonomous Driving Robot. 2014 IEEE International Conference on Autonomous Robot Systems and Competitions (ICARSC). Published. <https://doi.org/10.1109/icarsc.2014.6849803>
- Qian, R., Yue, Y., Coenen, F., & Zhang, B. (2016). Traffic sign recognition with convolutional neural network based on max pooling positions. 2016 12th International Conference on Natural Computation, Fuzzy Systems and Knowledge Discovery (ICNC-FSKD). Published. <https://doi.org/10.1109/fskd.2016.7603237>
- Sociedade Portuguesa de Robótica, “Robótica 2019 - Rules for Autonomous Driving.”

## APPENDIX

- A) RoboCup Portuguese Open Autonomous Driving Competition in simulation: <https://youtu.be/oaBd6Ub-o7E>
- B) RoboCup Portuguese Open Autonomous Driving Competition real-world: <https://youtu.be/T2USKNakM9w>
- C) Public road: <https://youtu.be/zzIkw8suny4>