

3D printed functional cookies fortified with *Arthrospira platensis*: Evaluation of its antioxidant potential and physical-chemical characterization

Marta V. Vieira^a, Sara M. Oliveira^a, Isabel R. Amado^a, Luiz H. Fasolin^{b,c}, Antonio A. Vicente^b, Lorenzo M. Pastrana^a, Pablo Fuciños^{a,*}

^a International Iberian Nanotechnology Laboratory, Department of Life Sciences, Av. Mestre José Veiga s/n, 4715-330, Braga, Portugal

^b CEB – Centre of Biological Engineering, Universidade do Minho. Campus de Gualtar, 4710-057, Braga, Portugal

^c Department of Food Engineering, School of Food Engineering, University of Campinas, UNICAMP, 13083-862, Campinas, SP, Brazil

ARTICLE INFO

Keywords:

Arthrospira platensis
Encapsulation
Food-ink
Functional food
3D printing

ABSTRACT

In the last few decades, consumers' growing attention to the close relationship between health and nutrition is emerging as a new trend, mostly regarding the incorporation of natural ingredients into food. Among those ingredients, microalgae are considered as innovative and promising compounds, rich in valuable nutrients and bioactive molecules. In the present work, 3D printed cookies were fortified with the microalga *Arthrospira platensis* aiming at developing a new functional food with antioxidant properties. *A. platensis* antioxidants were recovered using ultrasound-assisted extraction in hydroalcoholic solutions. Ethanol/water and biomass/solvent ratios were optimised through a Design of Experiments (DOE) approach, using the antioxidant activity (ORAC and ABTS) and total phenolic content (TPC) as response variables. The highest ORAC, ABTS and TPC values were observed in the extract obtained with 0% ethanol and 2.0% biomass; thus, this extract was chosen to be incorporated into a printable cookie dough. Three different incorporation approaches were followed: (1) dried biomass, (2) freeze-dried antioxidant extract and (3) antioxidant extract encapsulated into alginate microbeads to enhance the stability to heat, light, and oxygen during baking and further storage. All dough formulations presented shape fidelity with the 3D model. The cookies had a_w values low enough to be microbiologically stable, and the texture remained constant after 30 days of storage. Moreover, the extract encapsulation promoted an improvement in the ORAC value and colour stability when compared to all other formulations, revealing the potential of *A. platensis* for the development of a functional 3D food-ink.

1. Introduction

Many nutrition concepts have changed during the past few decades, and the food industry has made a significant effort to follow them and adapt their products to these changes. Traditionally, the primary role of diet was to provide enough nutrients to meet metabolic requirements while giving consumers a feeling of satisfaction and well-being. Nowadays, however, it is established that beyond meeting nutritional needs, the diet may modulate various bodily functions and may play detrimental or beneficial roles in some diseases (Bigliardi & Galati, 2013; Roberfroid, 2000). In this regard, it is possible to observe an increasing consumer's health consciousness and demand for healthy foods - facts that are stimulating innovation and new product development in the food industry. This trend is also responsible for an ever-increasing worldwide interest in functional food, which also can be explained by

the increasing cost of the health care and the steady boost of life expectancy (Betoret, Betoret, Vidal, & Fito, 2011; Lopez-Rubio, Gavara, & Lagaron, 2006; Plaza, Herrero, Cifuentes, & Ibáñez, 2009; Sun, Zhou, Yan, Huang, & Lin-ya, 2018).

Functional food is a natural or processed food that contains known biologically-active compounds which, when in defined quantitative and qualitative amounts, provide a clinically proven and documented health benefit; and, hence, a useful tool for the prevention, management and treatment of diseases. There is a wide range of compounds that have already been incorporated into functional foods, with particular attention being given to ingredients from natural resources (Day, Seymour, Pitts, Konczak, & Lundin, 2009; Herrero, Martín-Álvarez, Senoráns, Cifuentes, & Ibáñez, 2005).

Microalgae can be considered an innovative and promising food ingredient, rich in nutrients such as high-value proteins, long-chain

* Corresponding author.

E-mail address: pablo.fucinos@inl.int (P. Fuciños).

<https://doi.org/10.1016/j.foodhyd.2020.105893>

Received 30 September 2019; Received in revised form 24 March 2020; Accepted 26 March 2020

Available online 31 March 2020

0268-005X/© 2020 Elsevier Ltd. All rights reserved.

polyunsaturated fatty acids, carotenoids, vitamins, minerals, and phenolic compounds, as well as other bioactive molecules (Gouveia, Marques, Sousa, Moura, & Bandarra, 2010). Among them, *Arthrospira platensis* is one of the main species exploited by the food and nutrition industries, being traditionally used as food by different cultures. This microorganism is a blue-green filamentous prokaryotic cyanobacterium well known for its unique composition, comprising not only up to 70% of protein containing all the essential amino acids, but also polysaccharides, vitamin B₁₂, C, E, and γ -linolenic acid (GLA). Furthermore, it is a source of potent antioxidants, such as carotenoids, polyphenols and phycobiliproteins -a group of photosynthetic pigments majority represented by C-phycoyanin, which are related to numerous reported pharmacological properties; including anticancer, antidiabetes, hepatoprotective and anti-inflammatory (Czerwonka et al., 2018; Da Silva, Fernandes, Barros, Fernandes, & José, 2019; Hu, Fan, Qi, & Zhang, 2019; Plaza, Herrero, Cifuentes, & Ibáñez, 2009; Soni, Sudhakar, & Rana, 2017).

The incorporation of microalgae biomass into traditional foods (e.g. breakfast cereals, bread, pasta, cookies, gelled desserts, and beverages), which are primarily consumed on a daily basis, has been researched and several products have already been launched in the market (Gouveia et al., 2010; Lafarga, 2019). In particular, cookies are considered a convenient dense snack food, offering a valuable supplementation vehicle for nutritional improvement as they are widely accepted and consumed by all age groups. There is a trend for research and innovation in this market segment, which promotes the inclusion of healthy ingredients into cookies, such as antioxidants, vitamins, minerals, proteins and fibers (Batista et al., 2017; Nogueira & Steel, 2018; Saponjac et al., 2016).

Besides the change in consumer's attitudes towards a healthier diet, it is noteworthy that food ingredients and their nutritional needs vary among individuals, especially children, elderly and athletes (Tan, Toh, Wong, & Li, 2018). This context motivates a growing market for personalized healthy nutrition, which aims to tailor food and diets specifically based on an individual's health condition. In light of this, three dimensional (3D) food printing has gained increasing attention for its distinctive potential to create complex geometric structures, enabling mass customisation while having economic and environmental benefits. The main advantage of this emerging technology is being able to personalize food by tailoring nutrition in a novel multi-flavoured, coloured and textured structure, allowing the incorporation of a broad range of ingredients (Dankar, Haddarah, Omar, Sepulcre, & Pujolà, 2018; Liu et al., 2018a; Pérez, Nykvist, Brøgger, Larsena, & Falkeborg, 2019; Sun et al., 2018).

Considering the above mentioned, this study aimed at developing 3D printed functional cookies fortified with antioxidants extracted from *A. platensis*, to create a new functional food based on an innovative 3D food-ink. Due to the inherent instability of C-phycoyanin, carotenoids and other antioxidant compounds present in this microalga, the encapsulation of its extract in alginate microbeads was proposed as a way of improving the cookies stability to heat, light, and oxygen during the baking and further storage. Parameters such as colour, texture, water activity and antioxidant potential were investigated and compared with the freeze-dried extract and whole biomass incorporation into the cookie dough.

2. Materials and methods

2.1. Materials

Arthrospira platensis biomass was obtained commercially in a specialized store (Braga, Portugal). Potassium phosphate dibasic and potassium di-hydrogen phosphate were purchased from Fisher Bio-reagents (Pittsburgh, USA) and AppliChem (Darmstadt, Germany), respectively. All other reagents were purchased from Sigma-Aldrich (St. Louis, MO, USA). All solvents and reagents used were of analytical

grade.

2.2. Optimization of *A. platensis* antioxidants extraction

A. platensis antioxidants were recovered using ultrasound-assisted extraction in hydroalcoholic solutions. The influence of the ethanol/water and biomass/solvent ratios were assessed through a Design of Experiments (DoE) approach, using the antioxidant activity (ORAC and ABTS) and total phenolic content (TPC) as response variables. The lower and upper limits for the independent variables were based on previously reported conditions for extracting antioxidants from *Arthrospira* spp. (El-Baz, El-Senousy, El-Sayed, & Kamel, 2013; Oh, Ahn, Do, & Lee, 2011; Silva et al., 2017; Syarina, Karthivashan, Abas, Arulselvan, & Fakurazi, 2015). Table 1 shows the coded variables and their real values for *A. platensis* antioxidant extraction. The obtained extracts were analysed as described in Section 2.3. The extract with higher antioxidant activity was freeze-dried for further encapsulation and incorporation into the cookie doughs.

2.3. Antioxidant activity and total phenolic content

The Oxygen Radical Absorbance Capacity (ORAC) of the extracts was performed in 96-well microplates, based on the method proposed by Ou, Hampsch-Woodill, and Prior (2001) and further modified by Dávalos, Gómez-Cordovés, and Bartolomé (2004). In brief, 20 μ L of different concentrations of the extracts were added to 120 μ L of a 116.67 nmol. L⁻¹ fluorescein solution prepared in 75 mmol.L⁻¹ phosphate buffer at pH 7.4. The mixture was incubated for 15 min at 37 °C and, subsequently, 60 μ L of 40 mmol.L⁻¹ 2,2'-azobis(2-methylpropionamide)-dihydrochloride (AAPH) were rapidly added using the automatic reagent injector of the plate reader (Biotek Synergy H1). A blank (Fluorescein + AAPH) prepared with 20 μ L of phosphate buffer instead of the extracts was also analysed, and Trolox was used as standard. Fluorescence was recorded every 5 min after AAPH addition (excitation wavelength 485 nm, emission wavelength 520 nm) for 120 min. Results were calculated based on the differences in areas under the fluorescein decay curve between the blank and the samples and were expressed as μ mol.L⁻¹ of Trolox equivalents/g sample.

The spectrophotometric analysis of ABTS radical scavenging activity was conducted according to the method of Re et al. (1999). Firstly, an ABTS solution was prepared by mixing 7 mmol.L⁻¹ ABTS (2,2'-azino-bis(3-ethylbenzothiazoline-6-sulphonic acid) diammonium salt with 2.45 mmol.L⁻¹ potassium persulfate, allowing this mixture to stand at room temperature for 12–16 h in the dark. Subsequently, the ABTS solution was diluted with Milli-Q water to obtain an absorbance of 0.70 ± 0.02 at 734 nm. In a 96-well microplate, 10 μ L of the sample was added with 200 μ L of the ABTS solution, and after 6 min of reaction, the absorbance was measured at 734 nm. The scavenging capacity percentages (% RadScav) were calculated using Eq. (1). Results were expressed as Trolox Equivalent Antioxidant Capacity (TEAC) in mmol.L⁻¹ of Trolox per g of *A. platensis* biomass (mmol.L⁻¹ TEAC/g).

$$\% \text{ RadScav} = 1 - (\text{Abs}_{\text{blank}} - \text{Abs}_{\text{sample}} / \text{Abs}_{\text{Trolox}}) * 100 \quad (1)$$

Where Abs_s, Abs_b and Abs_c are the absorbance of the sample, blank and

Table 1

Full Factorial 2^k Design of Experiments for *A. platensis* antioxidants extraction, with two factors and two central points. Real values in parentheses.

Run	X ₁ (Ethanol/Total solvent ratio)	X ₂ (Microalgae mass/Volume of solvent)
1	1 (100%)	1 (12%)
2	1 (100%)	-1 (2%)
3	-1 (0%)	1 (12%)
4	-1 (0%)	-1 (2%)
5	0 (50%)	0 (7%)
6	0 (50%)	0 (7%)

negative control, respectively.

The total phenolic content (TPC) of the extracts was determined according to the method of Singleton, Orthofer, and Lamuela-Raventós (1999), using the Folin-Ciocalteu reagent (FCR) and gallic acid as a standard. Initially, 0.5 mL of sample was mixed with 0.1 mL of Folin-Ciocalteu reagent and vigorously stirred. After 5 min, 0.5 mL of a 7.0% sodium carbonate solution was added to alkalize the medium, and the mixture was allowed to react for 1 h at room temperature. The absorbance was measured spectrophotometrically at a wavelength of 760 nm, and the results were expressed as mg of gallic acid equivalent (GAE) per g of *A. platensis* biomass (mg GAE/g).

2.4. Preparation of the cookie dough

Control cookies were prepared according to the formulation reported by Kim et al. (2019), using wheat flour, butter, powdered sugar, milk and xanthan gum. *A. platensis* incorporation was done by replacing an equivalent amount of wheat flour following three different approaches: (1) direct addition of 2.0% whole *A. platensis* dried biomass, (2) incorporation of the freeze-dried antioxidant extract obtained from the same amount of biomass and (3) incorporation of an equivalent amount of antioxidant extract encapsulated into alginate microbeads. The dough formulations are presented in Table 2.

2.4.1. *A. platensis* extract encapsulation

Freeze-dried *A. platensis* extract was encapsulated within alginate microbeads through vibrational extrusion technique using the Büchi Encapsulator B-395 Pro® (Büchi Labortechnik AG, Flawil, Switzerland). Briefly, a 2.0% (w/v) sodium alginate aqueous solution was prepared, and the freeze-dried extract (8% w/v) was added under stirring. The parameters selected were chosen based on the manufacturer's recommended conditions for air-flow configurations: inner nozzle size of 150 µm and outer nozzle of 600 µm, frequency 2000 Hz, electrode 1200 V, amplitude 2, airflow 0.8 mbar and flow rate of 1.5 mL/min.

The beads formed were collected into a 0.1 mol.L⁻¹ calcium chloride solution and stirred at 500 rpm. After all the alginate solution was dispensed, the beads were left at a lower agitation rate (200 rpm) for 2 h to complete the hardening process. The resulting *A. platensis*-calcium alginate microbeads were retrieved by filtration using a 100-µm strainer and rinsed with distilled water. Before weighting for cookie dough incorporation, the water excess was removed off the microbeads with filter paper.

2.5. Dough characterization

2.5.1. Rheological analyses

Oscillatory dynamic measurements and creep-recovery tests were carried out in an HR-1 rheometer (TA Instruments, USA) equipped with a stainless steel parallel plate geometry (40 mm diameter, 1000 µm gap) within the linear viscoelasticity domain, in duplicate. The samples were

Table 2

Cookies dough formulations fortified with different *A. platensis* forms.

Ingredients	Control (g/100 g)	Biomass (g/100 g)	Free Extract (g/100 g)	Encapsulated Extract (g/100 g)
Wheat flour	40	38	39.2	30
Butter	25	25	25	25
Powdered sugar	22	22	22	22
Milk	13	13	13	13
Xanthan gum	0.5	0.5	0.5	0.5
<i>A. platensis</i>	0	2	0.8 ^a	10 ^b

^a Amount of freeze-dried extract present in 2.0% of *A. platensis* biomass.

^b Incorporation of 10% of *A. platensis* alginate microbeads with an amount of extract equal to the free extract formulation.

handled gently to avoid structural damage, and they were allowed to rest for 3 min before analysis. Temperature-sweep profiles were performed in the range of 25 °C–150 °C at 5 °C/min and 1 Hz. Complex modulus (G^*) and $\tan \delta$ were evaluated.

Creep-recovery assays were carried out at 25 °C by applying constant stress (55 Pa) for 360 s on the dough and allowing strain recovery for 600 s after load removal. The strain was obtained as a function of time, and the data were represented by creep compliance: $J(t)$ (Pa⁻¹) = γ/σ , where γ and σ are the strain and constant shear stress during the creep test, respectively. The creep compliance data of the dough samples were fitted with Burger's model for creep and recovery stages (Eqs. (2) and (3), respectively).

$$J(t)_c = J_0 + J_m \left(1 - \exp\left(\frac{-t}{\lambda}\right) \right) + \frac{t}{\eta_0} \quad (2)$$

$$J(t)_r = J_{max} - J_0 - J_m \left(1 - \exp\left(\frac{-t}{\lambda}\right) \right) \quad (3)$$

where J_0 (Pa⁻¹), J_m (Pa⁻¹), and J_{max} (Pa⁻¹) represent the instantaneous, viscoelastic, and maximum creep compliance values, respectively; t (s) and λ (s) are the phase and average retardation time, respectively; and η_0 is the viscosity coefficient (Pa.s). The relative elastic portion (%) was determined by the ratio between the equilibrium compliance and the maximum compliance.

2.5.2. Texture measurement

The dough firmness was assessed by a uniaxial compression assay in a Texture Analyser TA-HD plus Stable MicroSystem (Godalming, Surrey, UK). Cylindrical dough samples (12 mm diameter, 10 mm height) were compressed at a speed of 1 mm/s, with trigger force of 5 g up to 90% strain level. Results were expressed by the peak force in the force-time graph (N.s). Measurements were repeated five times for each formulation.

2.6. 3D printing and post-processing

The cookies were produced using a 3D food printer (Focus, Byflow, Netherlands) equipped with a paste printing head and a 1.6 mm aperture nozzle. A cylinder shape (27.6 mm diameter and 6.72 mm height) was sliced (Slic3r software) to micro-extrude 6 layers, each one with 1.12 mm thickness, through a nozzle moving at a speed of 10 mm s⁻¹. During printing, flow rate and Z-offset were adjusted to obtain the adequate dough weight and shape (diameter and thickness) according to the 3D model. Each formulation was printed at least in triplicate.

The printed cookies were baked at 150 °C for 25 min. Then, depending on the type of experiment, the cookies were analysed in triplicate (using three cookies) or in quintuplicate (using five cookies). Measurements of height and diameter were performed in three replicates, before and after post-processing, aiming to evaluate shape fidelity. This parameter was based on the differences between the cookies theoretical and measured dimensions, as described in Eq. (4). The effect of baking on the cookie's shape was determined as the percentual variation of the dimensions before and after baking (Eq. (5)).

$$\text{Shape fidelity (\%)} = \frac{(\text{Measured dimension} * 100)}{\text{Theoretical dimension}} \quad (4)$$

$$\text{Variation (\%)} = \frac{[(\text{Baked cookie dimension} - \text{Raw cookie dimension}) * 100]}{\text{Raw cookie dimension}} \quad (5)$$

2.7. Cookies physical-chemical characterization

All cookies were analysed in terms of colour variation, water activity, texture and antioxidant potential, 24 h after baking and after 30 days of storage at room temperature, protected from light.

2.7.1. Colour analysis

The colour of cookies samples was measured using a colourimeter (CR-400; Konica Minolta, Inc., Tokyo, Japan). The first colour measurement was acquired 24 h after baking to ensure and appropriate cooling before the readings. The results were expressed in terms of L^* , lightness (values from 0 to 100%); a^* , redness to greenness (60 to -60, respectively); b^* , yellowness to blueness (60 to -60, respectively), according to the CIELab system. The total colour difference (ΔE^*) between sample cookies along storage time (30 days), as well as between raw dough and cooked samples, was determined using L^* , a^* and b^* average values, according to equation (6). The measurements were conducted using a white standard ($L^* = 93.90$, $a^* = 0.3158$, $b^* = 0.3321$), under artificial fluorescent light at room temperature. Three replicates were analysed for each formulation, with five measurement locations per cookie, including the centre and its surrounding (Batista et al., 2017).

$$\Delta E^* = [(\Delta L^*)^2 + (\Delta a^*)^2 + (\Delta b^*)^2]^{\frac{1}{2}} \quad (6)$$

2.7.2. Texture analysis

The cookies' texture was evaluated using a Texture Analyser TA-HDplus Stable MicroSystem (Godalming, Surrey, UK) in penetration mode, with a 2 mm cylindrical stainless probe, a target distance of 4 mm and speed test of 0.5 mm s^{-1} . The resistance to penetration (or hardness) was measured by the peak force in the force-time graph (N.s). Measurements were repeated five times for each formulation sample (one measurement per cookie).

2.7.3. Water activity determination

The cookies water activity (a_w) was determined using an Aqualab 4 TE Water Activity Meter (Meter Group, Inc., Pullman, USA) at 25 ± 0.5 °C. Measurements were repeated three times for each formulation as a crushed powder.

2.7.4. Antioxidant activity

The antioxidant activity of the cookies was evaluated following the methods described in section 2.3 in triplicate; however, with results expressed per gram of cookie instead. For the extraction of cookies antioxidant fraction, aliquots of 0.5 g of the control, free and encapsulated extract cookies, previously milled with a mortar and pestle, were mixed with 2.5 mL of 75 mmol.L-1 phosphate buffer at pH 7.4 on a vortex for 1 min; and followed by centrifugation at 9000 rpm for 10 min. This process was repeated twice, and supernatants were combined and filtered through a $0.45 \mu\text{m}$ syringe filter. Antioxidants from cookies containing *A. platensis* biomass were recovered by ultrasound-assisted extraction for 1 h, using 5 mL of 75 mmol.L-1 phosphate buffer at pH 7.4 as the solvent.

2.8. Statistical analysis

Statistical analysis of the experimental data was performed through the *t*-test or analysis of variance (one way ANOVA), followed by Tukey's Post Hoc test at a significance level of 95% ($p < 0.05$), using the software GraphPad Prism 5.0. All results were presented as mean \pm standard deviation. Design of Experiments (DoE) and its statistical analysis were performed using Statsoft Inc. Statistica™ (version 13).

3. Results and discussion

3.1. Optimization of *A. platensis* antioxidants extraction

For a practical application in the food industry, antioxidants should be first extracted; however, the extraction process efficiency may affect its availability (Wardhani, Vásquez, & Pandiella, 2010). Recently, ultrasonic-assisted extraction (UAE) has been widely employed for the recovery of target compounds from many natural products due to its facilitated mass transfer between immiscible phases, through super

agitation at low frequency. The enhanced extraction obtained by ultrasounds is mostly attributed to the acoustic cavitation produced in the solvent by the passage of an ultrasound wave. Moreover, UAE also exerts a mechanical effect, allowing greater penetration of solvent into the cell wall, increasing the contact surface area between the solid and liquid phase. As a result, the solute quickly diffuses from the solid phase to the solvent, increasing bioactive recovery when compared to conventional methods (Haque, Dutta, Thimmanagari, & Chiang, 2016; Kurd & Samavati, 2015; Liu, Wei, & Liao, 2013; Zou, Jia, Li, Wang, & Wu, 2013).

Various parameters play a significant role in optimizing the experimental conditions for the development of an extraction method. Extraction time, temperature and the solid-to-liquid ratio are generally considered to be the most critical factors that affect bioactive recovery. The choice of an extracting solvent is also a crucial step towards extraction optimization; different solvents will yield different extract amounts and composition. In the present study, water and ethanol were employed as extraction solvents for the microalga *A. platensis* considering food application safety (Chaiklahan et al., 2013; Zou et al., 2013).

The recovery of antioxidant compounds from *A. platensis* biomass was optimised through a Design of Experiments (DoE) approach, using a 2^k full factorial design with 2 factors. The effect of ethanol/water and biomass/solvent ratios on the antioxidant activity (ORAC and ABTS) and total phenolic content (TPC) were analysed as response variables (see Table 1). All the response curves exhibited an excellent fitting ($r^2 = 0.99$) and statistical significance. The response surfaces after 30 min and 1 h of ultrasound treatment are represented in Fig. 1. It is possible to notice that the phenolic content increased proportionally with the amount of microalga. Additionally, increasing the treatment time to 1 h promoted a higher phenolic content, which was also higher with increasing *A. platensis* content. Nevertheless, the recovery of phenolic compounds was more efficient at 0% ethanol independently of the time. The ABTS exhibited a similar trend; although in this case, the extraction time was crucial, being the antioxidant activity at 1 h more than 2.5-fold higher than at 30 min. The ORAC assay corroborated the ABTS results, pointing out that to obtain an extract with high antioxidant activity, the ultrasound treatment should be performed during 1 h with 2.0% biomass and 0% ethanol. After freeze-drying the liquid extract obtained in this condition, 0.4 g of dry antioxidant extract was obtained per gram of biomass. This extract was used for the cookie formulation experiments.

3.2. Cookie dough characterization

Cookies quality is influenced by several factors, such as the quality and amount of ingredients used, processing conditions and moulding of the dough, as well as baking and cooling of the cookies. Among those factors, dough rheology is of considerable importance in cookies manufacture as it influences the dough machinability and the final sensorial characteristics. Doughs with extreme degrees of firmness or softness will not process satisfactorily on the dough forming equipment and will not yield adequate products (Manohar & Rao, 2002).

In this work, cookies were shaped through a 3D food printer, where the main physical properties involved can be divided into two categories: firstly the ones that affect the extruding process, which includes the flow behaviour and viscous modulus (G'') of the dough; and secondly, the factors which influence the ability to support the three dimensional structure of the printed products or to maintain its shape and structure, such as the elastic modulus (G'), gel strength, among others (Yang, Zhang, Prakash, & Liu, 2018).

Initially, cookies doughs were characterized through a creep-recovery test and texture analysis. During the creep-recovery assay, a stress is applied for a specific interval, it is then removed, and the recovery is monitored for another period. This property provides information about the ability of the sheared and micro-extruded food-ink to recover; therefore, the faster the recovery, the higher shape fidelity

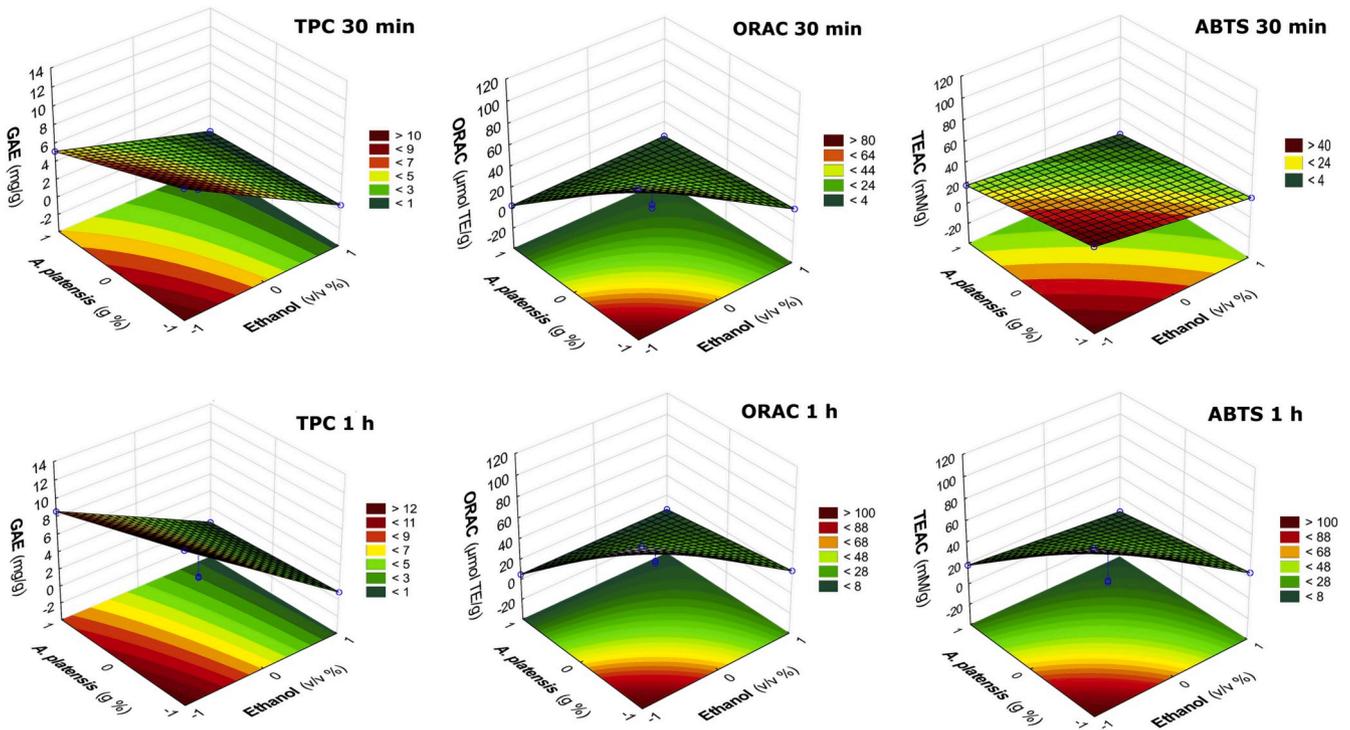


Fig. 1. Response surfaces of the biomass and ethanol concentrations combined effect in *A. platensis*' antioxidant activity and TPC.

should be expected. Likewise, less strain during the test indicates a stronger ability of the material to maintain the shape and structure of printed products; which, however, will also require higher extrusion rates (Yang, Zhang, Fang, & Liu, 2019).

Fig. 2a shows the creep–recovery curves expressed by a compliance

variation (J) as a function of time, which is the ratio of the deformation γ to the applied stress τ . Dough deformation could be used to characterize its strength, which means the harder the dough, the higher the amount of energy required to achieve the same deformation when compared with a softer dough. Accordingly, if a material has a high compliance, it

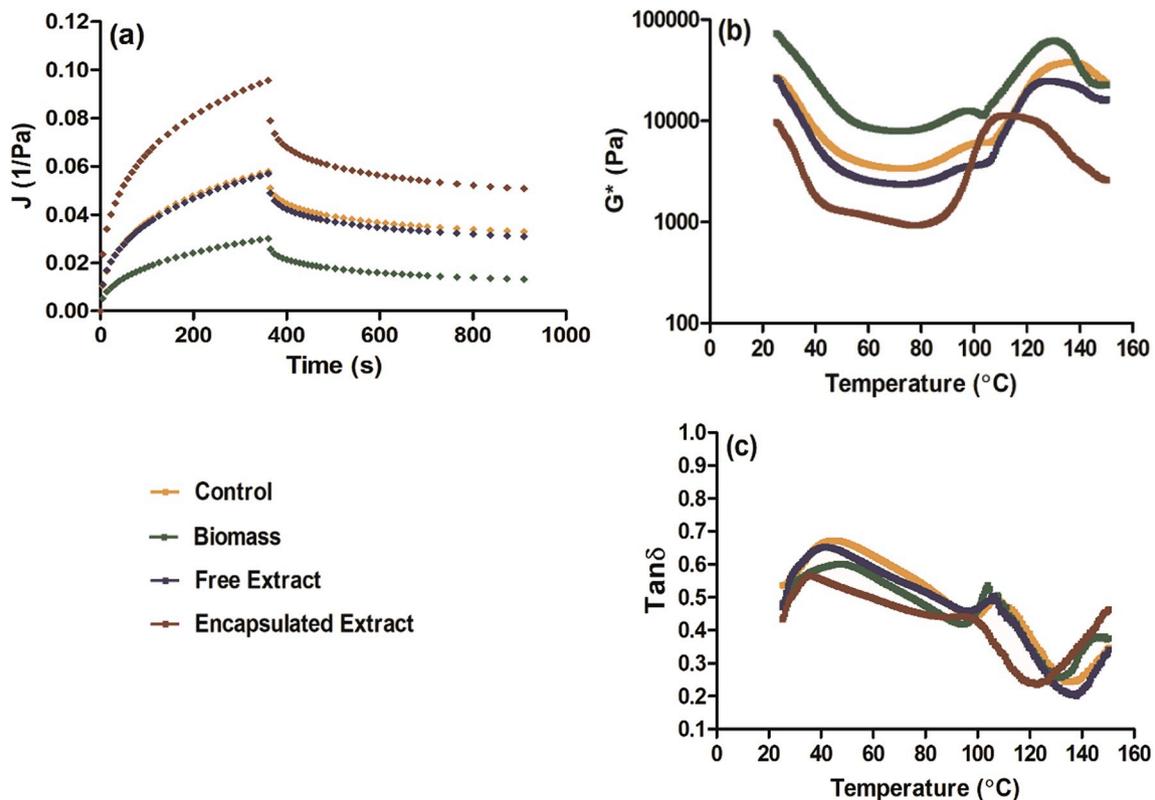


Fig. 2. Dough rheology analyses. (a) Creep–recovery curves and temperature-sweep profiles represented by G^* (b) and $\tan \delta$ (c) against temperature.

will present low rigidity and high deformation or strain; and, consequently, better extrudability (Ahmed, 2015). The cookie dough incorporated with encapsulated extract showed higher maximal strain or compliance with the applied stress, while the one prepared with microalga biomass led to a more stiff dough (Table 3). The replacement of a small amount of flour by microalga biomass resulted in the inclusion of a complex biological ingredient, rich in proteins and polysaccharides. These molecules have an important role in the water absorption process, which promote the increase of dough firmness (Bolanho et al., 2014; Gouveia, Batista, Miranda, Empis, & Raymundo, 2007; Gouveia et al., 2008). On the other hand, the encapsulated antioxidant extract dough led to an unstructured network due to the water molecules present among the calcium-alginate microbeads, resulting in a reduction of its viscosity. Furthermore, the addition of the free antioxidant extract did not change the dough behaviour, matching with the one observed for the control cookies.

The creep and recovery stages were fitted to Burger's model (Eqs. (2) and (3), respectively) and results are shown in Table 3. The instantaneous elastic compliance (J_{0C}), viscoelastic compliance (J_{1C}) and the steady viscosity (μ_0) corroborated with Fig. 2a. Biomass cookie dough revealed high μ_0 and lower compliances, which means that the higher the steady-state viscosity, the higher the resistance to deformation. The opposite behaviour was observed for the encapsulated extract dough, which presented higher compliances and lower steady-state viscosity; therefore, less resistance to deformation.

Contrastingly, retardation time (λ) did not show the same behaviour, and only the biomass and the encapsulated extract doughs were significantly different ($p < 0.05$). However, this parameter agrees with the compliance results. The retardation time (λ) mainly indicates the time required for the sample strain to decay to the initial value at $1/e$, and the less stiff dough (encapsulated extract) showed higher (λ). The recovery phase exhibited similar behaviour, with elastic compliance (J_{0C}), viscoelastic compliance (J_{1C}) and the steady viscosity (μ_0) following the same tendency. More stiff doughs take longer to deform, and also to recover their structure. Nevertheless, despite the differences, the elastic portion of the dough did not differ significantly ($p < 0.05$) among all formulations.

Concerning the texture analysis, all doughs incorporated with different forms of *A. platensis* presented significant differences ($p < 0.05$) when compared to the control. As it can be observed in Fig. 3, the biomass cookie dough showed higher hardness, which agrees with the creep-recovery results. Nevertheless, the dough incorporated with the free extract, which had similar rheological behaviour as the control, exhibited a low hardness value. This decrease of hardness could be attributed to the reduced flour mass and its substitution for components of the freeze-dried antioxidant extract. Those constituents may further

bind with water molecules through hydrogen bonds, suppressing the water absorption and the gluten protein swelling. Consequently, the free extract dough displayed a lower network strength, comparable to the one with encapsulated extract (Liu, Liang, Saeed, Lan, & Qin, 2019).

The dough properties during the cooking process were evaluated through a temperature-sweep analysis and results revealed that the obtained profiles were consistent with that of the creep-recovery test. Fig. 2b and c show the viscoelastic properties (complex modulus and $\tan \delta$) against temperature increase. G^* reflects both contribution of elastic (G') and viscous (G'') moduli; while $\tan \delta$, which character prevail, is defined as G''/G' . In the mechanical spectra, $\tan \delta$ was lower than 1 ($G' > G''$) for all temperatures, indicating that all doughs behave as a gel-like material. The dough incorporated with *A. platensis* biomass exhibited higher G^* values, as the biomass composition promotes a more structured network. Oppositely, the encapsulated extract dough presented lower G^* values due to its reduced viscosity. Nonetheless, $\tan \delta$ spectra did not show great differences, as the proportion between elastic and viscous moduli was similar for all formulations.

Moreover, throughout the temperature-sweep profile it is also possible to detect a continuous decrease in G^* up to 40 °C, which may be related to the melting of the butter that accounts for a significant part (25 g/100 g) of the dough, as equally observed by Kim et al. (2019). Afterwards, the modulus remains almost constant until 105–110 °C, when it starts to increase. Nevertheless, this phenomenon occurred at a lower temperature for cookies incorporated with encapsulated extract (~90 °C). When the temperature rose to above 120 °C, a further decrease of G' and G'' was detected. It is inferred that the pyrolytic

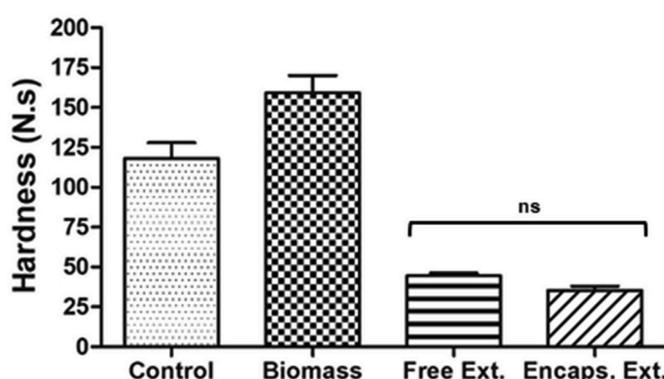


Fig. 3. Texture analysis of the cookie doughs incorporated with different forms of *A. platensis*. Results are presented as mean \pm standard deviation. The term "ns" denotes a not statistically significant difference.

Table 3

Creep-recovery analysis of the cookies doughs incorporated with different forms of *A. platensis*. Results are presented as mean \pm standard deviation.

Dough	Creep						r^2
	Compliance (1/Pa)		Retardation time (s) λ_{1C}	Coefficient of viscosity (Pa.s) η_0	Max. Strain (%)	Max. Compliance (1/Pa)	
	J_{0C}	J_{1C}					
Control	0.0037 ^b \pm 0.0002	0.0256 ^b \pm 0.0009	29.46 ^{ab} \pm 3.26	12169 ^a \pm 11	3.09 ^b \pm 0.06	0.056 ^b \pm 0.001	0.99
Biomass	0.0017 ^a \pm 0.0003	0.0111 ^a \pm 0.0018	31.60 ^b \pm 1.15	24343 ^b \pm 4073	1.45 ^a \pm 0.24	0.026 ^a \pm 0.004	0.99
Free Extract	0.0039 ^b \pm 0.0003	0.0265 ^b \pm 0.0023	28.75 ^{ab} \pm 1.56	11827 ^a \pm 27	3.18 ^b \pm 0.14	0.058 ^b \pm 0.003	0.99
Encapsulated Ext.	0.0073 ^c \pm 0.0007	0.0484 ^c \pm 0.0037	22.29 ^a \pm 1.48	7118 ^a \pm 741	5.54 ^c \pm 0.50	0.109 ^c \pm 0.002	0.99
Dough	Recovery						r^2
	Compliance (1/Pa)		Retardation time (s) λ_{1R}	Equilibrium strain (%)	Equilibrium compliance (1/Pa)	Relative elastic portion (%)	
	J_{0C}	J_{1C}					
Control	0.0055 ^b \pm 0.0002	0.0169 ^b \pm 0.0011	87.00 ^b \pm 6.40	1.82 ^a \pm 0.01	0.0330 ^a \pm 0.0003	58.90 ^a \pm 1.60	0.90
Biomass	0.0033 ^a \pm 0.0006	0.0109 ^a \pm 0.0018	102.70 ^b \pm 5.20	0.65 ^a \pm 0.11	0.012 ^a \pm 0.002	44.60 ^a \pm 0.20	0.93
Free Extract	0.0062 ^b \pm 0.0002	0.0179 ^b \pm 0.0000	85.50 ^b \pm 2.70	1.80 ^a \pm 0.15	0.033 ^a \pm 0.003	56.70 ^a \pm 2.20	0.95
Encapsulated Ext.	0.0115 ^c \pm 0.0004	0.0294 ^c \pm 0.0004	64.60 ^a \pm 3.20	3.18 ^b \pm 0.55	0.058 ^b \pm 0.010	53.30 ^a \pm 10.50	0.94

decomposition and leaching of the amylose in flour starch granule were induced, which may have caused the corresponding decrease (Kim et al., 2019).

3.3. 3D printing and post-processing

3D food printing is a digital manufacturing technology, which is used to fabricate three-dimensional structures in a layer-by-layer manner, using liquid-, gel-, or powder-type food materials as a printing medium; it includes three steps: modelling, 3D printing and post-processing. A range of 3D printing methods have been utilized for food printing, such as selective laser sintering/hot air sintering, hot-melt extrusion/room temperature extrusion, binder jetting, and inkjet printing (Holland, Tuck, & Foster, 2018; Portanguen, Tournayre, Sicard, Astruc, & Mirade, 2019; Sun, Zhou, Huang, Fuh, & Hong, 2015). Among them, extrusion-based 3D food printing is the most widely adopted method, which consists of a material being extruded through a nozzle moving in x-, y- and z-direction, building up a structure layer-by-layer (Kim et al., 2019; Sun et al., 2018).

For a successful 3D printing step, it is required a material which can be smoothly extruded through the nozzle and, at the same time, can support the weight of the subsequent printed layers without deformation. In this context, the knowledge of the material's rheological and mechanical profiles is imperative to achieve proper extrudability and structure stability during the process (Liu, Zhang, Bhandari, & Yang, 2018b; Wang, Zhang, Bhandari, & Yang, 2018; Yang et al., 2018). Furthermore, 3D food printing is not only affected by the physico-chemical properties of the ingredients used, but also by the process parameters, such as nozzle moving speed, extrusion rate, nozzle diameter, and layer and nozzle heights. This correlation between the food formula attributes and the operational conditions influences the printing precision and, thus, is a key factor in the end-product quality (Dankar et al., 2018; He, Zhang, & Fang, 2019; Pérez, Nykvist, Brøgger, Larsen, & Falkeborg, 2019).

Lastly, the printed food pieces may require a further post-deposition cooking process (e.g. baking and boiling), which involves different levels of heat penetration in the food matrix; resulting in texture modifications and, possibly, misshapen structures (Dankar et al., 2018; Sun et al., 2018). Cookie dough is a material that unavoidably requires post-processing; however, it rapidly deforms after baking. Kim et al. (2019) have studied the addition of hydrocolloids as a structuring agent, aiming to suppress product deformation in the high-temperature environment of the post-processing step, whereas maintaining the ingredients and product characteristics of the desired cookie. Xanthan gum in the concentration of 0.5% was reported to promote the best shape accuracy of the selected 3D printed model after the baking process; therefore, it was chosen to develop the functional cookies of this work.

3D food printing is a tool which allows the creation of unique, innovative, products that other methods cannot emulate. Among numerous applications, this technology is becoming popular due to the possibility to design foods with appealing forms, new textures and personalized nutritional values, where several raw materials can be blended according to individual's physical and nutritional status. Additionally, this 3D printing flexibility enables the use of alternative ingredients in food processing, such as microalgae, insects and fungi; in the production of tasty, healthy and tailored foods (An, Guo, Zhang, & Zhong, 2019; Godoi, Prakash, & Bhandari, 2016; Lille, Nurmela, Nordlund, Metsä-Kortelainen, & Sozer, 2018; Severini, Azzollini, Albenzio, & Derossi, 2018; Voon, An, Wong, Zhang, & Chua, 2019).

Fig. 4 shows the 3D printed cookies incorporated with different forms of the microalga *A. platensis* right after the 3D printing step and after the post-processing treatment.

All 3D printed cookies presented shape fidelity in the range of $100 \pm 5.0\%$, demonstrating dimensional consistency with the 3D model (Fig. 5a). The effect of the cooking process over the cookies is showed in

Fig. 5b. Upon baking, the cookie thickness varied from 3.37% for the biomass cookies, until 18.22% for the encapsulated extract cookies. The increase in this dimension is related to the gas production from the water vaporization and a higher dough elasticity, which explains the fact that the cookies incorporated with fresh alginate microbeads have an enlargement superior to the other formulations, corroborating the results obtained in the rheology analyses (Chevallier, Della Valle, Colonna, Broyart, & Trystram, 2002).

Oppositely, the diameter of the cookies had a smaller variation after the post-processing treatment, as it can also be observed in Fig. 5b. Except for the encapsulated extract cookies, which suffered a shrinkage of around 7% probably due to the high water loss, all the other formulations suffered a positive influence of the temperature during baking. The heat promotes the melting of fat, which confers plasticity and an ease flow, resulting in an initial spreading followed by a width retraction at the end of the process (Walker, Seetharaman, & Goldstein, 2012).

3.4. Cookies physical-chemical characterization

A number of parameters can be scrutinized from baked cookies that are of crucial importance to determine their adequacy. Colour is an attribute which impacts food quality, contributing to consumer's attraction to a product. The incorporation of *A. platensis* in different forms into cookie doughs stimulated a decrease in luminosity when compared to the control, which was more prominent in the biomass and free extract cookies (Fig. 6). Biomass cookies were distinguished by the microalga green tonality, showing negative values of a^* ; while the free extract cookies tended to the blue colour, represented by the C-phyco-cyanin distinctive pigmentation (Lucas, Morais, Santos, & Costa, 2018).

Table 4 presents the total colour differences (ΔE^*) between the raw dough and baked cookies, as well as the differences for each formulation over 30 days of storage time. *A. platensis* cookies showed significantly colour variation upon baking, with ΔE^* varying from 17.47 to 25.50. This outcome may be explained primarily by the browning of cookie surface (lightness decrease and colour parameter increase), possibly due to formation of Maillard reaction products (MRP) through the interaction of reducing sugars with proteins, but also possibly owing to starch dextrinization and sugar caramelization. Moreover, changes in tonality may be related to pigment loss upon exposure to high temperatures (Batista et al., 2017; Chevallier et al., 2002).

On the other hand, along the conservation time, all cookie formulations presented a low ΔE^* , principally the encapsulated extract cookie. According to Mokrzycki and Tatol (2011), ΔE^* values between 1 and 2 indicate that only experienced observers can notice a colour difference, and values between 2 and 3.5 suggest that an inexperienced observer is also able to see the difference. Hence, it is possible to conclude that the encapsulation of *A. platensis* extract improved the cookie colour stability during the 30 days of storage time, when compared to other formulations.

Another essential physical stability factor, which gives an identity to a food product, is the texture (Carter, Galloway, Campbell, & Carter, 2015). In this work, the cookie's texture was evaluated through a penetration test, and the results are represented in Fig. 7. As it has been stated for the cookie dough texture analysis (see section 3.2), the addition of *A. platensis* biomass promoted an increase in the cookie hardness. Inversely, the incorporation of microalgae antioxidant extract in fresh alginate microbeads resulted in a softer texture, which it was expected considering the water molecules present among the microparticles. Finally, over the 30 days of storage time, there was no significant difference ($p > 0.05$) in the cookie texture for all the developed formulations.

The incorporation of *A. platensis* into cookies by conventional methods has been described in the literature by a few authors, promoting different effects on the final product texture. Onacik-Gür, Zbi-kowska, and Majewska (2018) evaluated the addition of 1%, 2% and 3% of microalga powder and reported a decrease in the cookies hardness



Fig. 4. 3D printed cookies incorporated with different forms of *A. platensis*. First row: after the 3D printing step; second row: after the baking process.

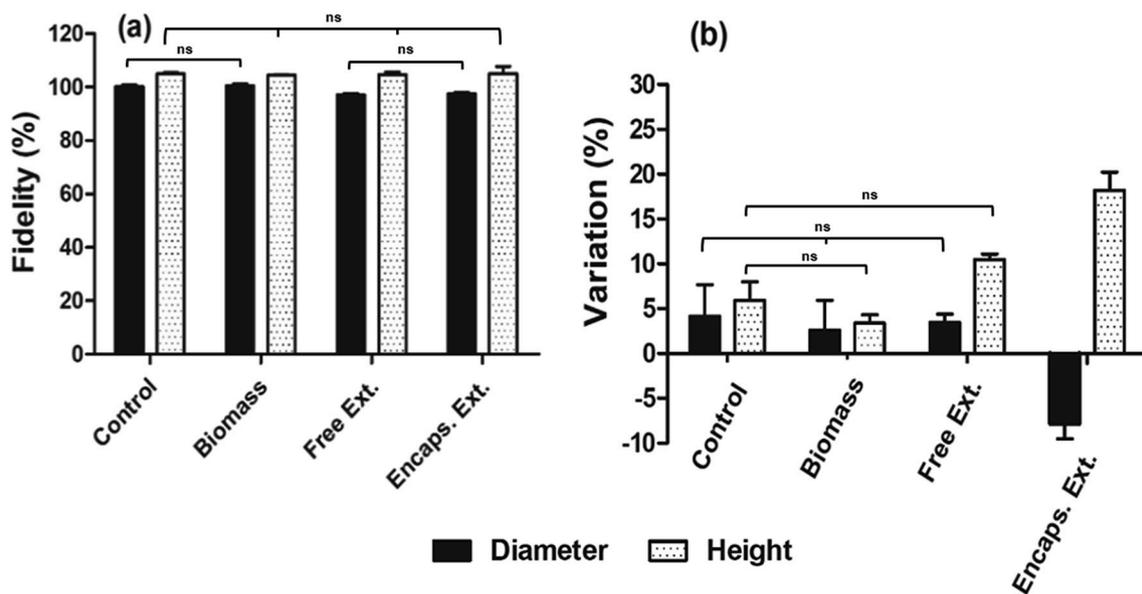


Fig. 5. (a) Shape fidelity of the raw 3D printed cookies and (b) Effect of the cooking process on the 3D cookies measures. Results are presented as mean \pm standard deviation. The term “ns” denotes a not statistically significant difference.

with the increase of microalga concentration. On the other hand, Marcinkowska-Lesiak, Onopiuk, Zalewska, Ciepluch, and Barotti (2017) incorporated different powder amounts of the same species into short-bread biscuits, which promoted an increase in the cookie hardness directly proportional to the addition of microalga powder; therefore, corroborating with the results found for the 3D printed cookies of this study.

Concomitantly with the food texture, water activity (a_w) is also a significant parameter regarding the conservation of low moisture cookies, particularly for the maintenance of a crispy texture. Furthermore, the food physical-chemical and microbiological stability depend greatly on the water content and its interaction with food ingredients. Water activity is a measure of the availability of water molecules to enter into microbial, enzymatic or chemical reactions. Therefore, this parameter has been used to assess the potential microbial growth and chemical stability of foods after manufacture. It is established that bacteria do not grow at a_w values of 0.80 or below, while the limit for mould and yeast growth is 0.6 (Hough, Buera, Chirife, & Moro, 2001; Khouryieh & Aramouni, 2012). As Fig. 7 shows, all cookie formulations presented a_w values below 0.3 throughout the 30 days of storage, indicating high microbiological stability.

3.4.1. Antioxidant activity

The microalga *A. platensis* is recognized to have notable free radical scavenging properties and antioxidant activity, due to the presence of natural pigments and other bioactive compounds in its composition. Its light-harvesting protein-pigment complexes called phycobilisomes are composed by phycobiliproteins, where C-phycoerythrin and allophycocyanin are considered the most important ones. Moreover, this microalga contains phenolic compounds and a spectrum of natural mixed carotene and xanthophyll phytopigments that, together with phycoerythrin, seem to be related to its distinguished antioxidant activity (Batista et al., 2017; Zaid, Hammad, & Sharaf, 2015).

The 3D printed cookies developed in this work had their antioxidant capacity evaluated through the ORAC and ABTS assays after the post-processing step and after 30 days of storage (Fig. 8). After the storage period, the encapsulated extract cookie exhibited a significantly higher ($p < 0.05$) ORAC value compared to all other formulations, showing its improvement against processing and environmental factors. On the other hand, no significant difference between the formulations was found for ABTS assay. One possible explanation for this discrepancy could be due to the differences in the mechanism of action of those antioxidant analyses. The ORAC assay measures the affinity of antioxidative compounds to neutralize the free radicals over a period of time, accounting for any potential lag phases in antioxidant activity

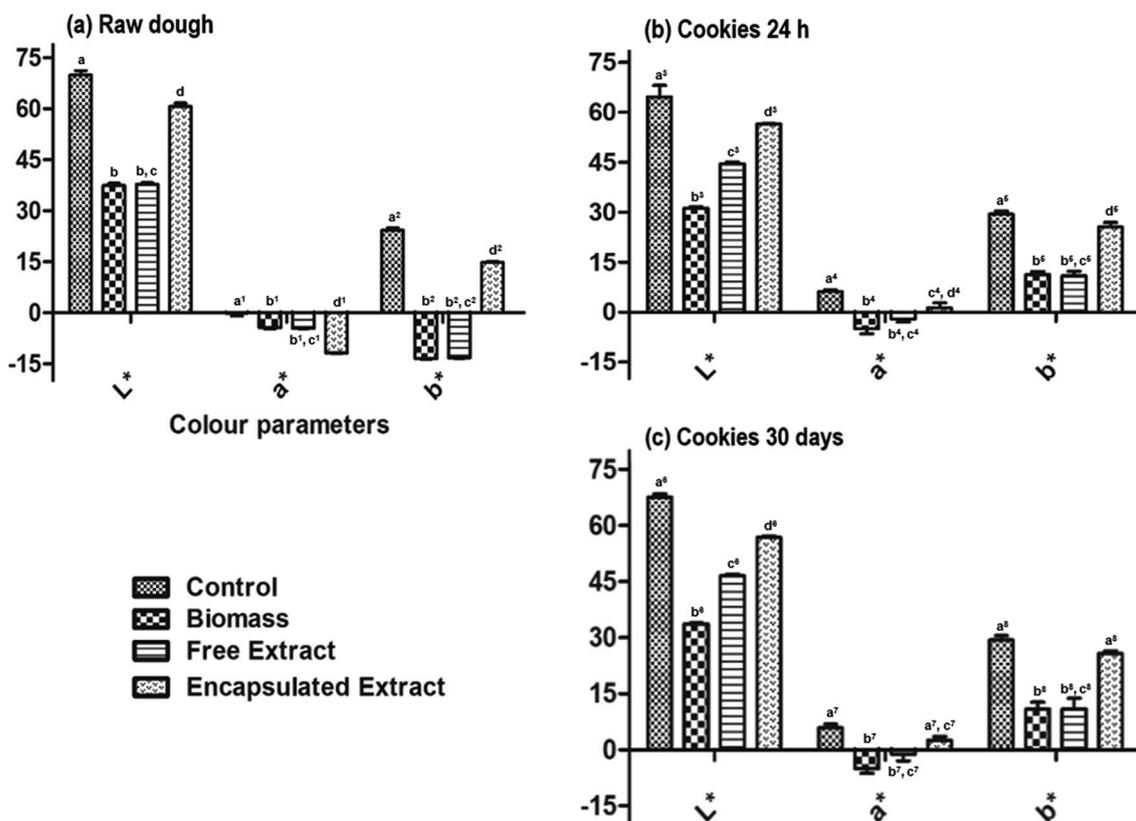


Fig. 6. Colour parameters L^* , a^* and b^* for the raw cookie doughs and for the baked cookies after 24 h and c) baked cookies after 30 days. Results are presented as mean \pm standard deviation. For results with the same letter, the difference between the means is not statistically significant.

Table 4

Total colour variation (ΔE^*) between cooked and raw cookie samples and colour stability along conservation time.

Total colour difference (ΔE^*)	Raw vs. Baked	24 h vs. 30 days
Control	9.71	2.85
Biomass	25.50	2.43
Free Extract	25.29	2.12
Encapsulated Extract	17.47	1.30

rather than providing a measurement of only fast acting antioxidants; whereas the ABTS assay neutralize free radicals at a particular point of time without accounting for slow-acting antioxidants (Nayak, Liu, & Tang, 2015).

Additionally, it is noticeable that antioxidant capacity was also found for the cookies with no incorporation of *A. platensis* (control). Cookies are usually prepared with reducing sugars and a protein source, which leads to the formation of MRPs. Those compounds are one of the main responsible for the browning process characteristic of many foods, and it

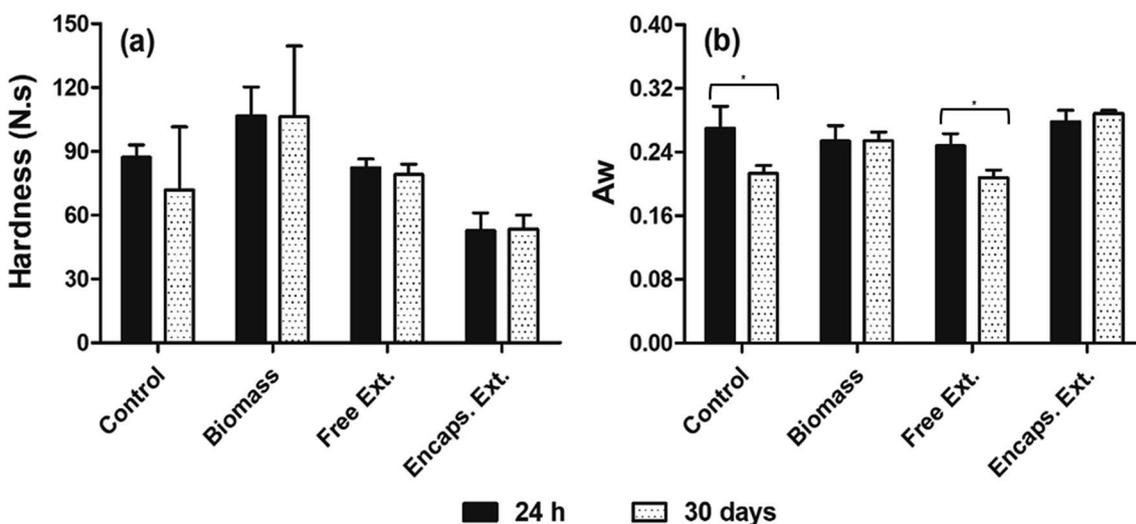


Fig. 7. Texture (a) and water activity (b) analyses of the 3D printed cookies incorporated with different *A. platensis* forms over 30 days of storage time. Results are presented as mean \pm standard deviation. The label “*” denotes a statistically significant difference.

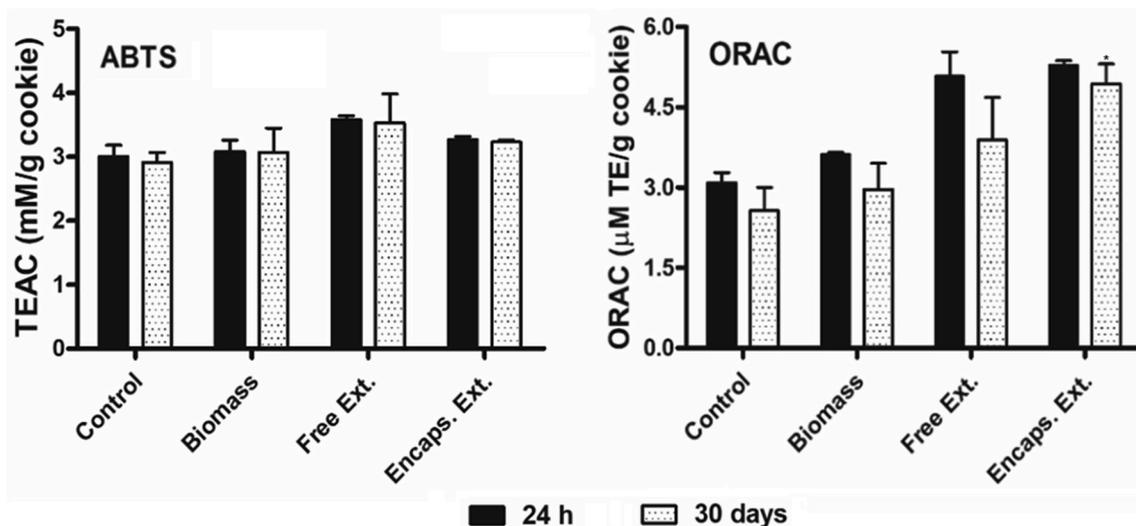


Fig. 8. Antioxidant activity of the 3D printed cookies incorporated with different *A. platensis* forms over 30 days of storage time. Results are presented as mean \pm standard deviation. The label “****” denotes a difference statistically significant with respect to other formulations at the same sampling time (30 days).

has been associated to an increase of their antioxidant potential (Nooshkam, Varidi, & Bashash, 2019; Yilmaz & Toledo, 2005).

According to Manzocco, Calligaris, Mastrocola, Nicoli and Lerici (2000), it can be stated that in the development of the Maillard reaction, there is a positive correlation between colour and antioxidant properties. This correlation was found in foods where Maillard reaction was the sole or the prevalent event related to the antioxidant activity. Such circumstance generally occurs in food products with no or low content of naturally occurring antioxidants; which means that eventual changes in the antioxidant capacity upon processing are only due to the formation of heat-induced antioxidants. Given that, the antioxidant capacity found for the control cookies could be explained by the formation of MRPs, as antioxidant compounds are absent in its composition.

4. Conclusions

The microalga *A. platensis* was used as a source of antioxidants in the development of 3D printed cookies, based on functional food-inks. The antioxidant extraction was optimised through a DoE approach. Optimal conditions were 1 h extraction, with 0% ethanol and 2.0% biomass. All cookie dough formulations were suitable for extrusion, forming a homogenous filament with a diameter close to the nozzle aperture, and presenting dimensional consistency with the 3D model after the post-deposition step. Furthermore, the fortification with *A. platensis* resulted in 3D printed cookies with an innovative appearance. The encapsulation of the antioxidant extract was capable of improving the antioxidant activity and colour stability along the storage time when compared to all other formulations. Therefore, cookies developed in a 3D printer could be considered a promising alternative for the incorporation of new ingredients, such as microalgae, to obtain a novel functional food with antioxidant properties.

Declaration of competing interest

The authors declare no conflict of interest.

CRedit authorship contribution statement

Marta V. Vieira: Conceptualization, Methodology, Investigation, Formal analysis, Visualization, Writing - original draft. **Sara M. Oliveira:** Conceptualization, Methodology, Investigation, Formal analysis, Visualization, Writing - original draft. **Isabel R. Amado:** Methodology, Investigation, Writing - review & editing. **Luiz H. Fasolin:**

Methodology, Investigation. **Antonio A. Vicente:** Supervision, Writing - review & editing. **Lorenzo M. Pastrana:** Writing - review & editing, Supervision, Funding acquisition. **Pablo Fuciños:** Conceptualization, Writing - review & editing, Supervision, Funding acquisition.

Acknowledgement

This work was funded by the European Union INTERREG Atlantic Area Programme and the European Regional Development Fund (ERDF) through the project “Enhance Microalgae: High added-value industrial opportunities for microalgae in the Atlantic Area” (Ref. EAPA_338/2016).

References

- Ahmed, E. M. (2015). Hydrogel: Preparation, characterization, and applications: A review. *Journal of Advanced Research*, 6, 105–121. <https://doi.org/10.1016/j.jare.2013.07.006>.
- An, Y. J., Guo, C. F., Zhang, M., & Zhong, Z. P. (2019). Investigation on characteristics of 3D printing using *Nostoc sphaeroides* biomass. *Journal of the Science of Food and Agriculture*, 99, 639–646. <https://doi.org/10.1002/jsfa.9226>.
- Batista, A. P., Nicolai, A., Fradinho, P., Fragoso, S., Bursic, I., Rodolfi, L., et al. (2017). Microalgae biomass as an alternative ingredient in cookies: Sensory, physical and chemical properties, antioxidant activity and in vitro digestibility. *Algal Research*, 26, 161–171. <https://doi.org/10.1016/j.algal.2017.07.017>.
- Betoret, E., Betoret, N., Vidal, D., & Fito, P. (2011). Functional foods development: Trends and technologies. *Trends in Food Science & Technology*, 22, 498–508. <https://doi.org/10.1016/j.tifs.2011.05.004>.
- Bigliardi, B., & Galati, F. (2013). Innovation trends in the food industry: The case of functional foods. *Trends in Food Science & Technology*, 31, 118–129. <https://doi.org/10.1016/j.tifs.2013.03.006>.
- Bolanho, B. C., Egea, M. B., Jácome, A. L. M., Campos, I., De Carvalho, J. C. M., & Danesi, E. D. G. (2014). Antioxidant and nutritional potential of cookies enriched with *Spirulina platensis* and sources of fibre. *Journal of Food and Nutrition Research*, 53, 171–179.
- Carter, B. P., Galloway, M. T., Campbell, G. S., & Carter, A. H. (2015). The critical water activity from dynamic dewpoint isotherms as an indicator of crispness in low moisture cookies. *Journal of Food Measurement and Characterization*, 9, 463–470. <https://doi.org/10.1007/s11694-015-9254-3>.
- Chaiklahan, R., Chirasuwan, N., Triratana, P., Loha, V., Tia, S., & Bunnag, B. (2013). Polysaccharide extraction from *Spirulina* sp. and its antioxidant capacity. *International Journal of Biological Macromolecules*, 58, 73–78. <https://doi.org/10.1016/j.ijbiomac.2013.03.046>.
- Chevallier, S., Della Valle, G., Colonna, P., Broyart, B., & Trystram, G. (2002). Structural and chemical modifications of short dough during baking. *Journal of Cereal Science*, 35, 1–10. <https://doi.org/10.1006/jcrs.2001.0388>.
- Czerwinka, A., Kalawaj, K., Stawińska-Brych, A., Lemieszek, M. K., Bartnik, M., et al. (2018). Anticancer effect of the water extract of a commercial *Spirulina* (*Arthrospira platensis*) product on the human lung cancer A549 cell line. *Biomedicine & Pharmacotherapy*, 106, 292–302. <https://doi.org/10.1016/j.biopha.2018.06.116>.
- Da Silva, S. C., Fernandes, I. P., Barros, L., Fernandes, A., José, M., et al. (2019). Spray-dried *Spirulina platensis* as an effective ingredient to improve yogurt formulations:

- Testing different encapsulating solutions. *Journal of Functional Foods*, 60, 103427. <https://doi.org/10.1016/j.jff.2019.103427>.
- Dankar, I., Haddarah, A., Omar, F. E. L., Sepulcre, F., & Pujolà, M. (2018). 3D printing technology: The new era for food customization and elaboration. *Trends in Food Science & Technology*, 75, 231–242. <https://doi.org/10.1016/j.tifs.2018.03.018>.
- Dávalos, A., Gómez-Cordovés, C., & Bartolomé, B. (2004). Extending applicability of the oxygen radical absorbance capacity (ORAC-Fluorescein) assay. *Journal of Agricultural and Food Chemistry*, 52, 48–54. <https://doi.org/10.1021/jf0305231>.
- Day, L., Seymour, R. B., Pitts, K. F., Konczak, I., & Lundin, L. (2009). Incorporation of functional ingredients into foods. *Trends in Food Science & Technology*, 20, 388–395. <https://doi.org/10.1016/j.tifs.2008.05.002>.
- El-Baz, F. K., El-Senousy, W. M., El-Sayed, A. B., & Kamel, M. M. (2013). In vitro antiviral and antimicrobial activities of *Spirulina platensis* extract. *Journal of Applied Pharmaceutical Science*, 3, 52–56. <https://doi.org/10.7324/JAPS.2013.31209>.
- Godoi, F. C., Prakash, S., & Bhandari, B. R. (2016). 3d printing technologies applied for food design: Status and prospects. *Journal of Food Engineering*, 179, 44–54. <https://doi.org/10.1016/j.jfoodeng.2016.01.025>.
- Gouveia, L., Batista, A. P., Miranda, A., Empis, J., & Raymundo, A. (2007). *Chlorella vulgaris* biomass used as colouring source in traditional butter cookies. *Innovative Food Science & Emerging Technologies*, 8, 433–436. <https://doi.org/10.1016/j.ifset.2007.03.026>.
- Gouveia, L., Coutinho, C., Mendonça, E., Batista, A. P., Sousa, I., et al. (2008). Functional biscuits with PUFA- ω 3 from *Ischrysis galbana*. *Journal of the Science of Food and Agriculture*, 88, 891–896. <https://doi.org/10.1002/jsfa>.
- Gouveia, L., Marques, A. E., Sousa, J. M., Moura, P., & Bandarra, N. M. (2010). Microalgae – source of natural bioactive molecules as functional ingredients. *Food Science & Technology Bulletin: Functional Foods*, 7, 21–37. <https://doi.org/10.1616/1476-2137.15884>.
- Haque, F., Dutta, A., Thimmanagari, M., & Chiang, Y. W. (2016). Intensified green production of astaxanthin from *Haematooccus pluvialis*. *Food and Bioprocess Processing*, 99, 1–11. <https://doi.org/10.1016/j.fbp.2016.03.002>.
- Herrero, M., Martín-Álvarez, P. J., Señoráns, F. J., Cifuentes, A., & Ibáñez, E. (2005). Optimization of accelerated solvent extraction of antioxidants from *Spirulina platensis* microalgae. *Food Chemistry*, 93, 417–423. <https://doi.org/10.1016/j.foodchem.2004.09.037>.
- He, C., Zhang, M., & Fang, Z. (2019). 3D printing of food: Pre-treatment and post-treatment of materials. *Critical Reviews in Food Science and Nutrition*, 1–14. <https://doi.org/10.1080/10408398.2019.1641065>, 0.
- Holland, S., Tuck, C., & Foster, T. (2018). Selective recrystallization of cellulose composite powders and microstructure creation through 3D binder jetting. *Carbohydrate Polymers*, 200, 229–238. <https://doi.org/10.1016/j.carbpol.2018.07.064>.
- Hough, G., Buera, M. D. P., Chirife, J., & Moro, O. (2001). Sensory texture of commercial biscuits as a function of water activity. *Journal of Texture Studies*, 32, 57–74. <https://doi.org/10.1111/j.1745-4603.2001.tb01034.x>.
- Hu, S., Fan, X., Qi, P., & Zhang, X. (2019). Identification of anti-diabetes peptides from *Spirulina platensis*. *Journal of Functional Foods*, 56, 333–341. <https://doi.org/10.1016/j.jff.2019.03.024>.
- Khouryieh, H., & Aramouni, F. (2012). Physical and sensory characteristics of cookies prepared with flaxseed flour. *Journal of the Science of Food and Agriculture*, 92, 2366–2372. <https://doi.org/10.1002/jsfa.5642>.
- Kim, H. W., Lee, I. J., Park, S. M., Lee, J. H., Nguyen, M. H., & Park, H. J. (2019). Effect of hydrocolloid addition on dimensional stability in post-processing of 3D printable cookie dough. *LWT - Food Science and Technology (Lebensmittel-Wissenschaft und -Technologie)*, 101, 69–75. <https://doi.org/10.1016/j.lwt.2018.11.019>.
- Kurd, F., & Samavati, V. (2015). Water soluble polysaccharides from *Spirulina platensis*: Extraction and in vitro anti-cancer activity. *International Journal of Biological Macromolecules*, 74, 498–506. <https://doi.org/10.1016/j.ijbiomac.2015.01.005>.
- Lafarga, T. (2019). Effect of microalgal biomass incorporation into foods: Nutritional and sensorial attributes of the end products. *Algal Research*, 41, 101566. <https://doi.org/10.1016/j.algal.2019.101566>.
- Lille, M., Nurmeela, A., Nordlund, E., Metsä-Kortelainen, S., & Sozer, N. (2018). Applicability of protein and fiber-rich food materials in extrusion-based 3D printing. *Journal of Food Engineering*, 220, 20–27. <https://doi.org/10.1016/j.jfoodeng.2017.04.034>.
- Liu, Y., Liang, X., Saeed, A., Lan, W., & Qin, W. (2019). Properties of 3D printed dough and optimization of printing parameters. *Innovative Food Science & Emerging Technologies*, 54, 9–18. <https://doi.org/10.1016/j.ifset.2019.03.008>.
- Liu, Y., Liu, D., Wei, G., Ma, Y., Bhandari, B., & Zhou, P. (2018a). 3D printed milk protein food simulant: Improving the printing performance of milk protein concentration by incorporating whey protein isolate. *Innovative Food Science & Emerging Technologies*, 49, 116–126. <https://doi.org/10.1016/j.ifset.2018.07.018>.
- Liu, Y., Wei, S., & Liao, M. (2013). Optimization of ultrasonic extraction of phenolic compounds from *Euryale ferox* seed shells using response surface methodology. *Industrial Crops and Products*, 49, 837–843. <https://doi.org/10.1016/j.indcrop.2013.07.023>.
- Liu, Z., Zhang, M., Bhandari, B., & Yang, C. (2018b). Impact of rheological properties of mashed potatoes on 3D printing. *Journal of Food Engineering*, 220, 76–82. <https://doi.org/10.1016/j.jfoodeng.2017.04.017>.
- Lopez-Rubio, A., Gavara, R., & Lagaron, J. M. (2006). Bioactive packaging: Turning foods into healthier foods through biomaterials. *Trends in Food Science & Technology*, 17, 567–575. <https://doi.org/10.1016/j.tifs.2006.04.012>.
- Lucas, B. F., Morais, M. G., Santos, T. D., & Costa, J. A. V. (2018). *Spirulina* for snack enrichment: Nutritional, physical and sensory evaluations. *Lebensmittel-Wissenschaft und -Technologie- Food Science and Technology*, 90, 270–276. <https://doi.org/10.1016/j.lwt.2017.12.032>.
- Manohar, R. S., & Rao, P. H. (2002). Interrelationship between rheological characteristics of dough and quality of biscuits; use of elastic recovery of dough to predict biscuit quality. *Food Research International*, 35, 807–813. [https://doi.org/10.1016/S0963-9969\(02\)00083-2](https://doi.org/10.1016/S0963-9969(02)00083-2).
- Manzocco, L., Calligaris, S., Mastrocola, D., Nicoli, M. C., & Lerici, C. R. (2000). Review of non-enzymatic browning and antioxidant capacity in processed foods. *Trends in Food Science & Technology*, 11, 340–346. [https://doi.org/10.1016/S0924-2244\(01\)00014-0](https://doi.org/10.1016/S0924-2244(01)00014-0).
- Marcinkowska-Lesiak, M., Onopiuk, A., Zalewska, M., Cieploch, A., & Barotti, L. (2017). The effect of different level of *Spirulina* powder on the chosen quality parameters of shortbread biscuits. *Journal of Food Processing and Preservation*, 42, 1–10. <https://doi.org/10.1111/jfpp.13561>.
- Mokrzycki, W. S., & Tatol, M. (2011). Color difference ΔE - a survey. *Machine Graphics and Vision*, 20, 383–411.
- Nayak, B., Liu, R. H., & Tang, J. (2015). Effect of processing on phenolic antioxidants of fruits, vegetables, and grains—a review. *Critical Reviews in Food Science and Nutrition*, 55, 887–919. <https://doi.org/10.1080/10408398.2011.654142>.
- Nogueira, A. de C., & Steel, C. J. (2018). Protein enrichment of biscuits: A review. *Food Reviews International*, 34, 796–809. <https://doi.org/10.1080/87559129.2018.1441299>.
- Nooshkam, M., Varidi, M., & Bashash, M. (2019). The Maillard reaction products as food-born antioxidant and antibrowning agents in model and real food systems. *Food Chemistry*, 275, 644–660. <https://doi.org/10.1016/j.foodchem.2018.09.083>.
- Oh, S. H., Ahn, J., Do, H. K., & Lee, H. Y. (2011). The effect of ultrasonicated extracts of *Spirulina maxima* on the anticancer activity. *Marine Biotechnology*, 13, 205–214. <https://doi.org/10.1007/s10126-010-9282-2>.
- Onacik-Gür, S., Zbikowska, A., & Majewska, B. (2018). Effect of *Spirulina* (*Spirulina platensis*) addition on textural and quality properties of cookies. *Italian Journal of Food Science*, 30, 1–12. <https://doi.org/10.14674/IJFS-702>.
- Ou, B., Hampsch-Woodill, M., & Prior, R. L. (2001). Development and validation of an improved oxygen radical absorbance capacity assay using fluorescein as the fluorescent probe. *Journal of Agricultural and Food Chemistry*, 49, 4619–4626. <https://doi.org/10.1021/jf010586o>.
- Pérez, B., Nykvist, H., Brøgger, A. F., Larsen, M. B., & Falkeberg, M. F. (2019). Impact of macronutrients printability and 3D-printer parameters on 3D-food printing: A review. *Food Chemistry*, 287, 249–257. <https://doi.org/10.1016/j.foodchem.2019.02.090>.
- Plaza, M., Herrero, M., Cifuentes, A., & Ibáñez, E. (2009). Innovative natural functional ingredients from microalgae. *Journal of Agricultural and Food Chemistry*, 57, 7159–7170. <https://doi.org/10.1021/jf901070g>.
- Portanguen, S., Tournayre, P., Sicard, J., Astruc, T., & Mirade, P. S. (2019). Toward the design of functional foods and biobased products by 3D printing: A review. *Trends in Food Science & Technology*, 86, 188–198. <https://doi.org/10.1016/j.tifs.2019.02.023>.
- Re, R., Pellegrini, N., Proteggente, A., Pannala, A., Yang, M., et al. (1999). Antioxidant activity applying an improved ABTS radical cation decolorization assay. *Free Radical Biology and Medicine*, 26, 1231–1237. [https://doi.org/10.1016/S0891-5849\(98\)00315-3](https://doi.org/10.1016/S0891-5849(98)00315-3).
- Roberfroid, M. B. (2000). Concepts and strategy of functional food science: The European perspective. *American Journal of Clinical Nutrition*, 71, 1660S–4S. <https://doi.org/10.1093/ajcn/71.6.1660S>.
- Šaponjac, V. T., Četković, G., Čanadanović-Brunet, J., Pajin, B., Djilas, S., et al. (2016). Sour cherry pomace extract encapsulated in whey and soy proteins: Incorporation in cookies. *Food Chemistry*, 207, 27–33. <https://doi.org/10.1016/j.foodchem.2016.03.082>.
- Severini, C., Azzollini, D., Albenzio, M., & Derossi, A. (2018). On printability, quality and nutritional properties of 3D printed cereal based snacks enriched with edible insects. *Food Research International*, 106, 666–676. <https://doi.org/10.1016/j.foodres.2018.01.034>.
- Silva, A. de S., Moreira, L. M., De Magalhães, W. T., Farias, W. R. L., Rocha, M. V. P., & Bastos, A. K. P. (2017). Extraction of biomolecules from *Spirulina platensis* using non-conventional processes and harmless solvents. *Journal of Environmental Chemical Engineering*, 5, 2101–2106. <https://doi.org/10.1016/j.jece.2017.04.008>.
- Singleton, V. L., Orthofer, R., & Lamuela-Raventós, R. M. (1999). Analysis of total phenols and other oxidation substrates and antioxidants by mean of folin-ciocalteu reagent. *Methods in Enzymology*, 299, 152–178. [https://doi.org/10.1016/S0076-6879\(99\)99017-1](https://doi.org/10.1016/S0076-6879(99)99017-1).
- Soni, A. R., Sudhakar, K., & Rana, R. S. (2017). *Spirulina*- from growth to nutritional product: A review. *Trends in Food Science & Technology*, 69, 157–171. <https://doi.org/10.1016/j.tifs.2017.09.010>.
- Sun, J., Zhou, W., Huang, D., Fuh, J. Y. H., & Hong, G. S. (2015). An overview of 3D printing technologies for food fabrication. *Food and Bioprocess Technology*, 8, 1605–1615. <https://doi.org/10.1007/s11947-015-1528-6>.
- Sun, J., Zhou, W., Yan, L., Huang, D., & Lin-ya, L. (2018). Extrusion-based food printing for digitalized food design and nutrition control. *Journal of Food Engineering*, 220, 1–11. <https://doi.org/10.1016/j.jfoodeng.2017.02.028>.
- Syarina, P. N. A., Karthivashan, G., Abas, F., Arulseelan, P., & Fakurazi, S. (2015). Wound healing potential of *Spirulina platensis* extracts on human dermal fibroblast cells. *EXCLI Journal*, 14, 385–393. <https://doi.org/10.17179/excli2014-697>.
- Tan, C., Toh, W. Y., Wong, G., & Li, L. (2018). Extrusion-based 3D food printing - Materials and machines. *International Journal of Bioprinting*, 4(2), 1–13. <https://doi.org/10.18063/IJB.v4i2.143>.
- Voon, S. L., An, J., Wong, G., Zhang, Y., & Chua, C. K. (2019). 3D food printing: A categorised review of inks and their development. *Virtual and Physical Prototyping*, 14, 203–218. <https://doi.org/10.1080/17452759.2019.1603508>.

- Walker, S., Seetharaman, K., & Goldstein, A. (2012). Characterizing physicochemical changes of cookies baked in a commercial oven. *Food Research International*, 48, 249–256. <https://doi.org/10.1016/j.foodres.2012.04.003>.
- Wang, L., Zhang, M., Bhandari, B., & Yang, C. (2018). Investigation on fish surimi gel as promising food material for 3D printing. *Journal of Food Engineering*, 220, 101–108. <https://doi.org/10.1016/j.jfoodeng.2017.02.029>.
- Wardhani, D. H., Vázquez, J. A., & Pandiella, S. S. (2010). Optimisation of antioxidants extraction from soybeans fermented by *Aspergillus oryzae*. *Food Chemistry*, 118, 731–739. <https://doi.org/10.1016/j.foodchem.2009.05.057>.
- Yang, F., Zhang, M., Fang, Z., & Liu, Y. (2019). Impact of processing parameters and post-treatment on the shape accuracy of 3D-printed baking dough. *International Journal of Food Science and Technology*, 54, 68–74. <https://doi.org/10.1111/ijfs.13904>.
- Yang, F., Zhang, M., Prakash, S., & Liu, Y. (2018). Physical properties of 3D printed baking dough as affected by different compositions. *Innovative Food Science & Emerging Technologies*, 49, 202–210. <https://doi.org/10.1016/j.ifset.2018.01.001>.
- Yilmaz, Y., & Toledo, R. (2005). Antioxidant activity of water-soluble Maillard reaction products. *Food Chemistry*, 93, 273–278. <https://doi.org/10.1016/j.foodchem.2004.09.043>.
- Zaid, A. A. A., Hammad, D. M., & Sharaf, E. M. (2015). Antioxidant and anticancer activity of *Spirulina platensis* water extracts. *International Journal of Pharmacology*, 11, 846–851. <https://doi.org/10.3923/ijp.2015.846.851>.
- Zou, T. B., Jia, Q., Li, H. W., Wang, C. X., & Wu, H. F. (2013). Response surface methodology for ultrasound-assisted extraction of astaxanthin from *Haematococcus pluvialis*. *Marine Drugs*, 11, 1644–1655. <https://doi.org/10.3390/md11051644>.