

DEVELOPMENT OF A NOVEL REACTOR FOR HIGH-RATE ANAEROBIC TREATMENT OF LCFA CONTAINING WASTEWATER

M.A. Picavet, A.J. Cavaleiro, M.M. Alves

* IBB – Institute for Biotechnology and Bioengineering, Centre of Biological Engineering, University of Minho, Braga, Portugal

Keywords: LCFA; Reactor; Biogas

High-rate anaerobic technology is an accepted technology for industrial wastewater treatment. More than 2,000 full-scale installations are running worldwide (Van Lier, 2007) and mainly treat wastewaters containing readily degradable organic pollutants such as volatile fatty acids and carbohydrates. Lipids do not belong to this group, since their hydrolysis results in the production of long chain fatty acids (LCFA). Until recently these were considered toxic to anaerobic bacteria and a nuisance because they induce floatation of biomass (Hwu, 1997). Since the success of conventional anaerobic treatment systems is based on optimisation of biomass sedimentation, floatation leads to washout and subsequent process disruption. Therefore, lipids are normally removed from wastewater prior to anaerobic treatment using e.g. dissolved air floatation.

Pereira *et al.* (2002) showed that lipids are not toxic and can be converted to biogas. As to prevent washout induced by LCFA adsorption, a sequential process including at least a feeding and reaction phase was proposed as the preferred technology for anaerobic LCFA removal from wastewater (Pereira *et al.*, 2005). It was further postulated that the specific contact area between bacteria and LCFA should be maximised as to maximise LCFA adsorption and minimise mass transfer limitations. The sequential process was applied at lab scale by Cavaleiro *et al.* (2007). Volumetric loading rates up to 20 kg COD/m³/day were achieved on lab scale with 80% conversion to methane. Furthermore, the feeding phase could be prolonged with every cycle, showing that a continuous process for LCFA treatment should be possible. This resulted in a novel patented reactor concept (Alves *et al.*, 2007) which is currently being tested in our lab and will go to pilot scale at the end of 2007.

From the current problems encountered at industrial scale with LCFA and the research results from Pereira *et al.* (2002-2005) two main principles may be postulated for the design of a reactor capable of high-rate anaerobic treatment of LCFA containing wastewater. These form the base of the proposed reactor concept:

1. Maximise the contact area between biomass and LCFA as to optimize LCFA adsorption, since LCFA adsorption forms the first step in effective LCFA conversion to biogas.
2. Use floatation as the primary biomass retention technique, since LCFA induced floatation is currently the main reason why LCFA are removed prior to anaerobic treatment.

These two principles imply that conventional primary biomass retention techniques such as granulation or biomass fixation cannot be applied. However, a settling step is still needed, because sludge settles well again after effective LCFA conversion. This settled sludge can subsequently be intimately contacted with LCFA containing wastewater as to maximise adsorption. Thus, a sludge recycle loop should be present over the reactor. This loop could further provide the mild shear stress needed to maximise the sludge surface area. Additionally, it provides the means to control mixing intensity inside the reactor and limit possible mass transfer limitations even further. Summarising, an effective reactor would need to provide the following:

1. Primary biomass retention through floatation.
2. Secondary biomass retention through settling.
3. Contact area maximisation using mild shear stress.
4. Mass transfer maximisation by adequately controlling mixing intensity.

- LCFA adsorption induction through intimate contact between influent and recycled settled sludge.

Figure 1 shows a schematical representation of the reactor concept.

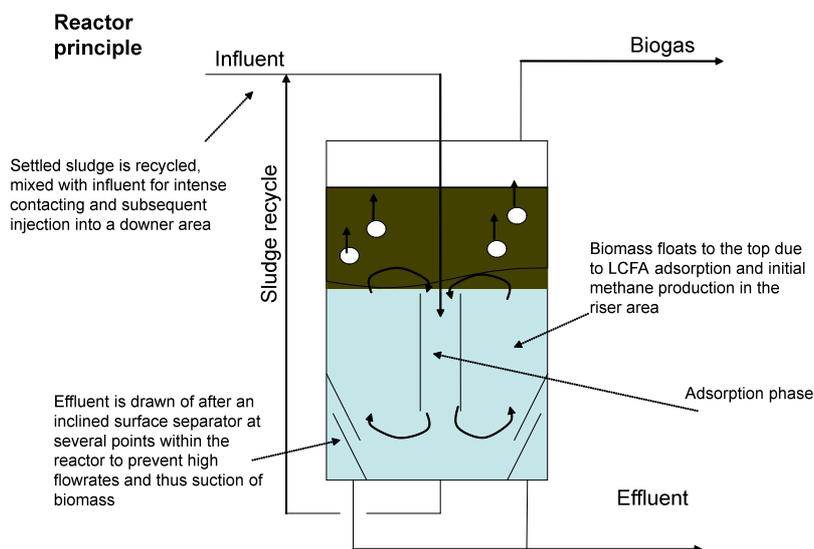


Fig. 1- Reactor concept.

REFERENCES

- Alves, M.M., Picavet, M.A., Pereira, M.A., Cavaleiro, A.J., Sousa, D.Z. (2007) Novel anaerobic reactor for the removal of long chain fatty acids from fat containing wastewater. WO 2007058557
- Cavaleiro, A.J. Alves, J.I., Alves, M.M. (2007) Discontinuous operation promotes efficient continuous anaerobic treatment of effluents with high lipid content. Proceedings of the 11th IWA World Congress on Anaerobic Digestion, 23-27 September 2007, Brisbane, Australia.
- Hwu C.-S. (1997) Enhancing anaerobic treatment of wastewaters containing oleic acid. Ph.D. Thesis, Wageningen Agricultural University, Wageningen, The Netherlands.
- Pereira, M.A., Cavaleiro, A.J., Mota, M., Alves, M.M. (2003) Accumulation of LCFA onto anaerobic sludge under steady state and shock loading conditions: effect on acetogenic and methanogenic activity. *Wat. Sci. Tech.* **48** (6), 33-40.
- Pereira M.A., Sousa D.Z., Mota M., Alves M.M. (2004) Mineralization of LCFA associated to anaerobic sludge: kinetics, transport limitations, enhancement of methanogenic activity and effect of VFA. *Biotechnol Bioeng.* **88**(4), 502-511.
- Pereira M.A., Pires O.C., Mota M., Alves, M.M. (2002) Anaerobic degradation of oleic acid by suspended and granular sludge: identification of palmitate as a key intermediate. *Wat. Sci. Tech.*, **45**, 139-144.
- Pereira, M.A., Pires, O.C., Mota, M., Alves, M.M. (2005) Anaerobic biodegradation of oleic and palmitic acids: evidence of mass transfer limitations caused by the accumulation of LCFA onto the anaerobic sludge. *Biotechnol Bioeng.* **92** (1), 15-23
- Van Lier, J.B. (2007) Current trends in anaerobic digestion; Diversifying from waste(water) treatment to re-source oriented conversion techniques. Proceedings of the 11th IWA World Congress on Anaerobic Digestion, 23-27 September 2007, Brisbane, Australia.