



## Erratum: Alcohol-Aminosilicate Hybrid Coatings for Corrosion Protection of Galvanized Steel in Mortar

[*J. Electrochem. Soc.*, **161**, C349 (2014)]


Rita B. Figueira,<sup>a,b</sup> Carlos J. R. Silva,<sup>b</sup> Elsa V. Pereira,<sup>a</sup> and M. Manuela Salta<sup>a</sup>

<sup>a</sup>LNEC, Laboratório Nacional de Engenharia Civil, Lisboa 1700-066, Portugal

<sup>b</sup>Centro de Química, Universidade do Minho, Campus de Gualtar, Braga 4710-057, Portugal

© 2014 The Electrochemical Society. [DOI: 10.1149/2.0271503jes] All rights reserved. Published December 10, 2014.

On page C356, Figure 9 should be

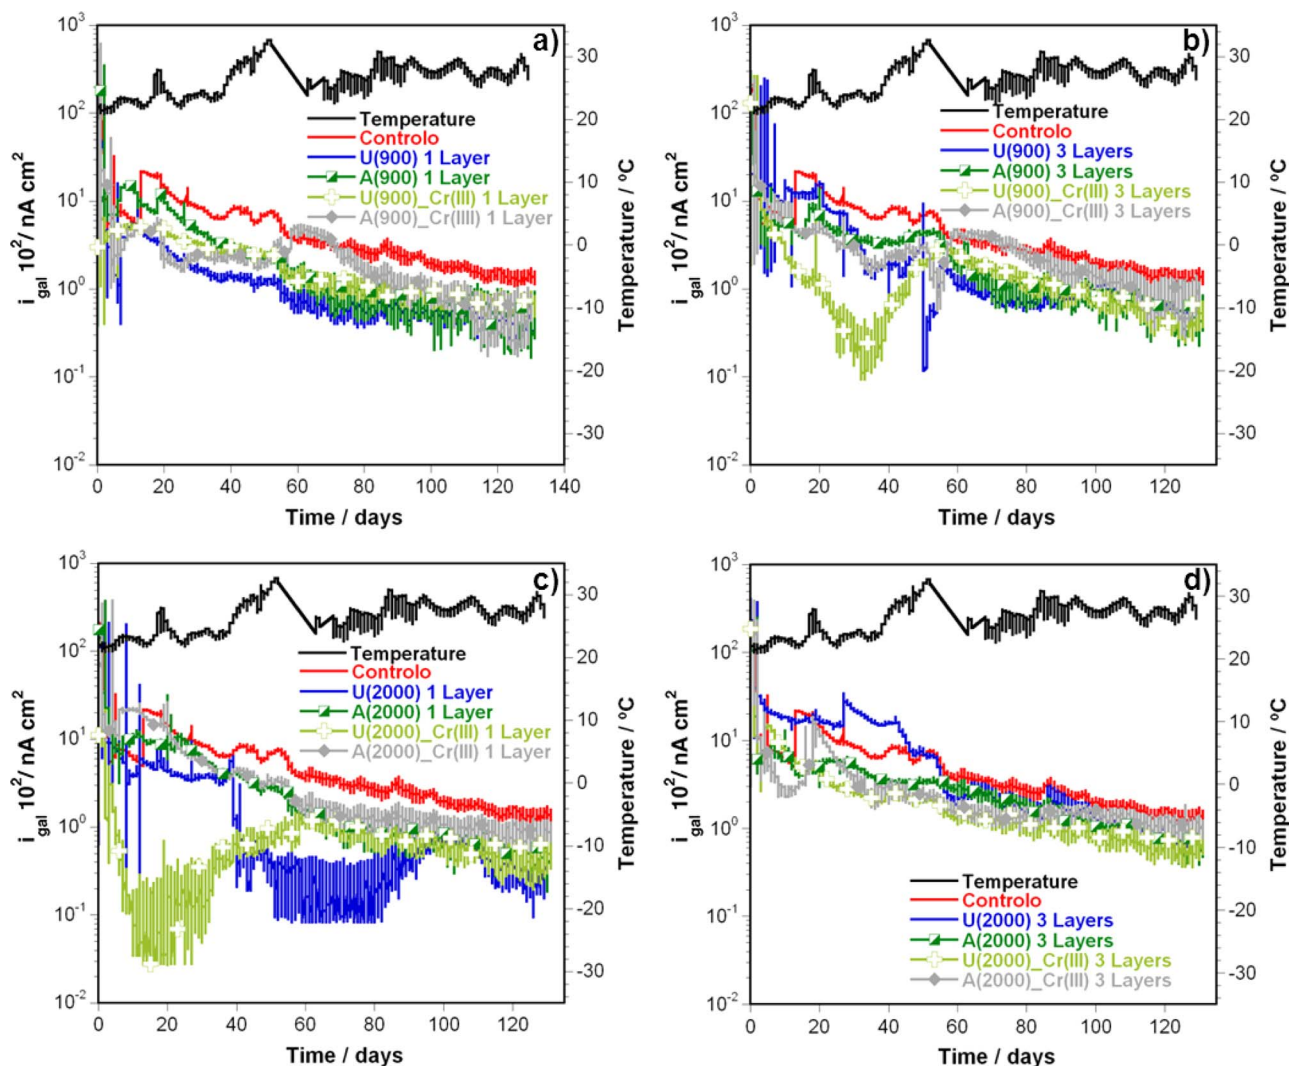

**Figure 9.** Plots of the macrocell current density ( $i_{gal}$ ) variation and laboratory temperature over time recorded for the different coated HDGS sample cells (kept embedded in mortar for 137 days). Displayed graphs correspond to different amino-alcohol-silicate matrices. A(X) samples deposited by: a) one dip step (1 layer); b) three dip steps (3 layers) and A(X)\_Cr(III) samples deposited by: c) one dip step (1 layer); d) three dip steps (3 layers).