

# Emotions Detection on an Ambient Intelligent System Using Wearable Devices

Angelo Costa<sup>b,\*</sup>, Jaime A. Rincon<sup>a</sup>, Carlos Carrascosa<sup>a</sup>, Vicente Julian<sup>a</sup>, Paulo Novais<sup>b</sup>

<sup>a</sup>*D. Sistemas Informáticos y Computación. Universitat Politècnica de València. Valencia (Spain)*

<sup>b</sup>*Centro ALGORITMI, Escola de Engenharia, Universidade do Minho, Braga (Portugal)*

---

## Abstract

This paper presents the Emotional Smart Wristband and its integration with the iGenda. The aim is to detect emotional states of a group of entities through the wristband and send the social emotion value to the iGenda so it may change the home environment and notify the caregivers. This project is advantageous to communities of elderly people, like retirement homes, where a harmonious environment is imperative and where the number of inhabitants keeps increasing. The iGenda serves has the visual interface and the information center, receiving the information from the Emotional Smart Wristband and tries achieve a specific emotion (such as calm or excitement). Thus, the goal is to provide an affective system that directly interacts with humans by discreetly improving their lifestyle. In this paper, it is described the wristband in depth and the data models, and is provided an evaluation of them performed by real individuals and the validation of this evaluation.

*Keywords:* Multi-agent Systems; Emotional Agents; Internet of Things

---

\*Corresponding author

*Email addresses:* [acosta@di.uminho.pt](mailto:acosta@di.uminho.pt) (Angelo Costa), [jrincon@dsic.upv.es](mailto:jrincon@dsic.upv.es) (Jaime A. Rincon), [carrasco@dsic.upv.es](mailto:carrasco@dsic.upv.es) (Carlos Carrascosa), [vinglada@dsic.upv.es](mailto:vinglada@dsic.upv.es) (Vicente Julian), [pjon@di.uminho.pt](mailto:pjon@di.uminho.pt) (Paulo Novais)

## 1. Introduction

Ambient Assisted Living (AAL) is increasing rapidly and a large number of projects are being developed with the aim of providing assistance to elderly and disabled people [1, 2, 3]. What we are able to observe is that most of them have  
5 as a goal to provide a simple interaction with the users with minimal effort as possible. One common issue that most possess is that they rely on automatisms and static user profiles.

While they are effective in terms of simple tasks they do not encompass the ability of cater to changes that are part of the complex human states (like  
10 boredom), which changes the user profile [4].

The modulation of a user profile that emulates one's decision process must have the ability of representing emotional states [4, 5, 6]. The emotional states affect greatly the human decisions, where one decision to a specific situation may vary from one opposite to another if the current emotional state of a person  
15 is happy or sad.

One way to address this issue is to ask every time the user for its consent to every action/decision, which defeats the purpose of being discrete and ubiquitous [6].

Another solution is using an adaptive system that is able to perceive these  
20 emotional changes. The information of these systems can be used to transparently support a decision according to one's emotional response. Moreover, emotional profiles may be created to provide common responses that were expected from the person that was emulated.

To capture the emotional status there are several ways that may be used,  
25 but one of the most discrete way is to monitor human physical changes. The way that humans perceive the world influences their emotional state and that has a repercussion on the physical level [7, 8].

There are signals that the human body inadvertently displays, like skin/muscle  
30 tensioning, pupil dilatation and micro-movements. Most of them have a corresponding bio-electrical impulse, which in turn can be captured by sensors.

In this paper we propose the usage of a wearable device in form of a wristband, named *Emotional Smart Wristband* (ESW) that sends information to the iGenda (an AAL platform), enabling it to schedule new tasks according the emotional status. Furthermore, the ESW plays an important part in Intelligent Virtual  
35 Environments, where the deployment environments can be simulated to test multiple outcomes of real interactions.

We also present in detail the composition of the ESW and the procedures and architecture of translating bio-signals into emotions using the PAD (Pleasure, Arousal, Dominance) concept and neural networks. We then establish the ground  
40 work of the operational part of the system and how can the ESW contribute to other projects through giving real data or simulated scenarios in accordance to the collected data.

The objective is to create a complete AAL platform, using the ESW and the iGenda combined, that is able to cater to its users in a discrete way, and  
45 gather emotional information that enriches the iGenda’s knowledge about the user, such as likes and decisions. Thus, being able to forecast future decisions of these users, being able to implement them in virtual scenarios where they are tested and validated.

### 1.1. *iGenda*

50 iGenda is the base structure for communicating with the users. The aim of the iGenda is to manage the daily activities of the care-receivers and caregivers, using their agendas [9, 10]. The intention is to streamline the interaction and to minimize the intrusion that forced interaction may require. iGenda uses a multi-agent system that connects with the ESW and uses the care-receiver’ emotional  
55 status to schedule/remove activities or events based on the feelings demonstrated, as well as send notifications to the caregivers about abrupt emotional changes. This way we are able to shape the users’ environment as transparently as possible.

The use of the ESW has a motive: understanding how the user feels about the iGenda suggestions. iGenda contains several information about its users  
60 and their responses but the issue is that these interactions may be biased. Our

belief is that detecting the user's emotions we are able to obtain an unbiased response, thus being able to be more true to the users preferences and possibly adapt faster to them. Moreover, there are some extra features that the ESW has that can be used by the iGenda, like detecting heart problems or an heart attack  
65 and reporting the vital signs, which can be used to create health reports for the caregiver. iGenda has been extensively explained in previous articles [11, 9, 10]. Thus, in this paper our aim is to explain the ESW features and architecture, focusing on the interpretation of the emotions and how we translate electrical signals into emotions.

70 The paper is structured as follows: section 2 shows the related projects in the AAL and emotion detection areas; section 3 presents the ESW architecture, the emotional model and the virtual actor concept and the wristband components and operation; section 4 presents the evaluation of the proposed models and hardware with real subjects with the resulting data and its interpretation; finally,  
75 section 5 presents the conclusion and future developments.

## 2. Related work

The AAL area is currently very prolific, as it is object of various developments and novel projects. The AAL domain is very complex (providing healthcare services to elderly and mentally/physically challenged people) and presents an  
80 important social strand that affects a numerous people, thus it is very relevant. AAL proposes systems and platforms that use technological helpers to perform daily tasks on a home environment. These helpers have the role of enhancing the task of the caregivers, providing extra help when the caregivers are not available and constantly monitoring the care-receivers for dangerous situations that they  
85 may encounter.

The Caregiver's Assistant project uses RFID and a database with activities and a fast inference mechanism that allows the identification actions being performed [12]. It uses RFID cards to track the users location and beacons that remotely read them, thus being able to locate accurately each user position. One

90 issue with the hardware is that the beacons have a limited range, requiring that the users are in almost direct contact with them, thus they are very invasive and require effort to work and the users are aware of the procedures.

The CoME project [13] uses wearable sensors to monitor the platform users and smartphones to interact with them and to collect reports from them. Additionally, the platform has tutorials about how to perform certain activities that 95 are showed to the caretakers to localize and access health reports from their assigned users. The platform aimed environment is elderly homes or similar places that care for a community of elderly people. The goal is to optimize the care provided by few caretakers to many care-receivers. Technologically, each 100 deployed system is connected with the rest of the net and shares and receives information from them, adjusting constantly the services provided.

The ALADIN [14] allows the users to control the home environment (lights' brightness and colour) according to their emotional state. The users use a glove that reads biosignals (photoplethysmography), transmitting that information to 105 the server, and according to their pulse/heart-rate the illumination is dimmed or colour changed. The goal of this project is to create comfort and peace by adjusting the environment to the user emotions. The glove limits the user to a confined space and it cannot get wet or be used to manage heavy objects. Thus it is very invasive, possibly biasing the results as the users are aware of 110 apparatus and operation.

Pepper is a result of a private effort from the SoftBank company and is a servant humanoid robot [15]. Its aim is to interact with human beings, reading their emotions to create an empathic connection, and perform light tasks. It was designed to be a social companion, doing tasks like receiving people and provide 115 useful information about a topic or task. The idea behind this robot was to create a companion for elderly people that was able to follow them around their home and proactively interact with them. The robot counts with a powerful processing unit and several sensors. It uses cameras and voice modulation to obtain the emotion status of the person that is interacting. Relying on imprecise sensors 120 (cameras and microphones) means that the robot can only detect 4 emotions on

exceptional environmental conditions (joy, sadness, anger and surprise). Those conditions are hard to achieve, thus, most of the times Pepper is unable to detect the emotions, being unreliable, and most of the time relying in artificial intelligence to show a probable emotion.

125 The works by [16, 17] introduce an architecture for emotion detection in smart environments (medical and residencies). The aim is to provide a system that is able to fusion multiple sources of information (physiological signals, facial expression and behavior) to obtain the emotional state of the monitored users. With this information, the authors propose the regulation of sound (music), color  
130 and light to achieve calm and happy emotions on the users. They have devised a wearable that is able to detect the electro-dermal activity and blood volume, which they measure the tensioning and relaxation of the body. Furthermore, with cameras they capture facial expressions and movement in the environment. With the facial expressions the application is able to capture directly the emotional  
135 state, and to compensate the natural unreliability of this process (that requires appropriate lightning, head position, distance, ...) a ceiling camera is available, to capture the movement of the users, detecting erratic movements and common patterns. The issue with these systems is the scalability problems and the fusion of distinct sensor systems. Albeit the authors use recent methodologies  
140 (like neural networks) to do the heavy lifting, correlating very distinct concepts (physical and psychological) may open the door to a high number of false positives due to the causation effects.

One common problem revealed of these projects is that they are interested in the implementation and the execution of their components but do not reveal  
145 any particular interest on the opinion of the users towards the devices that they are using.

Commonly, most of these projects overlook the opinion and emotions that the users have towards them. They may be liked by the users, and that does not poses a problem, but if they are disliked by the users it is very hard to know that  
150 information to improve them. Furthermore, in terms of personalization there is a reduced number of projects that tackle the perspective of using emotions to

model services and visual interactions.

The recognition of emotions is a relatively easy task for a human: simply listening the nuance in the voice of a person or looking at her face. During  
155 the last few years, different methods for the automatic recognition of emotions  
have been studied. One of the best known techniques is based on the use of  
videos and images [18]. Moreover, the use of Electroencephalography (EEG)  
[19] approaches have provoked very significant improvements. This is because  
they allow direct measurement of the brain. However, we can find other studies  
160 the change in the diameter of the pupil, since this changes are related to human  
cognitive process. This techniques called *Pupillometry* [20] measure the pupil  
diameter when the people is exposed to a different stimuli. The pupillometry is  
used in different aspect as *Language Processing, Memory and Decision Making,*  
*Perception, Cognitive Development and Emotion.*

165 Nevertheless, these two approaches have drawbacks, video image requires a  
high processing load and the EEG has the problem that it is an invasive method.

According to this last consideration, other human parameters have been con-  
sidered lately, like body posture [21] or bio-signals from the body [22]. Regarding  
this last approach, bio-signals are a very interesting field of research to try to  
170 automatically recognize emotions in humans. This is due to the existence of a  
great amount of different signals that can be measured in a human body. These  
signals may range from well-known signals like skin conductance or heart pulse  
rate (also known as Galvanic Skin Response –GSR–) to more complex signals  
like Electromyography (EMG); Electrocardiography (ECG); Electrodermal Ac-  
175 tivity (EDA); Blood Volume Pulse (BVP); Peripheral Temperature (SKT); or  
Respiration (RESP).

Due to the large number of existing bio-signals, one of the problems is the  
selection of the most appropriated bio-signals to be used as a method for the  
transformation of signals into emotions [23]. For the measurement of bio-signals  
180 it is necessary the employment of the appropriated sensors. Sensors allow the  
acquired the physical signals (GSR, PPG, etc) into electrical variables. To do  
this, typically a very simple process transforms the electrical signals, obtained

by the sensor, in a measure based in a physical unit.

Nonetheless, the main problem in this process is the transformation of these  
185 physical units into emotions [24]. A great precision is needed in order to obtain  
good results. Therefore, the hardware of the sensor and the software employed for  
the measurement have an important role to play in the emotion finally detected.  
Current approaches try to place different sensors on complex devices, and this  
way the device can measure from different sensor types and different sensors  
190 sources. Typically, these devices are called smart devices or smart sensors [25].  
These devices also offer services to the rest of the system through some kind  
of connectivity functionality like bluetooth, wi-fi, . . . In this sense, the devices  
are perceived by the rest of the entities of the system as a resource that offers  
services [26].

195 Next it is presented the ESW architecture, that tries to tackle the issues of  
the projects presented in this section.

### 3. Emotional Smart Wristband (ESW)

This section describes the proposed platform which allows the schedule of  
new tasks according to the emotional status of the users. To do this, the platform  
200 is mainly formed by an Emotional Smart Wristband (ESW) and the iGenda  
system [10, 11, 9]. The ESW monitors the Galvanic Skin Response and the  
Photoplethysmogram, and transforms it into an emotion classification.

With this information, the iGenda is able to use it to associate that emotion  
with the suggestions sent to the users. The goal it to synchronize the conscious  
205 decision with the subconscious one and obtain an unbiased classification based  
on the emotional response. The iGenda learning algorithms adjust the data to  
be in accordance to the user likes, improving the future suggestions, evolving  
along with the user. Moreover, iGenda is able to receive the information of  
multiple ESW and process them individually or in group. The reason behind  
210 the group emotion detection is that it is very useful to determine the global  
emotion status of an environment that is populated by multiple people, like a



nursing home.

AAI promotes the individual as the most important element in the system, but that is applicable only when it is considered only one individual, which is not always the case. For instance, when we consider multiple individuals (like  
215 in nursing homes) we find that the best way to obtain a harmonious ambient is when most of the people tend to an overall emotion (considering varying degrees). The people in nursing homes behave socially, so there are natural forming groups with leaders and followers roles [27], thus the group is influenced  
220 by the leader decision even if the people individually do not like/agree with that decision. Tracking the groups emotional state is useful to understand the social bound between the users and to extract the real emotional response of each user even when influenced by the group. Thus, avoiding a very biased set of activities that the leader enjoys and the rest only tolerates. By using the ESW the users  
225 can respond unbiased of what their feelings are towards an activity. Tracking the community responses results in the overall likeness and in the social aspect identify if the leader is a good one or not.

### *3.1. Architecture*

The ESW platform is mainly composed of a set of smart wristbands which  
230 monitor the emotional state of a set of people and transmit the information to the iGenda platform (see Figure 1). Moreover the ESW platform includes special agents that calculate the group emotion (or Social Emotion) of the participants, the Social Emotion Agent (SEtA), and resorting to machine learning techniques and makes it available for consumption [28, 29]. Moreover, the platform also  
235 includes an Intelligent Virtual Environment, where the deployment environments can be simulated through the employment of virtual actors.

The voltage outputted from the sensors is captured locally (in the wristband) and pre-processed there, thus the information fed to the agents is already a high-level one. Additionally, the multi-agent system has dedicated agents that  
240 grab that information and verify against the adopted models to extract the current emotion, joining it to the rest of the agents community that represent

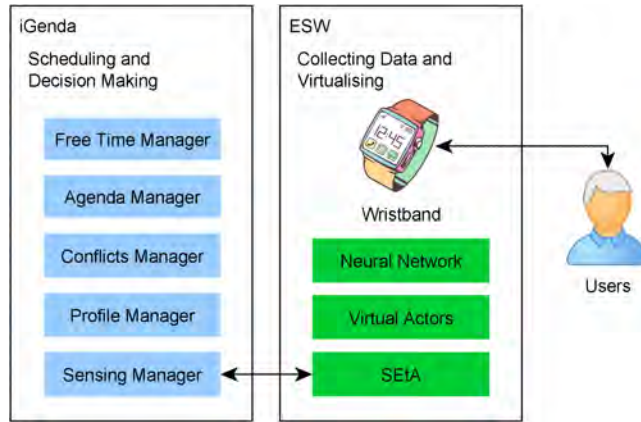


Figure 1: Integration between the ESW and the iGenda platforms.

other users. The overarching result is the availability of the immediate emotion of each user and the global emotion of all users and the emotional trends and evolution. The trend of the group emotion is important as it is easier to find  
 245 the culprits of the emotional changes.

For instance, consider a bar, it contains a group of friends and has music playing. Now consider that some of these friends have different musical tastes. If a music is playing that is enjoyable to 90% of the group we are able to notice an emotional progression towards "satisfied", while if it is the opposite (90% dislikes)  
 250 we can observe movement in the opposite direction. One of the possible aim of this analysis is obtaining a playlist that is enjoyable to most of the group with a specific alignment of songs that cater to each individual like. This specificity is used to avoid reaching a tension point where one or more persons have reached a saturation point and refuse any further change or abandon the environment.

The task of the iGenda is to consume this information and use its scheduling features to change the events of each participant, based on his/her profile, to achieve a specific emotion, thus guiding the group to a common emotional state. The emotional states are measured and placed in the PAD [30, 31] model, outputting a representation of the emotional state, easing the task of the iGenda  
 255 on choosing new events. We have adopted the PAD model due to the simplicity  
 260

and the datasets available. Furthermore, we are able to project the information captured into a 3D space, which facilitates the way the information is perceived.

### 3.2. Background on physiology signals

The signals exposed in this section are used by the wristband to detect human emotions, however we acquired an ECG signal to correlate the PPG signal. This correlation allows us to know if the peak of the ECG (complex QRS) was equal to that detected by the wristband (using PPG). However, another technique used is the Blood Volume Pulse (BVP). The BVP signals is derived of a PPG and is obtained using the PPG, the BVP measures the changes in blood volume in arteries and capillaries by shining an infrared light (a light-emitting diode) through the tissues. The infrared light reflected is capture for the PPG sensor's photodetector and is proportional to the volume of blood in the tissue.

Figure 2 shows three signals: (i) the blue signal corresponding to the GSR measure; (ii) the green signal corresponding to the ECG signal; and (iii) corresponding to the PPG signal. It is important to take into account that all the signal was acquired without any kind of filtering.

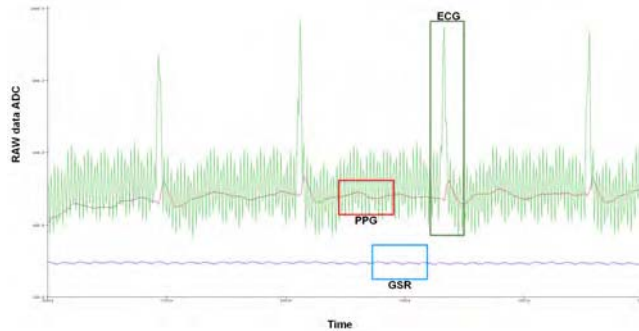


Figure 2: Bio-Signals.

### 3.3. The PAD model

The model seen in Figure 3 is a granular visual representation of the PAD model where the *Valence* replaces the *Pleasure* as in the psychological area is

280 more representative and has a larger range of values [32]. The model has 12 sub-quadrants that are 30 degrees from each other. The emotion is represented by the vector  $\vec{E}(Ag) = [Arousal, Valence]$  and the representation of emotions uses polar coordinates, constituted by the angle and the magnitude of the vector.

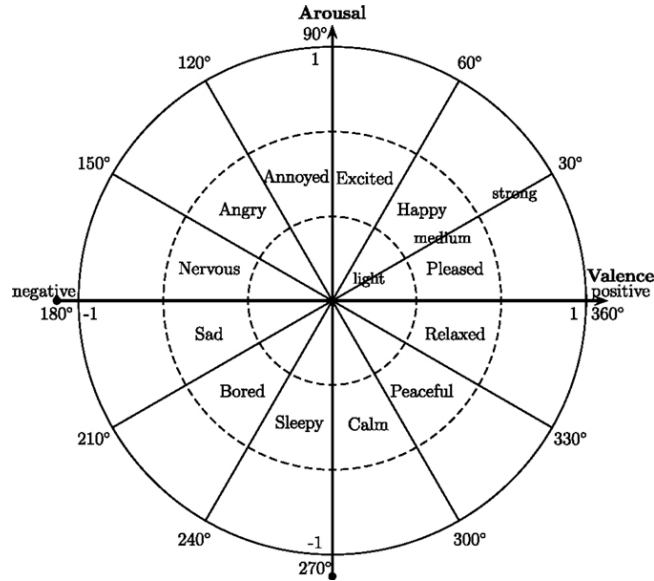


Figure 3: Emotions circle [33].

We use a fuzzy logic process that transforms qualitative values to quantitative values that are able to be placed in the model showed in Figure 3. Thereon, a neural network is trained using the DEAPdataset<sup>1</sup> to achieve a real-world result from real humans. The correlation between the data captured and the dataset is established in the neural network, meaning that each processed electrical input can be translated into an emotion.

### 290 3.4. Virtual Actors

A new development is the inclusion of virtual actors in the system that emulate the real participants. This feature aims to enhance the decision-making

<sup>1</sup><http://www.eecs.qmul.ac.uk/mmv/datasets/deap/>

process of the system, detecting in advance the possible emotional states and preparing changes to the participants surrounding environment to accommodate  
295 these changes and proactively shift them to other states if the expected state is not desirable [34, 35].

In this case specifically, when related to the elderly there is little margin for experimentation, as they have a large number of conditionings and are very fragile. The emotional profile helps to preview the possible reactions to  
300 changes on their daily routines and their daily emotion when performing specific activities. The group emotion is very useful in environments like nursing homes and residential elderly communities. In this type of environment is very common to perform group activities and to generate teams of elderly people. One common issue is the user verbal response and the real feeling, e.g., a person may tell that  
305 they are enjoying an activity but that be only a "kind" response due to peer pressure or to social engagement with the caregivers [36, 37]. If the caregiver is able to receive unbiased information about how one feels about an activity it is easier to schedule similar or different activities or group that person with other people [38].

310 Another benefit from using virtual actors is the possibility of introducing Intelligent Virtual Environments (IVE). In this specific case, the IVE's would be used to project the environments where the users reside and to simulate all of the possible components, meaning that every sensor/actuator is mapped as an agent, thus it is able to directly interact with the human agents. This forwards  
315 our research by having safe environment enabled to test multiple outcomes of real interactions in fractions of second and project the optimal actions to achieve a certain outcome.

### *3.5. Wristband Description*

This section describes the main aspects of the proposed Emotional Smart  
320 Wristband. With the introduction of wearable devices in recent years in our society, a growing boom has begun in the design of smart bracelets. This is mainly due to the reduction of the size and manufacturing costs of the electronic

components. Thanks to this, in recent years we have been able to observe intelligent bracelets that measure our oxygen saturation (SPO2), pulsations per  
325 minute and monitor the way we sleep. However, it is possible to use these new technologies in order to detect our emotional states. This detection is performed using biosignals, such as those measured so far by commercial bracelets. However, it is necessary to add more signals, in order to obtain better detection and classification of emotions. Previous studies [39] demonstrated that variations in  
330 skin resistance could be associated with stress levels in humans. Other studies [5],[40] also shown that the heartbeat and body temperature could be associated with emotional changes. Based on these studies, we have designed a bracelet able to capture and process biosignals, with the aim of detecting emotional states and thus creating applications in IoT and AAL areas. The proposed bracelet  
335 incorporates four sensors, with which four basic emotions are detected in the circumplex model [41] (Happy, Angry, Sad and Relaxed). To detect emotional states present in the circumplex model, the designed wristband incorporates the following sensors:

- Electro Dermal Activity (EDA) (see Figure 4a), allows us to measure the  
340 changes in the electrical conductance of the skin. This includes physical changes that have been called Galvanic Skin Responses (GSR), which result from sympathetic neuronal activity. EDA is a sensitive psychophysiological index of changes in autonomic sympathetic excitation which is integrated for the detection of the emotional and cognitive states [42].
- Photoplethysmography sensor (see Figure 4b), which allows us to measure  
345 the volume as a result of variations in blood flow. Using these variations it is possible to obtain the pulsations per minute, which have been used in the detection of stress levels [43].
- Inertial Measurement Unit (IMU) (see Figure 4c), which consists of an ac-  
350 celerometer and a gyroscope. The accelerometer measures the acceleration of the wrist in the three axes [X, Y, Z]. On the other hand, the gyroscope

allows us to measure the angles of rotation of the wrist, as well as, the angular speed.

- Temperature sensor (see Figure 4d), which varies according to our moods. This temperature sensor measures the irradiated temperature as infrared light that our body emits.
- Bluno Ble V1.0<sup>2</sup> (see Figure 4e), Is a device with bluetooth communication of low consumption or Ble. You have an 8-bit Atmega328 microcontroller. The bluetooth communication chip is compatible with Android System 4.3+ devices with BLE4.0 and iOS 7.0+ devices. This makes it special when it comes to making wearable applications.

In order to integrate these sensors into a wristband, several designs were made to improve the position of the sensors and minimize the size, leaving the final ESW prototype as can be seen in Figure 5. The IMU is the accelerometer and gyroscope and the microcontroller contains the data processing unit. Under these boards is the rest of the sensors.

According to the final proposed design, a screenshot of the wristband customization interface is shown in Figure 6.

The information acquired from these sensors allows us to determine the emotional state of an individual. However, not all humans respond in the same way to external stimuli. For this reason, it is necessary to customize the bracelet. This personalization will help to reliably detect the emotional state of each person who uses it. To perform this customization, an experiment has been designed in which the user will be subjected to a series of visual stimuli (images). In each of the sessions, users will wear the bracelet that continuously capture the physiological variations produced by the images. Also, the user will be monitored through a webcam, which performs a facial analysis of their facial response to the stimuli. Through this facial response, we get the emotion expressed by the users about the images.

---

<sup>2</sup><https://www.dfrobot.com/>

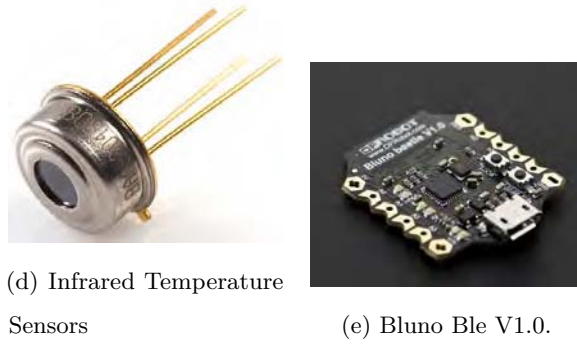
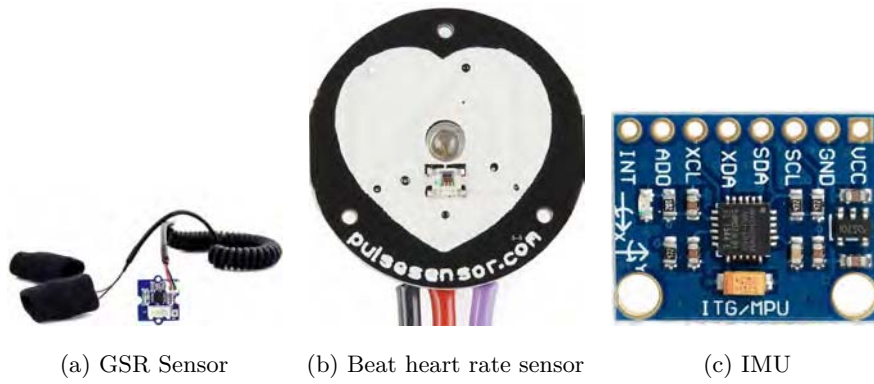


Figure 4: Sensors used to acquire the different biosignals.

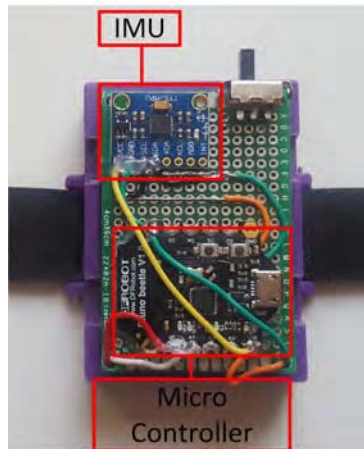


Figure 5: ESW final prototype.



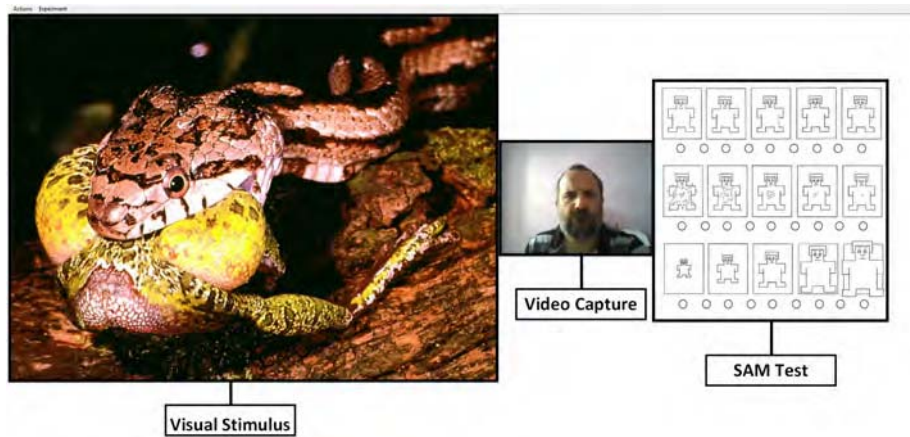


Figure 6: Graphical interface for the personalization of the Wristband.

380 The images used to stimulate emotional changes have been obtained from the  
*Center for the Study of Emotion and Attentions* of the University of Florida<sup>3</sup> [44].  
 This center has created a database formed by a series of images, sounds and texts,  
 previously cataloged. In our experiments, we used the International Affective  
 Imaging System (IAPS). This system has been developed to provide a set of  
 385 normative emotional stimuli for experimental research on emotion and attention.  
 In this dataset there is a large set of standardized, emotionally evocative and  
 internationally accessible color photographs, including contents across a wide  
 range of semantic categories. In the process of personalizing the bracelet, the  
 user is only exposed to these visual stimuli (images). The information obtained  
 390 as a result of the exposure of these stimuli is stored in a database. This database  
 is structured as follows: [ID\_image, Emotion\_Detected, Bio\_Signals, SAM].

The first field is the identifier of the image of the IAPS database, this will  
 allow us to know the emotion that represents that image or sound. The second  
 field is the emotion detected through the camera, this detection is done through

<sup>3</sup><http://csea.php.ufl.edu/index.html>

395 the Microsoft <sup>4</sup> API. This API classifies human emotions in eight classes: Anger, Contempt, Disgust, Fear, Happiness, Neutral, Sadness and Surprise. The third field is an array of ten dimensions, six of which are of the IMU and the remaining three correspond to the biosignals acquired by the wristband. These biosignals will be captured for 20 seconds, during this time the user look at the pictures. 400 In our tests we use 644 images to create the training dataset and 538 images to do the test. Once has been finished the time, the user will perform a Self-Assessment Manikin (SAM) [45] test (see Figure 7), which corresponds to the last field in our database. SAM is a non-verbal pictographic evaluation technique that directly measures the pleasure, excitement and dominance associated with 405 a person’s affective reaction to a wide variety of stimuli. It is important to take into account that the images don’t represent an emotion and the value of PAD is extracted of SAM test. The emotion detected using the Microsoft cognitive service is used to do a correlation with the emotion extracted with the SAM test and the emotion detected.

410 In summary, for each obtained signal, a vector which includes the values of the previously presented equations is formed. Once the data has been obtained for each of the users, a customized emotion classification model is trained. To perform this training, the techniques of descriptive statistics have been adopted, as suggested by Picard et al [46] to perform the extraction of characteristic 415 vectors. For our experiments we have extracted the six following characteristics:

1. the means of the raw signals
2. the standard deviations of the raw signals
3. the means of the absolute values of the first differences of the raw signals
4. the means of the absolute values of the first differences of the normalized 420 signals
5. the means of the absolute values of the second differences of the raw signals
6. the means of the absolute values of the second differences of the normalized signals

---

<sup>4</sup><https://www.microsoft.com/cognitive-services/en-us/emotion-api>

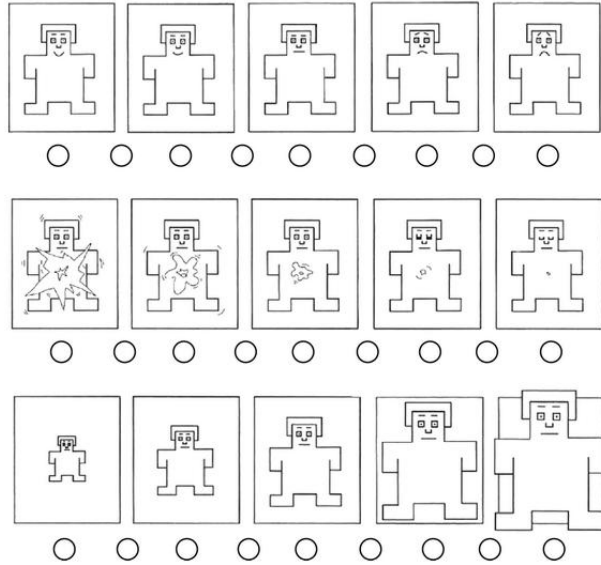


Figure 7: Self-Assessment Manikin (SAM) test.

Each feature vector has 18 elements because six features are extracted for  
 425 each signal. This vector of characteristics is used by a neural network in order to classify the different emotional states of each test subject. There are different methods to perform this classification, but perhaps the most used is neural networks. In our experiments, we have used the *Background Propagation* architecture. Our neuronal network consists of 18 input neurons, 100 neurons  
 430 in the middle layer and 7 neurons in the output layer (one for each emotion: Angry, Disgusted, Fearful, Happy, Sad, Surprised, and Neutral) (see Figure 8). In order to obtain the best results, different experiments were performed leading to improve the number of neurons in the middle layer. After several iterations, it was concluded that with 100 neurons in the middle layer were enough. These  
 435 100 neurons allowed us to obtain the best results when classifying the emotions.

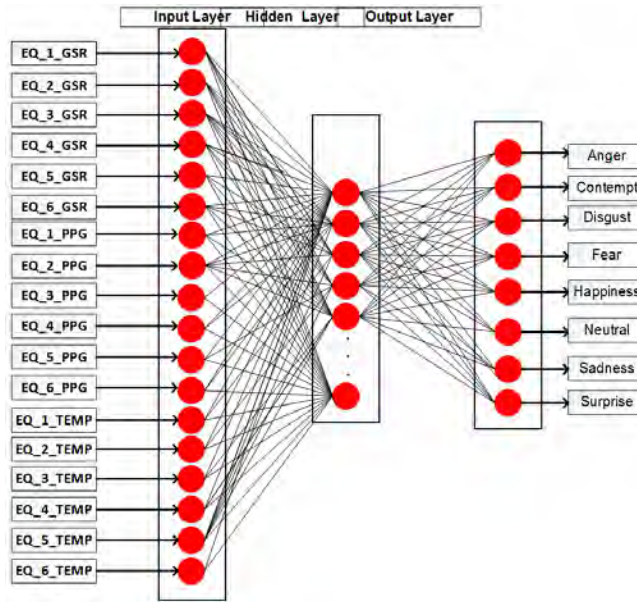


Figure 8: Neural network architecture.

#### 4. Evaluation

Experiments were performed to 20 test subjects, using a database with 1182 images. This database was divided into two sets: the training set, formed by 900 images, and the test set that consists of 282 images.

440 The tests were done using the following protocol (see Figure 9):

1. The set of training images was observed by the test subjects for 10 seconds. During these 10 seconds the signals of GSR, PPG, temperature and heart rate were captured and stored.
2. At the same time, an image was captured, which it was used to detect the emotion expressed by the subject with the stimulus. This detection was performed using the Microsoft Detect Emotions Service, which detects the following emotions: Anger, Contempt, Disgust, Fear, Happiness, Neutral, Sadness and Surprise.
3. After 10 seconds of observation of the stimulus, the subject has 10 seconds

445

more to respond to the SAM test.


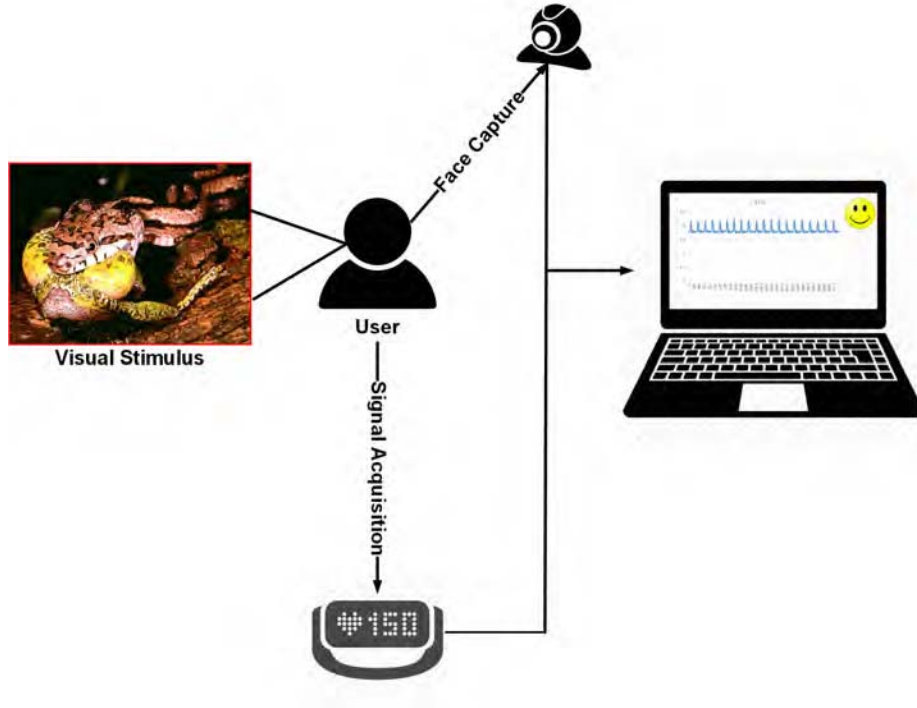



Figure 9: Description of the data capture process.

Figure 10 shows the signals captured by the wristband, these signals are related to the experiments and represent the signals acquired when the user is exposed to the stimulus. It is important to note that the units of the signals are the same:  $mV / time$ . In the case of the temperature-  
 455 *to-voltage* conversion was performed in order to have the three signals with the same unit. This conversion was performed using Equation 1, which is given by the manufacturer of the sensor. In the equation,  $V_{ir}$  is the raw data of the IR channels,  $T_o$  is the temperature of the object,  $T_a$  is the ambient temperature and  $A$  is the general sensitivity.


$$V_{ir} = A (T_o^4 - T_a^4) \quad (1)$$

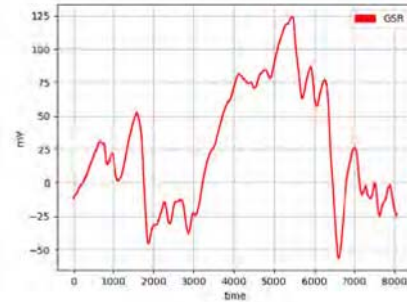

(a) GSR Signal.

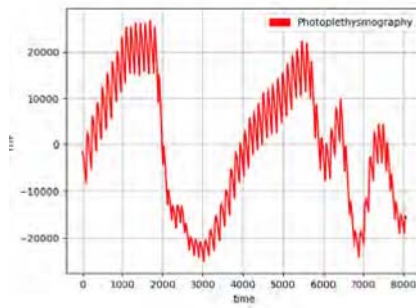

(b) Photoplethysmography Signal.

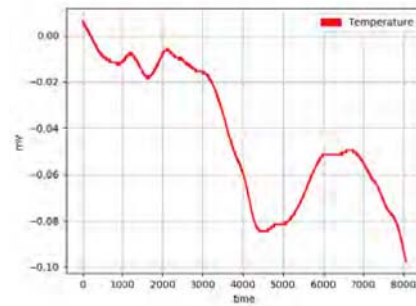

(c) Temperature Signal

Figure 10: Signals captured by the wristband.

460 As described in the previous section, the architecture of the neural network is background propagation. This neural network was trained using 18 feature vectors. However, our dataset has two outputs the first one corresponding to

Table 1: Testing different configuration parameter for the neural network.


	Medium layer activation function	Output layer activation function	Momentum	Learning Rate
Test Subject 1-5	TanhLayer	SoftmaxLayer	0.1	0.1
Test Subject 6-10	SoftmaxLayer	TanhLayer	0.01	0.01
Test Subject 11-15	LSTMLayer	SoftmaxLayer	0.1	0.0001
Test Subject 16-20	LSTMLayer	LinearLayer	0.00001	0.1

the emotion detected for the Microsoft cognitive service and the second one is the emotion obtained using the SAM test. The output using to supervise the neural network training is the result obtained through the cognitive service of Microsoft, the SAM test give us a qualitative emotion associated to the image.


In order to determine the best ANN architecture, the group of 20 subjects was divided into 4 groups of 5 subjects. Each network (corresponding to a group) was modified as the activation function of the middle layer and the output layer. In the same way, the *momentum* and *learning rate* was modified. Table 1 describes the groups and their parameters.

Some of the mean square errors obtained in the experiments (see Figures 11a, 11b, 11c, 11d), allowed us to determine what could be the best neural network architecture to use. It is necessary to emphasize that it is possible to have many combinations of architectures and factors that affect the learning of the neural network. Based on the graphs and classification positions obtained in each experiment, it was determined that the best architectures were those of subjects *Subject 6-10 and Subject 11-15*. However, it is important to clarify that there may be many combinations in this type of experiments. It is for this reason that, in a future work, the test subjects are given a personality test in order to group the subjects by personality similarity and, in this way, to be able to assign a neural network architecture according to their personalities.


After the evaluation process, we have obtained a model that allows us to estimate the emotional state of the wristband’s users with a very low error. This error is related directly with the emotion prediction using the wristband and in our experiments we have achieved 20% of bad classification. The integration of this ESW response in the proposed platform will allow to manage the community

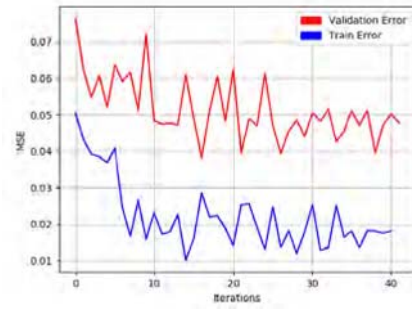


(a) MSE Test Subject 1-5.

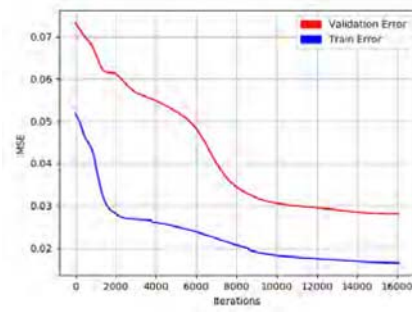

(b) MSE Test Subject 6-10.

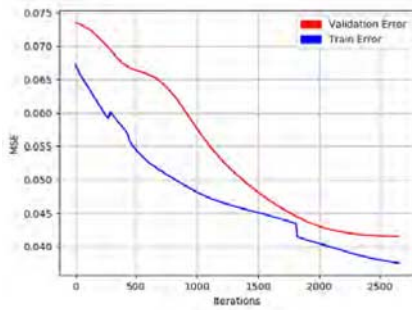

(c) Test Subject 11-15

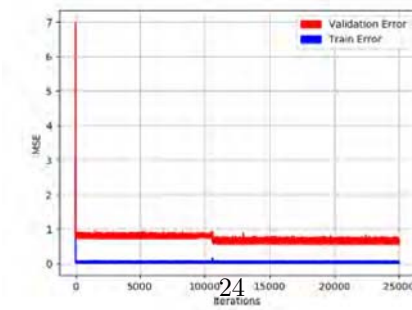

(d) Test Subject 16-20

Figure 11: Signals captured by the wristband.



emotion of a set of users (for instance, people in retirement homes) and to send this information to the care-receivers or caregivers through the iGenda system. 490 Moreover, the trained model allows designers to emulate real participants including their emotional states using a simulation of the environment with virtual actors.

## 5. Conclusions

This paper has presented a new Emotional Smart Wristband (ESW) platform 495 that allows to capture and communicate time-stamped bio-signals from a user to be traduced to the current emotion he feels.

The goal of this platform is twofold: first, it has been designed to be integrated in the iGenda platform, to be used to adjust iGenda platform decisions to changes in the emotions not only of one agent, but of a group (as the platform 500 allows to work with the concept of Social Emotion). The other goal is that capturing the emotions of a user, and having adjusted the response of such user to different stimuli to have a proper ESW response, allows also to model this user to be simulated, and include such model in a virtual actor to be used in an intelligent virtual environment simulation.

505 This will allow to prepare settings of tasks and environmental conditions to be used in the iGenda system and test it with the people it is addressed but without not bothering them with a lot of changes or avoiding them changes that would lead to distasteful experiences that carry them far from the goal emotion (that normally would be a happy social emotion).

510 Only the settings carrying the simulation to the goal emotion would be carried out in the iGenda system interacting with the real world.

One of the strengths of this platform is the usage of a recommender process (through the iGenda) that helps an often forgotten population. Most of the projects are not directly aimed at the general population. Furthermore, the 515 platform counts with discreet sensing systems, as well as more invasive systems for increased accuracy, although with a properly trained model we are able to

use just the wristband, being very unobtrusive.

The modularity that this platform has is also an interesting strength, being possible several different applications to the ESW ecosystem apart from the healthcare area, like: crowd control, visual interfaces management, stress and fatigue monitoring, virtual environments societies, among others.

## 6. Acknowledgements

This work is partially supported by the MINECO/FEDER TIN2015-65515-C4-1-R and the FPI grant AP2013-01276 awarded to Jaime-Andres Rincon. This work is supported by COMPETE: POCI-01-0145-FEDER-007043 and FCT - Fundação para a Ciência e Tecnologia within the projects UID/CEC/00319/2013 and Post-Doc scholarship SFRH/BPD/102696/2014 (A. Costa)

## References

- [1] J. Bravo, D. Cook, G. Riva, Ambient intelligence for health environments, *Journal of Biomedical Informatics* 64 (2016) 207–210. doi:10.1016/j.jbi.2016.10.009.
- [2] C. Ramos, Ambient Intelligence – A State of the Art from Artificial Intelligence Perspective, in: J. Neves, M. F. Santos, J. M. Machado (Eds.), *Progress in Artificial Intelligence*, Vol. 4874 of *Lecture Notes in Computer Science*, Springer Berlin Heidelberg, Berlin, Heidelberg, 2007, pp. 285–295. doi:10.1007/978-3-540-77002-2\_{ }24.
- [3] D. J. Cook, J. C. Augusto, V. R. Jakkula, Ambient intelligence: Technologies, applications, and opportunities, *Pervasive and Mobile Computing* 5 (4) (2009) 277–298. doi:10.1016/j.pmcj.2009.04.001.
- [4] J. Gratch, S. Marsella, Tears and fears, in: *Proceedings of the fifth international conference on Autonomous agents - AGENTS'01*, Association for Computing Machinery (ACM), 2001. doi:10.1145/375735.376309.

- [5] C. Maaoui, a. Pruski, Emotion recognition through physiological signals for human-machine communication, *Cutting Edge Robotics* (2010) 317–333doi:10.5772/10312. 545
- [6] J. van Hoof, H. Kort, P. Rutten, M. Duijnste, Ageing-in-place with the use of ambient intelligence technology: Perspectives of older users, *International Journal of Medical Informatics* 80 (5) (2011) 310–331. doi:10.1016/j.ijmedinf.2011.02.010.
- [7] S. Jerritta, M. Murugappan, R. Nagarajan, K. Wan, Physiological signals based human emotion recognition: a review, in: *2011 IEEE 7th International Colloquium on Signal Processing and its Applications*, IEEE, 2011. doi:10.1109/cspa.2011.5759912. 550
- [8] J. Wagner, J. Kim, E. Andre, From physiological signals to emotions: Implementing and comparing selected methods for feature extraction and classification, in: *2005 IEEE International Conference on Multimedia and Expo*, IEEE. doi:10.1109/icme.2005.1521579. 555
- [9] A. Costa, V. Julián, P. Novais, Advances and trends for the development of ambient-assisted living platforms, *Expert Systems* (2016) n/a–n/aEXSY-Mar-15-075.R1. doi:10.1111/exsy.12163. 560
- [10] J. A. Rincon, A. Costa, P. Novais, V. Julián, C. Carrascosa, A dynamic emotional model for agent societies, in: Y. Demazeau, T. Ito, J. Bajo, M. J. Escalona (Eds.), *Advances in Practical Applications of Scalable Multi-agent Systems. The PAAMS Collection: 14th International Conference, PAAMS 2016, Sevilla, Spain, June 1-3, 2016, Proceedings*, Vol. 9662, Springer International Publishing, 2016, pp. 169–182. doi:10.1007/978-3-319-39324-7\_15. 565
- [11] A. Costa, P. Novais, R. Simoes, A caregiver support platform within the scope of an ambient assisted living ecosystem., *Sensors* (Basel, Switzerland) 14 (3) (2014) 5654–5676. doi:10.3390/s140305654. 570

- [12] K. P. Fishkin, B. Jiang, M. Philipose, S. Roy, I sense a disturbance in the force: Unobtrusive detection of interactions with RFID-tagged objects, in: UbiComp 2004: Ubiquitous Computing, Springer Berlin Heidelberg, 2004, pp. 268–282. doi:10.1007/978-3-540-30119-6\_16.
- 575 [13] Come, accessed on 2017-04-07 (2017).  
URL <http://come-aal.eu>
- [14] E. Maier, G. Kempter, ALADIN - a magic lamp for the elderly?, in: Handbook of Ambient Intelligence and Smart Environments, Springer Berlin Heidelberg, 2010, pp. 1201–1227. doi:10.1007/978-0-387-93808-0\_44.
- 580 [15] Pepper - softbank (2017).  
URL <https://www.ald.softbankrobotics.com/en/robots/pepper>
- [16] A. Fernández-Caballero, A. Martínez-Rodrigo, J. M. Pastor, J. C. Castillo, E. Lozano-Monazor, M. T. López, R. Zangróniz, J. M. Latorre, A. Fernández-Sotos, Smart environment architecture for emotion detection and regulation, Journal of Biomedical Informatics 64 (Supplement C)  
585 (2016) 55 – 73. doi:<https://doi.org/10.1016/j.jbi.2016.09.015>.  
URL <http://www.sciencedirect.com/science/article/pii/S1532046416301289>
- [17] J. C. Castillo, Á. Castro-González, A. Fernández-Caballero, J. M. Latorre,  
590 J. M. Pastor, A. Fernández-Sotos, M. A. Salichs, Software architecture for smart emotion recognition and regulation of the ageing adult, Cognitive Computation 8 (2) (2016) 357–367. doi:10.1007/s12559-016-9383-y.  
URL <https://doi.org/10.1007/s12559-016-9383-y>
- [18] Y. Sun, N. Sebe, M. S. Lew, T. Gevers, Authentic emotion detection  
595 in real-time video, in: Human Computer Interaction, European Conference on Computer Vision, Springer, 2004, pp. 94–104. doi:10.1007/978-3-540-24837-8\_{\\_}10.

- [19] Y. Liu, O. Sourina, M. K. Nguyen, Real-time EEG-based Emotion Recognition and its Applications, in: Transactions on Computational Science XII, Vol. 6670, Springer, 2011, pp. 256–277. doi:10.1007/978-3-642-22336-5.
- [20] S. Sirois, J. Brisson, Pupillometry, Wiley Interdisciplinary Reviews.
- [21] M. Coulson, Attributing emotion to static body postures: Recognition accuracy, confusions, and viewpoint dependence, Journal of nonverbal behavior 28 (2) (2004) 117–139.
- [22] F. Canento, A. Fred, H. Silva, H. Gamboa, A. Lourenço, Multimodal biosignal sensor data handling for emotion recognition, in: Sensors, 2011 IEEE, IEEE, 2011, pp. 647–650.
- [23] J. Kim, E. André, Fusion of multichannel biosignals towards automatic emotion recognition, in: Multisensor Fusion and Integration for Intelligent Systems, Springer, 2009, pp. 55–68.
- [24] A. Haag, S. Goronzy, P. Schaich, J. Williams, Emotion recognition using bio-sensors: First steps towards an automatic system, in: ADS, Springer, 2004, pp. 36–48.
- [25] G. C. M. Meijer, C. M. Meijer, C. M. Meijer, Smart sensor systems, Wiley Online Library, 2008.
- [26] E. Munera, J.-L. Poza-Lujan, J.-L. Posadas-Yagüe, J.-E. Simó-Ten, J. F. B. Noguera, Dynamic Reconfiguration of a RGBD Sensor Based on QoS and QoC Requirements in Distributed Systems, Sensors 15 (8) (2015) 18080–18101.
- [27] P. A. Estabrooks, K. J. Munroe, E. H. Fox, N. C. Gyurcsik, J. L. Hill, R. Lyon, S. Rosenkranz, V. R. Shannon, Leadership in physical activity groups for older adults: A qualitative analysis, Journal of Aging and Physical Activity 12 (3) (2004) 232–245. doi:10.1123/japa.12.3.232.

- [28] J. A. Rincon, V. Julián, C. Carrascosa, Representing social emotions in MAS, in: Y. Demazeau, K. S. Decker, J. B. Pérez, F. de la Prieta (Eds.), Advances in Practical Applications of Agents, Multi-Agent Systems, and Sustainability: The PAAMS Collection - 13th International Conference, PAAMS 2015, Salamanca, Spain, June 3-4, 2015, Proceedings, Vol. 9086 of Lecture Notes in Computer Science, Springer, 2015, pp. 308–311. doi: 10.1007/978-3-319-18944-4\_34.
- [29] J. A. Rincon, V. Julián, C. Carrascosa, An emotional-based hybrid application for human-agent societies, in: Á. Herrero, J. Sedano, B. Baruque, H. Quintián, E. Corchado (Eds.), 10th International Conference on Soft Computing Models in Industrial and Environmental Applications, SOCO 2015, Burgos, Spain, June 2015, Vol. 368 of Advances in Intelligent Systems and Computing, Springer, 2015, pp. 203–213. doi:10.1007/978-3-319-19719-7\_18.
- [30] A. Mehrabian, Analysis of affiliation-related traits in terms of the PAD temperament model, *The Journal of Psychology* 131 (1) (1997) 101–117. doi:10.1080/00223989709603508.
- [31] A. Nanty, R. Gelin, Fuzzy controlled PAD emotional state of a NAO robot, in: 2013 Conference on Technologies and Applications of Artificial Intelligence, Institute of Electrical and Electronics Engineers (IEEE), 2013. doi:10.1109/taai.2013.30.
- [32] R. Gupta, Y.-J. Hur, N. Lavie, Distracted by pleasure: Effects of positive versus negative valence on emotional capture under load., *Emotion* 16 (3) (2016) 328–337. doi:10.1037/emo0000112.
- [33] R. E. Thayer, *The biopsychology of mood and arousal*, Oxford University Press, 1989.
- [34] H. S. Minhat, R. Mohd Amin, Sociodemographic Determinants of Leisure Participation Among Elderly in Malaysia, *Journal of Community Health* 37 (4) (2011) 840–847.

- [35] J. M. Hartgerink, J. M. Cramm, T. Bakker, A. M. van Eijnden, J. P. Mackenbach, A. P. Nieboer, The importance of multidisciplinary teamwork and team climate for relational coordination among teams delivering care to older patients, *Journal of Advanced Nursing* 70 (4) (2014) 791–799.
- [36] G. Fernández-Mayoralas, F. Rojo-Pérez, P. Martínez-Martín, M.-E. Prieto-Flores, C. Rodríguez-Blázquez, S. Martín-García, J.-M. Rojo-Abuín, M.-J. Forjaz, Active ageing and quality of life: factors associated with participation in leisure activities among institutionalized older adults, with and without dementia, *Aging & Mental Health* 19 (11) (2015) 1031–1041.
- [37] D. Muñoz, F. Gutierrez, S. F. Ochoa, N. Baloian, Enhancing social interaction between older adults and their families, in: *International Workshop on Ambient Assisted Living*, Springer, 2013, pp. 47–54.
- [38] P. J. Chang, L. Wray, Y. Lin, Social relationships, leisure activity, and health in older adults, *Health Psychol* 33 (46) (2014) 516–523.
- [39] M. V. Villarejo, B. G. Zapirain, A. M. Zorrilla, A stress sensor based on galvanic skin response (GSR) controlled by ZigBee, *Sensors (Switzerland)* 12 (5) (2012) 6075–6101. doi:10.3390/s120506075.
- [40] F. Nasoz, K. Alvarez, C. L. Lisetti, N. Finkelstein, Emotion recognition from physiological signals using wireless sensors for presence technologies, *Cognition, Technology & Work* 6 (1) (2004) 4–14. doi:10.1007/s10111-003-0143-x.
- [41] J. A. Russell, A circumplex model of affect, *Journal of Personality and Social Psychology* 39 (1980) 1161–1178.
- [42] H. D. Critchley, Review: Electrodermal responses: What happens in the brain, *The Neuroscientist* 8 (2) (2002) 132–142, PMID: 11954558. doi:10.1177/107385840200800209.
- [43] Firstbeat Technologies Ltd., *Stress and Recovery Analysis Method Based on 24-hour Heart Rate Variability* (2014) 1–13.

- [44] P. J. Lang, M. M. Bradley, B. N. Cuthbert, International affective picture system (IAPS): Affective ratings of pictures and instruction manual, Tech. Rep. A-8, The Center for Research in Psychophysiology, University of Florida, Gainesville, FL (2008).
- 685 [45] M. Bradley, P. J. Lang, Measuring Emotion: The Self-Assessment Semantic Differential Manikin and the, *Journal of Behavior Therapy and Experimental Psychiatry* 25 (I) (1994) 49–59. [arXiv:0005-7916\(93\)E0016-Z](https://arxiv.org/abs/0005-7916(93)E0016-Z), [doi:10.1016/0005-7916\(94\)90063-9](https://doi.org/10.1016/0005-7916(94)90063-9).
- 690 [46] R. Picard, E. Vyzas, J. Healey, Toward machine emotional intelligence: analysis of affective\physiological state, *IEEE Transactions on Pattern Analysis and Machine Intelligence* 23 (10) (2001) 1175–1191. [doi:10.1109/34.954607](https://doi.org/10.1109/34.954607).