

AOP 2022



Guimarães, Portugal,
July 18–22, 2022

V International Conference on
Applications of Optics and Photonics

BOOK OF **ABSTRACTS**

Edited by: Manuel Filipe P. C. M. Costa



SPOF

Portuguese Society for
Optics and Photonics
www.optica.pt



BOOK OF
ABSTRACTS

Copyright © 2022, SPOF

Published by:

SPOF, Sociedade Portuguesa para a Investigação
e Desenvolvimento em Óptica e Fotónica
Portugal
<http://www.optica.pt/>
contact@optica.pt

Editor:

Manuel Filipe P. C. M. Costa

ISBN 978-989-8798-08-4

Printed by: Copissaurio Repro – Centro Imp. Unip. Lda.
Campus de Gualtar, Reprografia Complexo II,4710-057 Braga, Portugal
Number of copies: 250
First printing: July 2022
Distributed worldwide by SPOF,
Sociedade Portuguesa para a Investigação e Desenvolvimento em Óptica e Fotónica
contact@optica.pt
Full text available online (open access) at <https://aop2022.org>

The abstracts published in this book are exclusive responsibility of the authors.
Please use the following format to cite material from this book:
Author(s). Title of Abstract. 5th International Conference on Applications of Optics and Photonics,
Costa MF (Ed); SPOF, 2022, Page numbers.

The authors of this book and the SPOF, none of them, accept any responsibility for any use of the
information contained in this book.

All rights reserved.

Permission to use is granted if appropriate reference to this source is made, the use is for educational
purposes and no fees or other income is charged.

ORGANIZATION



SPOF



Territorial
Committee
of Portugal

In cooperation with



RIAO



SPIE.
Cooperating Organization

IOP Publishing



SUPPORT & SPONSORS



RIAO



SPIE.
Cooperating Organization



AOP 2022 COMMITTEES

Conference Chair

Manuel Filipe P. C. M. Costa (University of Minho, Portugal)

Technical Chairs

Optical Communications and Sensors

Rogério Nogueira (University of Aveiro)

Ana Rocha (IT-Aveiro)

Optical Fibers and Applications

Orlando Frazão (University of Porto)

Susana Silva (INESC-Tec)

High Power Lasers. Nonlinear Optics. Ultrafast Lasers and Ultrafast Optics

Gonçalo Figueira (University of Lisbon)

Helder Crespo (University of Porto)

Theoretical, Computational and Quantum Optics

Ariel Guerreiro (University of Porto)

Optical Metrology, Illumination, Image Processing and Industrial Applications

Paulo Tavares (University of Porto)

Manuel Filipe Costa (University of Minho)

Biomedical and Medical Applications of Optics & Photonics

António Lobo (University Fernando Pessoa)

Susana Novais (INESC-Tec)

Biophotonics

Pedro Jorge (University of Porto)

Optometry, Ophthalmic Optics, Color and visual sciences

António Baptista (University of Minho)

Paulo Fiadeiro (University of Beira Interior)

Sandra Franco (University of Minho)

Nano-Photonics and Optoelectronics

José Manuel Baptista (University of Madeira)

Optical Instrumentation for Space and Astronomy

Manuel Abreu (University of Lisbon)

Alexandre Cabral (University of Lisbon)

Optical Design

João Pinto Coelho (University of Lisbon)

Microwave Photonics

José Figueiredo (University of Lisbon)

Optics & Photonics for Smart Cities and Sustainability

José António Rodrigues (University of Algarve)

Optics and Photonics Education and Outreach

Alexandre Cabral (University of Lisbon)

Other topics

Manuel Filipe Costa (University of Minho)

Scientific Committee

- Amália Martínez
(CIO, Mexico)
- Amparo Pons Martí
(University of Valencia, Spain)
- Anna Consortini
(University of Florence, Italy)
- Anand Krishna Asundi
(OPSS, Singapore)
- Andrea Cusano
(University of Sannio, Italy)
- Andrew Moore
(Herriot-Watt University, Scotland)
- Andrés Márquez Ruiz
(Universidade de Alicante, Spain)
- Angel Augier Calderin
(INSTEC, Cuba)
- Angel I. Negueruela
(University of Zaragoza, Spain)
- Angela M. Guzman
(CREOL, USA)
- Asticio Vargas
(Universidad de La Frontera, Chile)
- Benoît Boulanger
(Néel Institute / Société Française d'Optique, France)
- Carlos Ferreira
(Universidad de Valencia, Spain)
- Carlos Saavedra Rubilar
(Universidad de Concepción, Chile)
- Cesar Augusto Costa Vera
(Escuela Politécnica Nacional, Ecuador)
- Clementina Timus
(INFLR, Romania)
- Cristiano M. B. Cordeiro
(University of Campinas, Brazil)
- Cristina Margarita Gomez-Sarabia
(Universidad de Guanajuato, Mexico)
- Daniel Malacara Hernández
(CIO - Center for Optics Research, Mexico)
- Efraín Solarte Rodríguez
(RCO, Colombia)
- Eric Rosas
(CIO, Mexico)
- Gonçalo Figueira
(University Nova de Lisboa, Portugal)
- Guillermo Baldwin
(University Pontificia Catholic University of Peru)
- Hai-Ning Cui
(University of Nanjin, China)
- Hector Rabal
(CIOP - Center for Optics Research, Argentina)
- Humberto Michinel (University of Vigo, Spain)
- Hypolito Kalinowski
(UTFPR, Brazil)
- Ignacio Moreno Soriano
(Universidad Miguel Hernandez, Spain)
- Imrana Zahid
(ICO-TC, Pakistan)
- James Wyant
(University of Arizona, USA)
- Jana Nieder
(INL, Portugal)
- Jesús Lancis
(Universitat Jaume I, Spain)
- Joaquín Campos Acosta
(Instituto de Óptica, CSIC, Spain)
- João Lemos Pinto
(I3N, Aveiro, Portugal)
- João Manuel Tavares
(University of Porto, Portugal)
- Jorge Ojeda-Castaneda
(Universidad de Guanajuato, Mexico)
- Jose Benito Vazquez-Dorrio
(University of Vigo, Spain)
- José Figueiredo
(University of Algarve, Portugal)
- José Luis Paz
(CTOV, Venezuela)
- José Ramiro Fernandes
(UTAD, Portugal)
- José R. Salcedo
(Portugal)
- José Manuel de Nunes Vicente Rebordão
(New University of Lisbon, Portugal)
- Juan G. Darias Gonzalez
(CEADEN, Cuba)
- Luciano Alberto ANGEL-TORO
(RCO, Colombia)
- Luis Miguel Bernardo
(University of Porto, Portugal)
- Luis Roso
(Centro de Láseres Pulsados Ultracortos Ultraintensos, Spain)
- Luís Silvino
(Universidade do Minho, Portugal)
- Katrina Svanberg
(University of Lund, Sweden)
- Kiyofumi Matsuda
(AIST, Tsukuba, Japan)
- Kim Chew Ng
(Monash University, Australia)
- Manuel Lopez-Amo
(Public University of Navarra, Spain)

Manuel Melgosa Latorre (University of Granada, Spain)	Paulo Fiadeiro (University of Beira Interior, Portugal)
Maria Josefa Yzuel (Autonomous University of Barcelona, Spain)	Paulo Tavares (University of Porto, Portugal)
Maria Luisa Calvo (ICO, Spain)	Pedro Andrés RIAO (University of Valencia, Spain)
Maria Sagrario Millan (Polytechnical University of Catalonia, Spain)	Radu Chisleag (Technical University of Bucharest, Romania)
Mário Vaz (INEGI, Porto, Portugal)	Ramón Rodríguez-Vera (CIO, Mexico)
Maité Flores-Arias (University of Santiago de Compostela, Spain)	Rastogi Pramod (EPFL, Switzerland)
Marta Ramos (University of Minho, Portugal)	Robert Lieberman (SPIE President, USA)
Michael Scott Belsley (Universidade do Minho)	Roger Ferlet (University of Paris, France)
Miguel Gonzalez Herraes (University of Alcalá, Spain)	Salvador Bará (University of Santiago de Compostela, Spain)
Mikiya Muramatsu (University of S. Paulo, Brazil)	Sabry Abdel-Mottaleb (Ain-Shams University, Egypt)
Mikhail Vasilevski (University of Minho, Portugal)	Sun Tong (City University, UK)
Mourad Zghal (STO, Tunisia)	Toyohiko Yatagai (SPIE Past-President, Japan)
Mustafa Erol (Bozok University, Turkey)	Waclaw Urbanczyk (Wroclaw University of Technology, Poland)
Pablo Artal (University of Murcia, Spain)	Zuqing Zhu (University of Science and Technology of China, China)

Program Committee

Alexandre Cabral (Portugal)	Joaquim Carneiro (Portugal)
Amit Garg (India)	Jose Benito Vazquez-Dorrio (Spain)
Anand Krishna Asundi (Singapore)	José Figueiredo (Portugal)
Angel Augier Calderin (Cuba)	José Luis Paz (Venezuela)
Angela M. Guzman (USA)	José Luís Santos (Portugal)
Ana Maria Rocha (Portugal)	José Manuel Baptista (Portugal)
Antonio Batista (Portugal)	José R. Salcedo (Portugal)
António Lobo (Portugal)	Lúcia Bilro (Portugal)
Carla Carmelo Rosa (Portugal)	Luis Miguel Bernardo (Portugal)
Carlos Saavedra Rubilar (Chile)	Kim Chew Ng (Australia)
Cesar Augusto Costa Vera (Ecuador)	Manuel Filipe P. C. M. Costa (Portugal)
Clementina Timus (Romania)	Manuel Joaquim Marques (Portugal)
Efraín Solarte Rodriguez (Colombia)	Michael Scott Belsley (Portugal)
Eric Rosas (Mexico)	Orlando Frazão (Portugal)
Gerardo Ávila (ESO, Germany)	Pedro Serra (Portugal)
Gonçalo Figueira (Portugal)	Karola Panke (Latvia)
Hai-Ning Cui (China)	Robert Liberman (USA)
Humberto Michinel (Spain)	Rogério Nunes Nogueira (Portugal)
Ireneu Dias (Portugal)	Sandra Franco (Portugal)
João M. P. Coelho (Portugal)	Susana Silva (Portugal)
João Manuel Tavares (Portugal)	Vasco Teixeira (Portugal)

Local Organizing Committee

Manuel Filipe Costa
(University of Minho, Portugal)

António Baptista
(University of Minho, Portugal)

Sandra Franco
(University of Minho, Portugal)

Fernando Ribeiro
(University of Minho, Portugal)

Jessica Gomes
(University of Minho, Portugal)

Andreia Gomes
(University of Minho)

Ana Rita Oliveira Rodrigues
(University of Minho, Portugal)

Joel Borges
(University of Minho, Portugal)

Iran Gomes da R. Segundo
(University of Minho, Portugal)

Orlando de Sousa Lima Júnior
(University of Minho, Portugal)

Cátia Juliana Pereira Afonso
(University of Minho, Portugal)

Mário Rui Pereira
(University of Minho, Portugal)

Elisabete Freitas
(University of Minho, Portugal)

Beatriz Cardoso
(University of Minho, Portugal)

Natália Homem
(University of Minho, Portugal)

Manuela Proença
(University of Minho, Portugal)

Diana I Meira
(University of Minho, Portugal)

Jorge Sousa
(University of Minho, Portugal)

Kishor Sapkota
(University of Minho, Portugal)

João Linhares
(University of Minho, Portugal)

Irina Rio
(University of Minho, Portugal)

Ricardo Fernandes
(University of Minho, Portugal)

Sérgio Veloso
(University of Minho, Portugal)

Ana Rita Veloso
(University of Minho, Portugal)

Melanie Pereira
(University of Minho, Portugal)

Foreword

After two and half years of confinement and major constraints due to the global Covid19 pandemic, the Portuguese Optics and Photonics community and friends from all over the world are going to meeting again in-person for another exciting and enjoyable AOP conference.

In spite the difficulties and challenges that we all are still facing, the renewed and recharged enthusiasm and commitment of the Portuguese Optics and Photonics community and all the around two hundred participants at the conference ensure the great success of the 5th International Conference on Applications in Optics and Photonics, AOP2022, that will take place July 18 to 22, 2022, at the welcoming UNESCO World Heritage historical city of Guimarães in the beautiful northwest of Portugal.

Since 2011 in nearby bi-millennial town of Braga with our first conference, AOP2011, followed by the AOP2014 conference in Aveiro, the AOP2017 at the University of Algarve in Faro, and the last edition, AOP2019, at the University of Lisbon in mid 2019, the conferences of the Portuguese Society for Optics and Photonics successfully celebrate Optics and Photonics and its remarkable contribution to the development of our societies and humankind.

Five plenary, 23 keynote and 17 invited lectures by world renowned researchers and schoolars as well as top level young researchers in all fields of Optics and Photonics, set the high quality standard of a varied and exciting scientific program. The state-of-the art on the widest range of O&P subjects will be reviewed foreseeing and discussing the future of research in Optics and Photonics.

In the open friendly informal environment that characterizes our conferences, a social program with several opportunities for in-person informal interaction will further allow the lively exchange of knowledge and experiences renewing relationships and fostering the establishment of the widest range of cooperation projects and relationships with colleagues and institutions from Portugal and from all around the world.

As chairperson of the conference and president of the Portuguese Society for Optics and Photonics, SPOF, it is my pleasure and honor to welcome you to the sunny city of Guimarães for a most enjoyable and productive Optics & Photonics week!

Universidade do Minho, July 5, 2022.

Manuel Filipe Pereira da Cunha Martins Costa

AOP 2022 – General Program

Monday (July 18)	Tuesday (July 19)	Wednesday (July 20)	Thursday (July 21)	Friday (July 22)
	8:30 - 8:55 Registration	8:30 - 8:55 Registration		
	8:55 - 9:40 Plenary session	8:55 - 9:40 Plenary session	9:10 - 10:10 Registration	9:10 - 9:45 Registration
	9:45 - 10:45 Paralell sessions	9:45 - 10:45 Paralell sessions	10:10 - 11:10 Paralell sessions	9:45 - 11:20 Paralell sessions
	10:45 - 11:15 Coffee break	10:45 - 11:15 Coffee break		
11:00 - 13:45 Registration	11:15 - 12:30 Paralell sessions	11:15 - 12:30 Paralell sessions	11:15 - 12:30 Paralell sessions	11:20 - 12:30 Awards & Closing ceremony
	12:30 - 14:15 Lunch	12:30 - 14:10 Lunch	12:30 - 14:15 Lunch	
13:45 - 14:25 Opening ceremony				
14:25 - 15:55 Plenary session	14:25 - 16:00 Paralell sessions	Social Program - Visit to Braga	14:25 - 15:10 Plenary session	
			15:15 - 16:30 Paralell sessions	
15:55 - 16:25 Coffee break	16:00 - 17:30 Coffee break & Poster session		16:30 - 17:00 Coffee break	
16:30 - 17:45 Paralell sessions			17:00 - 18:30 Paralell sessions	
18:15 - 19:30 Social Program	18:00 - 19:30 Social Program		18:30 - 19:30 SPOF' General Assembly	
		19:30 - 22:30 Conference Dinner	18:30 - ... Social Program	

AOP 2022 – Detailed Program

MONDAY, JULY 18

13:45 - 14:25 - Opening Session

The Vice-Mayor of Guimarães, Dr. Adelina Paula Pinto
 Prof. Dr. Humberto Michinel (Secretary General of ICO)
 Prof. Dr. Gilles Pauliat (President of EOS)
 Prof. Dr. Cesar Costa Vera (Counselour of RIAO)
 Prof. Dr. Luis Plaja (President of SEDOPTICA)
 Prof. Dr. Manuel Filipe Costa (Chairperson and president of SPOF)

14:25 - 15:55 - Plenary Sessions

PI1 & PI2 - Room Flores - Chair(s): António Lobo

6676 (Plenary)	Trends in Optical Coherence Tomography	Adrian Podoleanu
6534 (Plenary)	The role of the laser technologies on the fabrication of organ-on-a-chip devices.	Maria Teresa Flores Arias

Coffee Break

16:30 - 17:50 - Parallel Sessions

Mo.1.a - Room Flores - Chair(s): Hugo Pires

6816 (Keynote)	A touch of symmetry: High-harmonic generation from low-dimensional crystals.	Luis Plaja
6595 (Invited)	Towards 5-cycle, multi-mJ-level mid-IR capability at the L2I	Joana Alves
6707	Scanning the flying focus of a tabletop vortex EUV beam	Patricia Estrela
6736	Various routes for VIS-to-UVC upconverted emission enhancement in lanthanide-doped nanoparticles	Patryk Falat

16:30 - 17:45 - Parallel Sessions

Mo.1.b - Room Sete Cidades - Chair(s): António Lobo

6727	Plasmonic/magnetic liposomes based on nanoparticles with multicore-shell architecture for chemo/thermotherapy	Ana Rita Oliveira Rodrigues
6669	Manganese ferrite nanoparticle clusters covered with gold nanorods for application in cancer phototherapy	Irina Soraia Rainho Rio
6542	Fiber optic sensor for real-time monitoring of cryosurgery depth	Aris Ikiades
6686	Pressure and Angle Sensors with Optical Fiber for Instrumentation of the PrHand Hand Prosthesis	Camilo Arturo Rodríguez Díaz
6691	Development of tissue-mimicking phantoms for jaundice assessment device validation	Fernando Sacilotto Crivellaro

16:30 - 17:50 - Parallel Sessions

Mo.1.c - Room S. Miguel - Chair(s): Justo Arines

6185	Atmospheric Dispersion Correction for High-Resolution Spectrographs: Past, Present, and Future	Bachar Wehbe
6411	Comparison between the scanning pentaprism and the Hartman method for wavefront analysis	Nuno Gonçalves
6509	Imaging sensors for spatially resolved solar spectroscopy instrument	Inês Leite
6513	Characterization of Light Diffraction by a Digital Micromirror Device	Cédric Pereira
6611	Development of optical characterization and testing instrument for Sentinel-5 Earth Observation mission	Juliana Kuhlmann Abrantes

Social Program

TUESDAY, JULY 19

8:55 - 9:40 - Plenary Session

PI3 - Room Flores - Chair(s): Giulia Fulvia Mancini

6622 (Plenary)	Topological Optical Clusters	Humberto Michinel
-------------------	-------------------------------------	-------------------

9:45 - 10:45 - Parallel Sessions

Tu.1.a - Room Flores - Chair(s): Jorge Vieira

6555 (Keynote)	Time-refraction and temporal optical processes	Jose Tito Mendonca
6507	Model Hamiltonians of open quantum optical systems: Evolution from hermiticity to commutativity	Konstantin Zloshchastiev
6803	Investigation of cold atom turbulent dynamics through a spatially resolved pump-probe diagnostic.	Ruggero Giampaoli

9:45 - 10:45 - Parallel Sessions

Tu.1.b - Room Sete Cidades - Chair(s): Joel Borges

5964 (Invited)	Dots-in-Host Semiconductors for Improved Light Management	Miguel Diogo Furtado Alexandre
6533 (Invited)	Label-Free Multiparametric Analysis Using Photonic Crystal-Based Biosensors	Galina Nifontova
6587	Study of the impact on the absorption of III-V semiconductor nanopillars coated with dielectric-metal shells	Joao Pedro Pinheiro Lourenço

9:45 - 10:45 - Parallel Sessions

Tu.1.c - Room S. Miguel - Chair(s): Sandra Franco

6530	Synchronous and asynchronous 3D examination of the eye with a slit lamp	Justo Arines
6529	Teaching Optometry: setup for understanding the subjective refraction protocol and patient answers	Justo Arines
6504	A Pilot Outreach Program for Optics and Photonics: Develop the Advanced and Pioneering Concepts	Haider M. Al-Juboori

Coffee Break

11:15 - 12:30 - Parallel Sessions

Tu.2.a - Room Flores - Chair(s): Mikhail Vasilevskiy

6592 (Keynote)	Optical properties of low dimensional materials	Pawel Hawrylak
6600 (Keynote)	Superradiant optical shocks in arbitrarily diluted media	Jorge Vieira
6656 (Invited)	Reversible and non-reversible effects of silver nanoparticles on the photoluminescence properties of quantum emitters	Victor Krivenkov

11:15 - 12:30 - Parallel Sessions

Tu.2.b - Room Sete Cidades - Chair(s): António Lobo

6567 (Keynote)	Multi-wavelength optical phase unwrapping using low coherence Mirau interferometer	Amalia Martínez-García
6488	White light interferometer for Fabry-Perot cavities sensors with absolute physical measurement	João Manuel Gonçalves Pereira dos Reis
6711	A Low-cost Portable Interrogator for Dynamic Monitoring of Wavelength-Based Sensors	Camilo Arturo Rodríguez Díaz
6715	Development of a Low-Cost Interrogation System Using a MEMS Fabry-Pérot Tunable Filter	João Carlos Costa Araújo

11:15 - 12:30 - Parallel Sessions

Tu.2.c - Room S. Miguel - Chair(s): Maria Teresa Flores-Arias

6701	Single-cycle laser pulses through nonlinear pulse compression	Mariana Silva
6606	Pulse broadening and compression of visible spectral range laser in a Herriott cell	Victor Hariton
6681 (Invited)	YCOB based ultrabroadband optical parametric amplification with a sub-picosecond pump source	Hugo Pires
6486 (Invited)	High contrast front-end for a petawatt laser system designed for electron acceleration and high intensity laser-matter applications towards advanced compact particle accelerators	Mario Galletti

Lunch

14:25 - 15:55 - Parallel Sessions

Tu.3.a - Room Flores - Chair(s): António Baptista

6527 (Keynote)	Engineering the pupil for wavefront masking	Justo Arines
6709	What is the impact of accommodative insufficiency on the optical quality of the eye?	Jessica Rafaela Moreira Gomes
6528	Low cost adherent lenses for presbyopia	Justo Arines
6589	Assessment of central and peripheral accommodative lag by aberrometry	Kishor Sapkota
6479	Comparison between central corneal thickness, anterior chamber depth and axial length values with and without contact lenses	Hugo Pena-Verdeal

14:25 - 16:00 - Parallel Sessions

Tu.3.b - Room Sete Cidades - Chair(s): Elisabete Freitas

6744 (Keynote)	Subaquatic laser induced plasma-assisted ablation for channels and wells fabrication on glass substrates	Carmen Bao
6695 (Invited)	Optimization of pulsed laser deposition process of superconducting YBa₂Cu₃O_{7-δ} films	Mohd Mustafa Awang Kechik
6828	Optical, structural, morphological and chemical properties of doped TiO₂ nanoparticles with FeCl₃	Cátia Juliana Pereira Afonso
6813	Thermochromism applied to Transportation Engineering: asphalt roads and paints	Orlando de Sousa Lima Júnior
6723	Photocatalytic degradation of Malachite green using magnetic zinc and magnesium ferrite nanoparticles functionalized with silver under visible light irradiation	Ricardo Jorge Cunha Fernandes

14:25 - 15:55 - Parallel Sessions

Tu.3.c - Room S. Miguel - Chair(s): Ana Rita Rodrigues

6837 (Keynote)	Ultrafast spectroscopy of biomolecules in the ultraviolet range	Rocío Borrego-Varillas
6607	Assessment of lipid formulations to develop multi-stimuli-responsive solid magnetoliposomes using fluorescence-based methodologies	Beatriz Dias Cardoso
6724	Highly selective, compact and efficient vertical in-coupling for interferometric optical biosensors	Ursula Fernanda Salazar Roggero
6734	Development of an Escherichia coli optical biosensor with computational validation	Regina Célia da Silva Barros Allil

16:00-17:30 - Poster Sessions & Coffee Break

Tu.T - Room Funchal - Chair(s): Manuel Filipe Costa | Iran Rocha Segundo (*max. poster size - A0*)

6696	Design and simulation of 3D printed freeform optics elements	Ana Rocha
6666	Amorphous Silicon Photonic Integrated Circuit for beam steering in Lidar applications	Alessandro Fantoni
6731	Ocular accommodation and wavefront aberration in university students	Alshaarawi M.A. Salem
6579	Effect of accommodation on coma at central and peripheral retina	Kishor Sapkota
6548	Influence of absorptive tinted filter lenses on contrast sensitivity in healthy participants under three different environmental conditions	Jacobo Garcia-Queiruga
6547	Meibomian gland loss area and its relationship with eyelid margin hyperemia and MG orifice plugging	Jacobo Garcia-Queiruga
6546	Differences in the values of Anaglyphs, vectograms and cheirosopes on participants with low, normal, and high AC/A ratio	Hugo Pena-Verdeal
6545	Comparison of three methods for measuring far and near vision heterophoria in free space	Hugo Pena-Verdeal
6481	Analysis of the Interferential Lipid Pattern change through 4 and 6 years in Dry Eye Disease patients	Hugo Pena-Verdeal
6720	Hyperspectral Colorimetry of in-vivo dental structures	María de la Natividad Tejada Casado
6615	Reservoir computing with nonlinear optical media	Tiago David da Silva Ferreira
6732	Detection of Acetic Acid Using a Balloon-type Optical Fibre Sensor	Ana Isabel Freitas

6726	Autonomous Optical Tweezers: from automatic trapping to single particle analysis	Felipe Coelho Moreira Ribeiro Coutinho
6718	Absorption and scattering coefficients in the 240-780nm range of daily disposable contact lenses	Javier Ruiz López
6716	Guiding losses estimation in hydrogel-based waveguides	Juan Antonio Vallés
6708	Noise analysis in self-interference incoherent digital holography	Elena Stoykova
6689	Thermoelectric imaging using photothermal radiometry of carriers, photoluminescence mapping in aged samples of GaAs:Sn	Samuel Eligio Zambrano Rojas
6679	Methods of optical fibre probes machining for holographic micro-endoscopy	Miroslav Stibůrek
6651	Integrating Laser induced breakdown spectroscopy and photogrammetry towards 3D element mapping	Pedro Miguel Oliveira Rodrigues
6649	Listening plasmas in Laser Induced Breakdown spectroscopy	Rafael Anjo Cavaco
6644	Multimodal approach to mineral identification: merging Laser induced breakdown spectroscopy with hyperspectral imaging	Tomás José Moreira Lopes
6640	Drying Patterns of Cerebrospinal Fluid as Indicator for Alzheimer's Disease by a Machine Learning Framework	Laura Arévalo Díaz
6629	Low-Cost Ultrafine Motion Control System Design for Nano Positioning and Beam Steering	Gaurav Rajput
6628	Color interferometry using the fractional Fourier transform	Juan Manuel Vilardy Ortíz
6627	Real color fractional Fourier transform holograms using fiber optics	Juan Manuel Vilardy Ortíz
6621	Towards real-time identification of trapped particles with UMAP-based classifiers	Joana Magalhães B. Teixeira
6620	Raman based DTS using a 1064 nm pump	Joana dos Santos Saraiva Vieira
6612	Robust calibration models for the mining industry: from spectral similarity to multimodal analysis	Nuno Miguel Azevedo Silva
6572	Nonlinear encryption for multiple images based on a joint transform correlator and the Gyrator transform	Ronal A. Perez
6571	Double image encryption system using a nonlinear joint transform correlator in the Fourier domain	Ronal A. Perez
6570	Convolution, correlation and generalized shift operations based on the Fresnel transform	Juan Manuel Vilardy Ortíz
6526	Electricity generation from solar irradiation using the Seebeck effect	Jhonfri Mendonza Cantillo
6524	Multiplexed holographic lenses applied to solar concentrators and passive solar trackers	Eder Manuel Alfaro Alfaro
6490	GUI-Based Phase Retrieval Algorithm for the Reconstruction of the Longitudinal Component of Electromagnetic Beams	Marcos Aviñoá Pérez
6474	Percentage estimate of the coffee seeds germination using processing of dynamic speckle images	Juan Manuel Vilardy Ortíz
6929	Optical generation of surface plasmons in graphene with femtosecond laser pulses	Rui Jorge Pinto Dias
6537	Au-ZnO thin films: Influence of gold concentration and annealing on the microstructure and plasmonic response	Patrícia Alexandra P. da Silva
6699	Diffraction optical element fabrication at chalcogenide thin film surface	Vadims Kolbjonoks
6557	Hand grip strength using an FP sensor embedded in 3D printed cantilever	Susana Novais
6488	White light interferometer for Fabry-Perot cavities sensors with absolute physical measurement	João Manuel G. Pereira dos Reis

6619	Fabry-Perot cavity based on silica tube with steel for Physical parameters measurements	Cristina do Carmo G. Cunha
6510	Simulation and development of a prototype for high precision surface metrology	Sílvia Rodrigues Costa
6508	Development of plasmonic thin films for new biodetection approaches	Diana Meira

Posters online

6690	Ionisation of camphor molecule doped in helium nanodroplets by EUV and soft X-ray photons	Sanket Sen
6700	Effect of bandwidth on Two Plasmon decay instability	Sonali Khanna
6697	Electron spectrum and angular distribution from aerosol jet collimated by an aerodynamic lens	Ravishankar Sugumar
6556	Relativistic electron acceleration at non-relativistic intensities using sub-lambda targets	Ratul Sabui

Social Program

WEDNESDAY, JULY 20

8:55 - 9:40 - Plenary Session

PI4 - Room Flores - Chair(s): Sandra Franco

6500 (Plenary)	Peripheral optics in the eye: from myopia to cataracts	Pablo Artal
-------------------	---	-------------

9:45 - 10:45 - Parallel Sessions

We.1.a - Room Flores - Chair(s): António Baptista

5998 (Keynote)	Some recent advances in color science	Manuel Melgosa
6721	Color prediction of monolithic and layered dental resin composites of varying thicknesses	María de la Natividad Tejada Casado
6717	Effect of thickness and printing angle on color of 3D printing dental restorative polymer-based materials.	Javier Ruiz López

9:45 - 10:45 - Parallel Sessions

We.1.b - Room Sete Cidades - Chair(s): Paulo Tavares

6713 (Keynote)	Standardization of Diffractive Optical Surfaces	Michael Pfeffer
6601 (Invited)	Optical design for Sport Optics	João Tiago Costa Silva

9:45 - 10:45 - Parallel Sessions

We.1.c - Room S. Miguel - Chair(s): Jorge Vieira

6860 (Keynote)	Photon bubble turbulence in cold atomic gases: astrophysics in the lab	Hugo Terças
6616	Experimental turbulent states with paraxial fluids of light in photorefractive media	Tiago David da Silva Ferreira
6047	Expansion Dynamic and Characterization of Stagnation Layer in Laterally Colliding Plasmas: Dependence of Observation Bandwidth and Plasma Plume Separation	Haider M. Al-Juboori

Coffee Break

11:15 - 12:15 - Parallel Sessions

We.2.a - Room Flores - Chair(s): Nuno Azevedo Silva

6817 (Keynote)	On the total estimation of the electromagnetic field in the focal area with no interaction with the media	David Maluenda Niubó
6632	Contribution to the improvement of the correlation filter method modal analysis with a spatial light modulator	David Benedicto Baselga
6056	Design concepts of a new imaging system for a high-intensity XUV source beam by colour centres excitation in lithium fluoride crystals	Haider M. Al-Juboori

11:15 - 12:30 - Parallel Sessions

We.2.b - Room Sete Cidades - Chair(s): Susana Novais

6685	Rubber vulcanization method for FBG pressure sensors	Camilo Arturo Rodríguez Díaz
6722	A FBG based sensor for horizontal displacement measurements of a small scale tailing dam model.	Willian Lima de Oliveira Filho
6950	Fatigue crack growth monitoring using Electronic Speckle Pattern Interferometry	Frederico Preto Direito
6704	Innovative hybrid optical sensing design to simultaneously discrimination of pressure and temperature	Fábio Henrique Baptista de Freitas
6682	A Fiber Bragg Grating based Accelerometer for Monitoring the Vibration of an Industrial Engine Prototype: A Preliminary Study	Camilo Arturo Rodríguez Díaz

11:15 - 12:30 - Parallel Sessions

We.2.c - Room S. Miguel - Chair(s): José António Rodrigues

6725 (Invited)	Azobenzene based on-fiber waveplates for polarization control	Paulo António M. F. Ribeiro
6593	Optimal filtering of measured Mueller matrices using full Poincaré polarimetry	Juan Carlos Suárez-Bermejo
6591	Estimation of Zernike polynomials for a highly focused electromagnetic field using polarimetric mapping images and neural networks	Kavan Ahmadi
6968	The development of test station to characterize the capabilities of emission of LiDAR	Nelsson Fernandez da Cunha
6523	Implementation of a Scheimpflug Lidar for Assessment of Native Aerofauna in Tropical Forests in Ecuador	Cesar Costa-Vera

Lunch

Social Program

THURSDAY, JULY 21

10:10 - 11:15 - Parallel Sessions

Th.1.a - Room Flores - Chair(s): Bruno Romeira

(Keynote)	To be announced	Bert Offrein
6531 (Invited)	Neural network computing with large-area lasers	Xavier Porte
6774	Photonic Neuromorphic Computing with Vertical Cavity Surface Emitting Lasers	Antonio Hurtado

10:10 - 11:10 - Parallel Sessions

Th.1.b - Room Sete Cidades - Chair(s): Amalia Martínez-García

6584	Dynamic speckle Imaging with SVD compression	Mikhail Levchenko
6512	Data Augmentation in 3D Object Detection for self-driving vehicles: the role of original and augmented training samples	Xavier Santos
6145	Intrinsic temperature-compensated fibre optic current/magnetic sensor	Paulo Robalinho
4733	Considerations involving the determination of the band gap energy by diffuse reflectance spectroscopy	Iran Gomes da Rocha Segundo

Coffee Break

11:15 - 12:30 - Parallel Sessions

Th.2.a - Room Flores - Chair(s): Ana Rocha

6578	Coupled two-cores integrated waveguides modal analysis	David Benedicto Baselga
6661	Analysis of power transfer between two multi-core fibers with long-period gratings	Liliana Mendes Sousa
6564	Indoor Guidance of Automated Guided Using Visible Light Communication	Paula Maria Garcia Louro
6544	Cooperative Traffic Control using Visible Light Communication	Manuel Augusto Vieira
6532	Visible Light Communication-based Indoor Navigation for Mobile Users in Large Buildings	Manuela Vieira

11:15 - 12:35 - Parallel Sessions

Th.2.b - Room Sete Cidades - Chair(s): José Manuel Baptista

6804 (Keynote)	Photonic tools for single cell analysis	Pedro Alberto da Silva Jorge
6650 (Invited)	Generation of high-frequency photoacoustic pulses to enhance skin permeation of active molecules	Celso Paiva João
6730	Multifunctional liposomes containing magnetic and gold nanoparticles for cancer therapy	Mélanie R. Pereira (Ana Rita Oliveira Rodrigues)
6641	Detection of Alzheimer's by Machine Learning-assisted Vibrational Spectroscopy in Human Cerebrospinal Fluid	Laura Arévalo Díaz

11:15 - 12:30 - Parallel Sessions

Th.2.c - Room S. Miguel - Chair(s): Bruno Romeira

6693 (Keynote)	Insect-Brain inspired Neuromorphic Nanophotonics	Anders Mikkelsen
6610 (Invited)	Dendritic-like computation using multimode optical fibers	Miguel C. Soriano
6586 (Invited)	High-speed Silicon Photonic neuromorphic computing enabled by hardware-aware deep learning methods	Miltiadis Moralis-Pegios
6636	Optical Computing with Extreme Learning Machines	Nuno Miguel Azevedo Silva

Lunch

14:25 - 15:10 - Plenary Session

PI5 - Room Flores - Chair(s): Humberto Michinel

6568 (Plenary)	Ultrafast ptychography: from tabletop HHG to Free Electron Lasers	Giulia Fulvia Mancini
-------------------	--	-----------------------

15:15 - 16:30 - Parallel Sessions

Th.3.a - Room Flores - Chair(s): Paulo Ribeiro

7071 (Keynote)	Ultra-fast Laser-induced Molecular Dissociations on Plasmonic Nanoparticles Driven by Tailored Optical Fields: Mass Spectrometric Evaluations	Cesar Costa-Vera
6660	Hollow square core fiber sensor for physical parameters measurement	Diana Sofia Antunes Pereira
6735	Silicon Nitride Interferometers for Optical Sensing with Multi-micron Dimensions	João Costa
6733	Fiber Loop Mirror temperature sensor interrogated with different techniques	António Vaz Rodrigues
6522	Plasmonic and Thermal Properties of Nanostructured Systems Probed with Low-cost Optical Setups	Cesar Costa-Vera

15:15 - 16:30 - Parallel Sessions

Th.3.b - Room Sete Cidades - Chair(s): Rogério Nogueira

6465 (Keynote)	Highly Sensitive Plasmonic Sensors and Biosensors realized via Polymer Waveguides	Nunzio Cennamo
6551 (Keynote)	Improving plasmonic sensing with suspended core fibres and metallic nanostructured inclusions	José Manuel Baptista
6639	Strongly coupled plasmonic systems on optical fiber sensors	Paulo Sérgio Soares dos Santos

15:15 - 16:30 - Parallel Sessions

Th.3.c - Room S. Miguel - Chair(s): José Figueiredo

6740 (Keynote)	Room-Temperature Electroluminescence in RTDs: Towards a Universal Model	Elliot R Brown
6574	Dual-functioning emitter-receiver III-V unipolar and bipolar microLEDs for on-chip neuromorphic photonic circuits	Bejoys Jacob
6625	Resonant Tunnelling Diode – Photodetectors for spiking neural networks	Joao Pedro Pinheiro Lourenço
6692	Towards spiking laser diodes on a III-V/Si nanophotonic platform for neuromorphic applications	Ekaterina Malysheva

Coffee Break

17:00 - 18:30 - Parallel Sessions

Th.4.a - Room Flores - Chair(s): Pedro Jorge

6953 (Keynote)	Optical nanoantennas: from sensing to killing cancer	Pablo Albella Echave
6667 (Keynote)	Au nanoparticles/semi-conductor thin film prepared by laser annealing and sol-gel	Olivier Soppera
6727	Plasmonic/magnetic liposomes based on nanoparticles with multicore-shell architecture for chemo/thermotherapy	Ana Rita Oliveira Rodrigues

17:00 - 18:00 - Parallel Sessions

Th.4.b - Room Sete Cidades - Chair(s): Orlando Frazão

6535	Gas detection with high-resolution LSPR spectroscopy	Maria Manuela Carvalho Proença
6714	Photonic Crystal Design for Bloch Surface Wave Sensing	Bernardo Santos Dias
6673	Advanced refractive index sensor using 3-dimensional metamaterial based nano antenna array	Sneha Verma
3724	Humidity and touch sensing by capacitive-type sensors obtained by electrochemical anodization	Iran Rocha Segundo
7103	25G Receiver and Analysis of Filters Frequency Response	Adebayo Abejide

17:00 - 18:30 - Parallel Sessions

Th.4.c - Room S. Miguel - Chair(s): José Figueiredo

6613 (Keynote)	Brain-inspired nanophotonic spike computing	Bruno Miguel Patarata
(Keynote)	To be announced	Edward Wasige
6706	Two-photon polymerization simulation and fabrication of 3D microprinted suspended waveguides for on-chip optical interconnects	Artur Andrishak
6671	Subwavelength structures for taper waveguides	Paulo Lourenço
6623	MMI Splitters and Combiners for Multi-Micron Amorphous Silicon Nitride Rib Waveguides	Daniel Gonçalves Pita Santos de Almeida

FRIDAY, JULY 22

9:45 - 11:00 - Parallel Sessions

Fr.1.a - Room Flores - Chair(s): Pedro Jorge | Beatriz Dias Cardoso

6654 (Keynote)	Molecularly imprinted nanoparticles: plastic antibodies for optical sensing platforms.	Alessandra Maria Bossi
7135 (Keynote)	Nanoscopy, Metabolic Imaging and Intracellular Sensing based on Nanophotonics and Nonlinear Microscopy	Jana Nieder
6536	Dehydropeptide-based plasmonic lipogels as bionanosystems for controlled drug release	Sérgio Rafael da Silva Veloso
6659	Nanoscale distance sensing using fluorescently-labelled DNA origami tetrahedra on Graphene	João Duarte Gonçalves Azevedo
6729	Development of pH-sensitive magnetoliposomes containing shape anisotropic magnetic nanoparticles for applications in dual cancer therapy	Ana Rita F. Pacheco

9:45 - 11:20 - Parallel Sessions

Fr.1.b - Room Sete Cidades - Chair(s): Susana Silva | Orlando Frazão

6561 (Invited)	Optical harmonic Vernier effect: properties and applications	André Rodrigues Delgado Coelho Gomes
6684	Optofluidic fibre sensor for the real-time measurement of refractive index	João Micael da Silva Leça
6657	Simultaneous measurement of displacement and temperature using balloon-like hybrid fiber sensor	João Pedro Fidalgo Santos
6712	Characterization of a D-shaped photonic crystal fiber with two silver-Al₂O₃ nanowire metamaterial layers	Amanda de Freitas Romeiro
6703	Optical fiber sensor based on balloon-like interferometer structure and 3D printer for displacement sensing	Victor Henrique R. Cardoso
6710	Evaluation of the orientation impact in thermal behavior of cylindrical Li-ion batteries in different cycling conditions using FBG sensors	Lucca de Carvalho Matuck

9:45 - 11:20 - Parallel Sessions

Fr.1.c - Room S. Miguel - Chair(s): Mohd M. Awang Kechik | Paulo Ribeiro

6694 (Invited)	Magneto-piezoresistance in magnetorheological elastomer for low range conductive feedback	Muhammad Kashfi Bin Shabdin
6705	Investigation on the operation modes of optoelectronic oscillators based on resonant tunnelling diodes	Tiago Colaço S. da Franca Ferro
6516	Optimizations of Si PIN Diode Phase-Shifter Combined with RC Equalizer Under Forward Biasing	Dror Malka
6174	Impact of Sm on microstructure and Faraday magneto-optical effects of transparent Y₂O₃ ceramics	Andrzej Kruk
6662	Optical Fiber Sensors for Monitoring Cement Paste Carbonation	Pedro Miguel Madeira da Silva
6830	Reducing the sunlight impacts in urban areas using asphalt mixtures with phase change materials: a review in Scopus in the last 3 years	Iran Gomes da Rocha Segundo

Awards and Closing Ceremony 11:25-12:30

Abstracts

Trends in Optical Coherence Tomography

Adrian Podoleanu

Applied Optics Group, School of Physical Sciences, University of Kent, Canterbury,
CT2 7NH, UK

ap11@kent.ac.uk

Abstract. The number of publications on optical coherence tomography (OCT) continues to evolve and OCT applications in the eye imaging still dominate the field [1].

The presentation will review technical perspectives of recent developments in optical sources, scanning, tracking and signal processing that with further refinements can be translated to better imaging relevant to medical imaging, biosciences and non destructive testing. The modern OCT technology for ophthalmology relies on spectral (Fourier)-domain OCT. I will introduce an OCT method that radically changes the operation of such technology, where the Fourier transform or equivalent is replaced by multiple electrical processing, with a processor for each optical path difference (OPD) in the sample investigated [2]. This opens opportunities to parallel processing, especially useful for ultra fast tuning lasers in swept source OCT configurations. To this end, I will present recent research on two technologies for ultra fast tuning lasers for fast acquisition of OCT data: dispersive cavity with dual resonanc and time stretch configurations. These are akinetic solutions that promise to extend the sweeping rate of the optical frequency into the multi MHz range.

Keywords: optical coherence tomography, swept sources, broadband sources, 3D imaging, depth resolved imaging

Acknowledgements: The author acknowledges the support of the Marie Curie Training ITN NETLAS-860807, of the Biotechnology and Biological Sciences Research Council (BBSRC) (5DHiResE project, grant number BB/S016643/1) and the National Institute for Health Research (NIHR) Biomedical Research Centre at the UCL Institute of Ophthalmology and Moorfields Eye Hospital NHS Foundation Trust/Grant BRC03, as well as the Royal Society Wolfson Research merit award.

References:

- [1] A. Gh. Podoleanu, Optical coherence tomography, *Journal of Microscopy*, 247 (3) 209-219, (2012), 1.
DOI: 10.1111/j.1365-2818.2012.03619.x
- [2] A. Gh. Podoleanu, A. Bradu, Master–slave interferometry for parallel spectral domain interferometry sensing and versatile 3D optical coherence tomography, *Opt. Express* 21, 19324-19338 (2013),
<http://dx.doi.org/10.1364/OE.21.019324>.

The role of the laser technologies on the fabrication of organ-on-a-chip devices.

Maria Teresa Flores-Arias

Universidade de Santiago de Compostela, Facultade de Física, Instituto de Mateirais (iMATUS), Campus Vida, 15782 Santiago de Compostela, Spain

maite.flores@usc.es

Abstract. Organ-on-a-chip devices play an important role in preclinical studies to study several diseases in controlled laboratory in-vitro conditions that mimic the characteristic of the real situations, reducing the animal experimentation [1]. The capability of fabrication such a device plays an important role in the understanding of different pathologies. These devices need to be biocompatible, so it is mandatory to take attention on the material used as well as its roughness [2]. Laser technologies have emerged in the last decades as a very powerful tool for fabricating different devices. Their versatility to fabricate accurately devices in a wide range of dimensions, the speed of the process as well as the non-contact nature and the non-contaminant properties of the process, have made stand out laser writing among other techniques. This work presents the potential to fabricate preclinical devices in particular, vessels-like in vitro models with lasers working in pulsed regimes. According to the parameters and the pulse regime of the laser used, we will provide devices with different features (see figure 1).

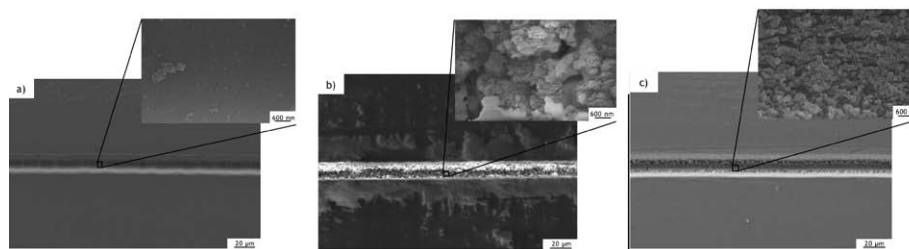


Figure 1. SEM images of a simple channel fabricated with a) nanosecond; b) picosecond and c) femtosecond pulsed laser. Enlarged view show the roughness of the bottom of the channels.

Keywords: pulsed lasers, microfluidic, organ-on-a-chip, preclinical studies, laser ablation

Acknowledgements: It has been partially supported by “Agencia Estatal de Investigación, Ministerio de Economía y Competitividad” (Spain) under contract RTI2018-097063-B-100 and the Consellería de Educación Xunta de Galicia/FEDER (ED431B 2020/29 UE)

References:

- [1] Y. Temiz, R. D. Lovchik, G. V. Kaigala, and E. Delamarche, “Lab-on-a-chip devices: How to close and plug the lab?,” *Microelectron. Eng.* 132, 156-175 (2015).
- [2] Ross A M, Jiang Z, Bastmeyer M and Lahann J 2012 *Small* 8 336-55

A touch of symmetry: High-harmonic generation from low-dimensional crystals.

Luis Plaja

Grupo de Investigación en Aplicaciones del Láser y Fotónica, Departamento de Física Aplicada, Universidad de Salamanca, E-37008, Salamanca, Spain

lplaja@usal.es

Abstract. The advent of intense laser sources a few decades ago triggered an intense research on non-perturbative laser-light interactions. One of the most spectacular developments in the field is the discovery of high-harmonic generation (HHG), stemming from the extreme nonlinear interaction. Until recently, HHG has been mainly studied in atomic, molecular gases and plasmas. The experimental demonstration a decade ago of HHG in solids [1] sparked the interest in the study of the non-perturbative optical phenomena in crystalline solids. Due to their higher electron density, an obvious advantage of solids is the increased efficiency of the process. However, damage thresholds are lower and, therefore, limit the maximum intensity of the driving. This situation is partially amended with the use of mid-infrared drivers that, on one side reduce the intraband carrier excitation and, on the other, introduce higher ponderomotive energies, therefore entering the strong-field regime with lower intensities. One interesting aspect in HHG from crystalline targets is to study the consequences of the crystal symmetries. In this sense, low dimensional crystals offer an extraordinary scenario, as their narrow widths (typically of atomic size) exclude propagation phenomena that may obscure relevant phenomena. In this talk we shall focus on HHG characteristics derived from the crystal-periodic nature of the targets: the translation of well-known coherent optics phenomena, as the Talbot interference, to the nanoscopic ultrasfast realm [2], and the consequences of the recently studied optical nonlinear anisotropy in graphene [3,4], for the generation of structured harmonic light driven with optical vector beams.

Keywords: High-order harmonic generation, solids, Talbot, structured light, graphene.

Acknowledgements: Ministerio de Ciencia, Innovación y Universidades (PID2019-106910GB-I00), Ramón y Cajal Program (RYC-2017-22745); Junta de Castilla y León (SA287P18); Ministerio de Educación, Cultura y Deporte (FPU18/03348). We acknowledge support from the European Research Council (ERC) under the EU Horizon 2020 research and innovation programme (grant No. 851201).

References:

- [1] Ghimire, S., Reis, D.A. High-harmonic generation from solids. *Nature Phys* 15, 10–16 (2019). <https://doi.org/10.1038/s41567-018-0315-5>
- [2] A. García-Cabrera, C. Hernández-García, and L. Plaja, “Ultrafast sub-nanometer matter-wave temporal talbot effect,” *New J. Phys.* 23, 093011 (2021).
- [3] O. Zurrón-Cifuentes, R. Boyero-García, C. Hernández-García, A. Picón, and L. Plaja, “Optical anisotropy of non-perturbative high-order harmonic generation in gapless graphene,” *Opt. Exp.* 27, 7776–7786 (2019).
- [4] N. Yoshikawa, T. Tamaya, and K. Tanaka, “High-harmonic generation in graphene enhanced by elliptically polarized light excitation,” *Science* 356, 736–738 (2017).

Towards 5-cycle, multi-mJ-level mid-IR capability at the L2I

Joana Alves ^{1,*}, Hugo Pires ¹, Celso P. João ^{1,2}, and Gonçalo Figueira ¹

¹ Group of Lasers and Plasmas (GoLP), Instituto de Plasmas e Fusão Nuclear (IPFN), Instituto Superior Técnico, Universidade de Lisboa, Av. Rovisco Pais, 1049-001 Lisbon, Portugal

² LaserLeap Technologies, Rua Coronel Júlio Veiga Simão, CTCV, Edifício B, 3025-307 Coimbra, Portugal

* joanacasanova@tecnico.ulisboa.pt

Abstract. Ultrafast and broadband laser sources in the mid-IR spectral domain (2–10 μm) have become highly sought after in the last decade [1]. The interest in these sources is greatly due to the scaling dependence of the ponderomotive potential with $\sim\lambda^2$, evidencing the extension of the cut-off photon energy with the increase in the driving wavelength [2]. Most of the current mid-IR sources in this wavelength range operate at high (50–100 kHz or above) repetition rates and high stability. Although these characteristics are ideal for the research of processes with low cross-sections, energies below the mJ-level are not optimal for driving low-efficiency processes, such as soft X-ray high harmonic generation and for efficient laser wakefield acceleration, making the scaling in the energy of the mid-IR pulses a highly promising and rewarding challenge. Scaling of the ~ 50 μJ , ~ 50 fs, $\sim\text{GW}$ output pulses typically provided by the systems in the first group above by almost 2 orders of magnitude is not trivial. The most efficient approach is through an optical parametric chirped-pulse amplifier (OPCPA) and the use of an energetic pump source synchronized with the seed. In this work, we show the design of a 3 μm ultrafast OPCPA with 5-optical-cycles and 5-mJ capability being implemented at the L2I. This system is pumped by a Yb:YAG multipass amplifier with sub-picosecond Fourier transform-limited (FTL) duration and 100 mJ output energy [3]. This configuration is supported by previously performed numerical amplification and compression studies [4]. Here we address the critical steps for the successful implementation of the system and the main challenges for high-energy few-cycle 3 μm amplification and compression.

Keywords: Mid-Infrared; Ultrafast Lasers; Parametric Amplification; Nonlinear Optics; Materials.

Acknowledgements: This project has received funding from Fundação para a Ciência e Tecnologia under grant PD/BD/135177/2017 and Laserlab Portugal (National Roadmap of Research Infrastructures, PINFRA/22124/2016); European Union's Horizon 2020 research and innovation programme under grant agreement no. 871124 (Laserlab-Europe); it is carried out in the framework of the Advanced Program in Plasma Science and Engineering (sponsored by Fundação para a Ciência e Tecnologia under grant No. PD/00505/2012) at Instituto Superior Técnico.

References:

- [1] K. Tian, et al. "Mid-infrared few-cycle pulse generation and amplification". *Photonics* **8** 8(2021)
- [2] T. Popmintchev, et al. "Bright coherent ultrahigh harmonics in the keV X-ray regime from mid-infrared femtosecond lasers". *Science* **336** 6086 (2012)
- [3] C. P. João, et al. "High-Peak Power Diode-Pumped Picosecond Yb-based Laser for OPCPA Pumping," in *Laser Congress 2019 (ASSL, LAC, LS&C)*, OSA Technical Digest (Optica Publishing Group, 2019)
- [4] J. Alves, et al. "Multi-mJ scaling of 5-optical cycle, 3 μm OPCPA". *Photonics* **8** 11(2021)

Scanning the flying focus of a tabletop vortex EUV beam

P.Estrela^{1*}, E. Maçôas², J.L. Figueiredo¹, G. Williams¹, M.Fajardo¹

¹ GoLP/Instituto de Plasmas e Fusão Nuclear, Instituto Superior Técnico, Universidade de Lisboa, Lisbon, Portugal

²Centro de Química Estrutural (CQE) and Institute of Molecular Sciences (IMS), Lisbon, Portugal

*patricia.estrela@tecnico.ulisboa.pt

Abstract. The ability to control the properties of light beams has enabled the appearance of multiple technologies. In recent years the study of the manipulation of orbital angular momentum (OAM) of light has been an exciting topic of research. There are many promising applications in various fields using different light wavelengths from visible to x-rays, and even promising applications in plasma accelerators [1].

In the particular case of extreme ultraviolet (EUV) light, one of the most promising applications is the generation of skyrmionic defects, which have been proposed for future magnetic memory devices [2]. Among the many different EUV sources available, high harmonic generation (HHG) in gases is an accessible, tabletop way to generate coherent EUV light with attosecond resolution.

In this work, we obtained high spatial resolution images of OAMs induced in a HHG EUV beam by using Spiral Zone Plates (SZP) [3] of different angular momentum - l. We scanned the beam near the focus of each one of the generated harmonics and recorded each beam profile with a lithium fluoride (LiF) crystal, a well characterised x-ray and EUV detector [4].

Keywords: Spiral Zone Plates, EUV optics, Orbital Angular Momentum, High Harmonics Generation

References:

- [1] J. Vieira, J.T. Mendonça, and F. Quéré Phys. Rev. Lett. 121, 054801, 2018
- [2] H. Fujita and M. Sato Phys. Rev. B 95, 054421
- [3] A.Sakdinawat and Y. Liu, Opt. Lett. 32, 2635-2637 (2007)
- [4] P. Estrela, E. Maçôas, G. Williams, M. Hussain, and M.Fajardo, J. Opt. Soc. Am. B 38, 2234-2238 (2021)

Various routes for VIS-to-UVC upconverted emission enhancement in lanthanide-doped nanoparticles

**Patryk Falat^{1*}, Min Ying Tsang¹, Szymon Zelewski², Dominika Wawrzyńczyk¹,
Marcin Nyk¹**

¹Institute of Advanced Materials, Faculty of Chemistry, Wrocław University of Science and Technology, Wybrzeże Wyspiańskiego 27, 50-370 Wrocław, Poland

²Department of Semiconductor Materials Engineering, Faculty of Fundamental Problems of Technology, Wrocław University of Science and Technology, Wybrzeże Wyspiańskiego 27, 50-370 Wrocław, Poland

* patryk.falat@pwr.edu.pl

Up-conversion is an anti-Stokes optical process of a few low-energy photons sequential absorption resulting in one high-energy photon emission, which was reported for the first time by F. Auzel in 1966 in Yb³⁺,Er³⁺-doped phosphate glasses. [1] After that, the possibility of efficient generation of upconverted emission has been widely investigated for various host matrices doped with lanthanides, since they are renowned for their rich energy level structure, allowing to generate radiation at any desired wavelength. [2] The process gained particular interest as the first upconverting nanostructures emerged in the late 1990s, which was a turning point for *in situ* light generation in prospective biomedical applications, e.g. antimicrobial inactivation or cancer treatment. [3]

Known for its invaluable germicidal properties, UV radiation (100-380 nm) can be induced *via* upconversion process in Tm³⁺, Gd³⁺ or Pr³⁺-ions doped nanomaterials. It is possible to be done in two ways, either upon visible radiation excitation, or upon energy transfer from sensitizer ions (e.g. Yb³⁺ or Nd³⁺) excited with NIR photons to the UV emitting lanthanide ion. [4] However, the efficiency of both processes is relatively low. [5] Therefore, in our work we decided to investigate several routes for enhancing UV emission generated within alkaline-earth yttrium fluoride nanoparticles *via* upconversion process. The experimental part is focused on nanoparticles co-doped with transition metal ions (Fe³⁺, Mn²⁺) and various core-shell nanoarchitectures. The data gathered in the study are highly significant for development of efficient UV emitting nanoparticles for bio-related applications.

Keywords: lanthanides, nanoparticles, UVC radiation, upconversion

Acknowledgements: This work was supported by the National Science Centre Poland under SHENG research grant (no. 2018/30/Q/ST5/00634).

References:

- [1] Auzel F. *J Lumin.* 223 (2020) article no 116900.
- [2] Blasse B.C.G.G. *Luminescent Materials*, Springer Verlag, Berlin (1994).
- [3] Zhang Z. *et al. ACS Materials Lett.* 2(11) (2020) 1516-1531
- [4] Liu Y. *et al. Nanoscale* 14(12) (2022) 4595-4601.
- [5] Cates E.L. *et al. Environ. Sci. Technol.* 45 (2011) 3680-3686.

Plasmonic/magnetic liposomes based on nanoparticles with multicore-shell architecture for chemo/thermotherapy

Ana Rita O. Rodrigues, Fábio A. C. Lopes, André V. F. Fernandes,
Elisabete M. S. Castanheira and Paulo J. G. Coutinho

Physics Centre of Minho and Porto Universities (CF-UM-UP) and LaPMET Associate
Laboratory, University of Minho, Campus of Gualtar, 4710-057 Braga, Portugal

ritarodrigues@fisica.uminho.pt

Abstract. Multifunctional liposomes containing magnetic and plasmonic nanoparticles (magnetic/plasmonic liposomes) are promising nanosystems for cancer therapy. Their structural and physical properties enable a synergistic effect between dual hyperthermia (magneto-photothermia) and local chemotherapy, allowing overheating of cancer cells while increasing drug toxicity [1,2].

In this work, multicore magnetic nanoparticles (NPs) of manganese ferrite were prepared using carboxymethyl-dextran and melamine as agglutinating agents. The NPs prepared exhibit a flower-shape structure and good capabilities for magnetic hyperthermia. Magnetoliposome-like structures containing the multicore NPs exhibit sizes in the range 250 – 400 nm, being suitable for biomedical applications. A new antitumor thienopyridine derivative was loaded in these nanocarriers with a high encapsulation efficiency. The stability of the nanosystem was confirmed, pointing to suitable characteristics of the magnetoliposomes for dual cancer therapy (combined hyperthermia and chemotherapy).

Keywords: magnetic nanoparticles, plasmonic nanoparticles, multicore-shell nanostructures, magnetic hyperthermia, combination therapy

Acknowledgements: FCT under Strategic funding of CF-UM-UP (UIDB/04650/2020).

References:

- [1] Rodrigues, A.R.O., Matos, J.O.G., Dias, A.M., Almeida, B.G., Pires, A., Pereira, A.M., Araújo, J.P., Queiroz, M.-J.R.P., Castanheira, E.M.S., Coutinho, P.J.G. (2019). Development of Multifunctional Liposomes Containing Magnetic/Plasmonic $MnFe_2O_4/Au$ Core/Shell Nanoparticles. *Pharmaceutics* 11(1), 10. DOI: 10.3390/pharmaceutics11010010
- [2] Rio, I.R.S., Rodrigues, A.R.R., Rodrigues, J.M., Queiroz, M.J.R.P., Calheta, R.C., Ferreira, I.C.F.R., Almeida, B.G., Pires, A., Pereira, A.M., Araújo, J.P., Castanheira, E.M.S., Coutinho, P.J.G. (2021). Magnetoliposomes Based on Magnetic/Plasmonic Nanoparticles Loaded with Tricyclic Lactones for Combined Cancer Therapy. *Pharmaceutics* 13(11), 1905. DOI: 10.3390/pharmaceutics13111905

Manganese ferrite nanoparticle clusters covered with gold nanorods for application in cancer phototherapy

Irina S. R. Rio¹, Elisabete M. S. Castanheira^{1,2}, Paulo J. G. Coutinho^{1,2}

¹ Physics Centre of Minho and Porto Universities (CF-UM-UP), University of Minho, Campus de Gualtar, 4710-057 Braga, Portugal;

² LaPMET—Laboratory of Physics for Materials and Emergent Technologies, University of Minho, 4710-057 Braga, Portugal

irinasoraia2007@hotmail.com

Abstract. Recently, hybrid nanosystems combining various materials (organic and inorganic) have been developed for the treatment and/or diagnosis of cancer. Among these, photothermal agents have attracted much attention [1]. They can be used in cancer therapy by converting light into heat under NIR laser irradiation, resulting in thermal destruction of cancer cells at tumor sites. Magnetic nanoparticles (MNPs) are also promising agents for cancer therapy, allowing magnetic hyperthermia. Among these, manganese ferrite nanoparticles (MnFe_2O_4) stand out for their biocompatibility and magnetic properties when compared to other types of MNPs (e.g. cobalt ferrite, magnetite and nickel ferrite) [2].

Magnetic clusters (MCs) of MnFe_2O_4 , when surface-functionalized, were shown to be stable against aggregation in model biological fluids and are thus prospective materials for biomedical applications. Further, MCs are known to have better magnetic hyperthermia performance than isolated MNPs [3].

In this work, MnFe_2O_4 nanoparticles were synthesized by thermal decomposition. Clusters of these nanoparticles were obtained and covered with gold nanorods. The photothermal capacity of these two types of materials was evaluated separately and for the magnetic/plasmonic nanosystems, aiming to explore in future the synergistic effect between magnetic hyperthermia and photothermia in cancer therapy.

Keywords: magnetic nanoparticles, gold nanorods, clusters, phototherapy, cancer treatment

Acknowledgements: This work was supported by the Portuguese Foundation for Science and Technology (FCT) in the framework of the Strategic Funding of CF-UM-UP (UID/04650/2020). I.S.R. Rio acknowledges FCT for a PhD grant 2020.04431.BD.

References:

- [1] Liao, S.; Yue, W.; Cai, S.; Tang, Q.; Lu, W.; Huang, L.; Qi, T.; Liao, J. (2021). *Front. Pharmacol.*, 22 April 2021; <https://doi.org/10.3389/fphar.2021.664123>
- [2] Akhlaghi, N.; Najafpour-Darzi, G. (2021). *Journal of Industrial and Engineering Chemistry*, 103, 292–304; <https://doi.org/10.1016/j.jiec.2021.07.043>
- [3] Lartigue, L.; Hugounenq, P.; Alloyeau, D.; Clarke, S.P.; Lévy, M.; Bacri, J.C.; Bazzi, R.; Brougham, D.F.; Wilhelm, C.; Gazeau, F. (2012). *ACS Nano* 6, 10935-10949; <https://doi.org/10.1021/nn304477s>

Fiber optic sensor for real-time monitoring of cryosurgery depth

^a I.D. Bassukas, ^b S. Oikiadi, N. Kourkoumelis, ^c A. Ikiades ^{a,*}

^a Physics Department, University of Ioannina, 45110 Ioannina, Greece

^b Department of Skin & Venereal Diseases, University of Ioannina,
45110 Ioannina, Greece

^c Department of Medical Physics, University of Ioannina, 45110 Ioannina, 45110
Ioannina, Greece, ^d Biology department, University of Crete, Heraklion Greece

* ikiadis@uoi.gr

Abstract. We present a new technique for measuring the depth of freezing/thawing during cryosurgery using optical diffusion as well as spectral analysis with a fiber optic sensor array. By calibrating frozen/unfrozen tissue in ex vivo porcine skin, the depth of freezing can be determined to be within 0.1mm. In addition, the technique was used in preliminary in vivo human skin, to determine spectral variations of living tissue during cryotherapy.

References:

- [1] M. Toner, E. G. Cravalho and M. Karel, "Thermodynamics and Kinetics of Intracellular Ice Formation during Freezing of Biological Cells," *J Appl Phys* 67(3), 1582-1593 (1990)
- [2] N. E. Hoffmann and J. C. Bischof, "The cryobiology of cryosurgical injury," *Urology* 60(2A), 40-49 (2002)
- [3] G. Gaitanis, K. Nomikos, E. Vava, E. C. Alexopoulos and I. D. Bassukas, "Immunocryosurgery for basal cell carcinoma: results of a pilot, prospective, open-label study of cryosurgery during continued imiquimod application," *J Eur Acad Dermatol* 23(12), 1427-1431 (2009)
- [4] G. Lipp, C. Körber, S. Englich, U. Hartmann and G. Rau, "Investigation of the behavior of dissolved gases during freezing," *Cryobiology* 24(6), 489-503 (1987)

Pressure and Angle Sensors with Optical Fiber for Instrumentation of the PrHand Hand Prosthesis

Laura De Arco¹, Maria J. Pontes¹, Marcelo E. V. Segatto¹, Maxwell E. Monteiro²,
Carlos A. Cifuentes^{3,4}, Camilo A. R. Díaz¹

¹Telecommunications Laboratory (LabTel), Electrical Engineering Department, Federal University of Espírito Santo, Fernando Ferrari avenue, 29075-910 Vitória-ES, Brazil.

²Federal Institute of Espírito Santo (IFES), 29166-630, Serra-ES, Brazil.

³School of Engineering, Science and Technology, Rosario University, Bogota, Colombia.

⁴C. A. Cifuentes is with the Bristol Robotics Laboratory, the University of the West of England, Bristol, UK.

laura.barraza@edu.ufes.br

Abstract. The principal cause of upper limb amputations is related to traumatism (77%), followed by congenital disorders (8,9%), cancer (8,2%), and vascular diseases (5,8%); the last 0,1% is by unknowledge causes. The prosthesis is an assistive device to help in the activities of daily for the amputee person. However, one of the latest reports shows that in developing countries there are around 30 million people without assistive devices. The PrHand is a hand prosthesis based on soft robotics and complaint mechanisms. It has elastics joints that make fingers extend with an internal elastic tendon, and the finger flexion is performed by one servomotor. The fingers are based on a complaint mechanism that allows having the degrees of freedom (DOF) of flexion, extension, abduction, and adduction; for the two last ones, aircontrolled silicone actuators are used. Additionally, the prosthesis is underacted because it can control up to 15 DOF with one motor and one pump air. This work presents the development of two kinds of sensors for the PrHand prosthesis instrumentation. The sensors are made with polymeric optical fiber (POF), due to its flexibility and low cost, and the working principle is based on intensity variation. The curvature deformations in the fiber and the pressure are going to be represented as voltage changes. The angle sensors are anchored on the fingers and are used for monitoring the interphalangeal joint. For the assessment six opening and closing cycles were made per finger. For the voltage lecture was used a microcontroller and for the measurement of the angle the Kinovea software was used. Regarding force sensors, they are located at the tip of each finger, and for the evaluation was used a compression device that controls the force. As reference was used a strain gauge sensor and the data was taken each 0.5 kg from 0 to 3 kg, considering that in a mechanical study made over the prosthesis 3 kg is the maximum force that the prosthesis can make over an object. For the results were taken the characteristics curves of the sensors, and both show a linear behavior, one most remarkable angle sensor result was with an R^2 of 0,99 and a sensibility of 0,0357 V/° closing and 0,0483 V/° opening. On the other hand, for the force sensor, the most notable result has an R^2 of 0,98, its sensibility was 0,0361 V/N pushing and 0,0368 V/N pulling. In conclusion, was successfully developed two kinds of sensors for the instrumentation of PrHand prosthesis. It is expected to use these variables with algorithms of Machine Learning to improve the detection of objects. One aspect to improve is to control in a better way the sensor construction parameters due to the big influence over the sensor behavior.

Development of tissue-mimicking phantoms for jaundice assessment device validation

F. Crivellaro^{1*}, A. Costa², P. Vieira¹

¹ Department of Physics, NOVA School of Science and Technology, Universidade Nova de Lisboa, Almada, Portugal

² Department of Pediatrics, Hospital Garcia de Orta, EPE, Almada, Portugal

* f.crivellaro@fct.unl.pt

Abstract. The increasing of vital signs continuous monitoring, optically harvested from the skin, have been driven by the wearable devices expansion and the healthcare smart mobile evolution. The context of social restrictions of recently pandemic world scenarios [1] or even the acute hepatitis outbreak, are situations where optical non-invasive skin sensors can play a very important role, improving health services access, efficiency and quality. One important application is the jaundice level assessment in newborn babies. They are routinely monitored for at least for 48h after birth due to the possibility of evolution to critical encephalopathies. For this case, non-invasive optical hand-held sensors called transcutaneous bilirubinometers are commonly used for baby screening [2].

The research and development of these sensors must be supported by tissue-mimicking phantoms, for validation, optimization, calibration, stability and quantitative studies. In the case of human skin, the main chromophores in the optical visible range are melanin, haemoglobin and bilirubin, with specific absorption characteristics. For example, the skin tones are related to variations on the melanin concentration at epidermis, as well as distinct jaundice levels are associated with bilirubin concentration on dermis and subcutaneous tissue. Therefore, reflectance measurements from optoelectronic devices, as the bilirubinometers, can be validated or calibrated by a set of phantoms corresponding to a representative and diverse skin group.

In this work, in order to allow the calibration and validation of optical devices over real sensing situations, there were developed phantoms for 3 skin tones: light, medium and dark. The melanin chromophore was mimicked by managing nigrosin and Intralipid concentration in an agarose substrate. For each skin tone category there were reproduced 4 distinct jaundice levels through the management of bilirubin concentration. The phantoms were evaluated in the visible spectrum through reflectance spectroscopy and compared to different skin databases. The obtained results confirm the qualification of the phantoms for performance analysis of optical reflectance based devices towards jaundice level assessment.

Keywords: Skin, Bilirubin, Melanin, Phantom, Reflectance

Acknowledgements: This research leading to this result has received funding from Fundação para a Ciência e a Tecnologia (FCT) under grant PD/BDE/142935/2018.

References:

- [1] Xiao-Lu Ma et al. (2020). Management strategies of neonatal jaundice during the coronavirus disease 2019 outbreak. *World Journal of Pediatrics*, 16:247-250.
- [2] Green J., Petty J., Bromley P. et al. (2020). COVID-19 in babies: Knowledge for neonatal care. *Journal of Neonatal Nursing*, 26 (5), pp.239-246.

Atmospheric Dispersion Correction for High-Resolution Spectrographs: Past, Present, and Future

Wehbe, B.¹, Cabral, A.^{1,2}

¹Instituto de Astrofísica e Ciências do Espaço, Universidade de Lisboa, Faculdade de Ciências, Campo Grande, PT1749-016 Lisboa, Portugal

²Departamento de Física, Faculdade de Ciências, Universidade de Lisboa, Campo Grande 1749-016 Lisboa Portugal

bachar.wehbe@astro.up.pt

Abstract. Astronomical observations with ground-based telescopes are affected by differential atmospheric dispersion, a consequence of the wavelength-dependent index of refraction of the atmosphere. In high-resolution astronomical instruments, an Atmospheric Dispersion Corrector (ADC) is mandatory to avoid wavelength-dependent losses. The recent developments in the field of Adaptive Optics (AO) systems, improving considerably the performance of telescope resolution, and the arrival of large telescopes with diameters up to 40 m, reinforce the need to revisit the way differential atmospheric dispersion is corrected and how it influences the performance of high-resolution spectrographs. To reach the top-level specifications in the new state-of-the-art astronomical instruments, it is crucial to tackle all the instrumentation-related challenges, in particular the ones related to atmospheric dispersion. The main requirements for an atmospheric dispersion corrector are to perform variable counter dispersion to compensate for that of the atmosphere at a given zenithal angle and to produce zero deviation at a reference wavelength, within the range of interest for all zenithal angles. In this paper, we will highlight the past, and focus on the present, and future of atmospheric dispersion correction mainly driven by the scientific and technical requirements.

Keywords: atmospheric dispersion correctors; atmospheric optics; dispersion; spectrographs

Comparison between the scanning pentaprism and the Hartman method for wavefront analysis

Nuno, M. Gonçalves, Manuel Abreu, D. Castro Alves

Instituto de Astrofísica e Ciências do Espaço, Universidade de Lisboa, Campo Grande,
PT1749-016 Lisboa, Portugal

Departamento de Física, Faculdade de Ciências, Universidade de Lisboa, Edifício C8,
Campo Grande, PT1749-016 Lisbon, Portugal

nmgoncalves@fc.ul.pt

Abstract. Techniques for wavefront measurement have many applications as optics systems for astronomy and also as verification tests for optical surfaces. The development of large aperture optical systems drives the search for low cost and high-resolution wavefront detection sensors. The Hartman sensor and its variations (i.e the Shack-Hartman sensor) are the current standards for the characterization of low-frequency optical aberrations, such as defocus and spherical.

The scanning pentaprism method is presented as a simple and low-cost method for the verification of such aberrations. In this method, a transverse slice of a wavefront is scanned and separated into a series of sub-wavefronts with smaller apertures. The relative positions of the produced centroids are measured relative to a calibrated position. This allows for the determination of the optical path difference along the slice and consequently the wavefront error. Both techniques were used as tools for collimating a telescope that is part of the on- ground support equipment of ESA PLATO mission. In this work, the results from both methodologies are compared.

Keywords: wavefront, Hartman sensor, scanning pentaprism, PLATO

Acknowledgements: This work was supported by Fundação para a Ciência e a Tecnologia (FCT) through the research grants 2021.05307.BD.

Imaging sensors for spacially resolved solar spectroscopy instrument

I Leite^{* 1,2}, A Cabral^{1,2}, M Abreu^{1,2}

¹Instituto de Astrofísica e Ciências do Espaço, Universidade de Lisboa, Portugal

²Departamento de Física, Faculdade de Ciências, Universidade de Lisboa, Portugal

* imleite@fc.ul.pt

Abstract. The study of the Sun is an area still open in several topics of astrophysics, in a field that has seen an expansion in recent years – therefore, it is critical that collected data is thoroughly traceable and accurate to be used in new study cases or predictive models. A ground-based, portable, optimized system, consisting of a Schmidt-Cassegrain telescope coupled to a refractor telescope acting as a pointing telescope, is being designed to provide high resolution imaging of smaller areas on the Sun's surface, being able to obtain disk-resolved, high spectral resolution data, at a relative low cost (compared to large consortium developed instruments^{[1][2]}). The light collected by the telescope will be fibre-fed to a spectrograph – the injection of light in the fibre is critical and requires an imaging sensor to aid the light guiding process. The goal of the present work was to explore the best candidates for the image sensors, their architectures, requirements, and constraints, as well as their expected performance range and signal noise – the distinction between CMOS and CCD based sensors was also made.

Keywords: instrumentation, sun, telescope, solar observations, solar spectroscopy

Acknowledgements: The authors would like to thank Instituto de Astrofísica e Ciências do Espaço (IA) and the Fundação para a Ciência e Tecnologia (FCT, Portugal) that supported the work through the research grant: UI/BD/152077/2021

References:

- [1] “European solar telescope,” EST. [Online]. Available: <https://est-east.eu/>. [Accessed: 03-Jun-2022].
- [2] Changhui Rao, Naiting Gu, Lei Zhu, Jinlong Huang, Cheng Li, Yuntao Cheng, Yangyi Liu, Xuedong Cao, Ming Zhang, Lanqiang Zhang, Hong Liu, Yongjian Wan, Hao Xian, Wenli Ma, Hua Bao, Xiaojun Zhang, Chunlin Guan, Donghong Chen, and Mei Li “1.8-m solar telescope in China: Chinese Large Solar Telescope,” *Journal of Astronomical Telescopes, Instruments, and Systems* 1(2), 024001 (24 February 2015). <https://doi.org/10.1117/1.JATIS.1.2.024001>

Characterization of Light Diffraction by a Digital Micromirror Device

C Pereira^{* 1, 2}, M Abreu^{1, 2}, A Cabral^{1, 2}, J M Rebordão^{1, 2}

¹Instituto de Astrofísica e Ciências do Espaço, Universidade de Lisboa, Portugal

²Departamento de Física, Faculdade de Ciências, Universidade de Lisboa, Portugal

* cppereira@fc.ul.pt

Abstract. A Digital Micromirror Device (DMD) is a technology developed by Texas Instruments, that consists in a two-dimensional array of micromirrors, which can be individually tilted between two positions. It has been used as a digital video and image processing solution, commonly found in Digital Light Processing (DLP) video projectors. Over the years, DMDs have become popular in different fields: industrial, automotive, medical, government and home user solutions. In the astronomy field, it has been also considered in on-ground space instrumentation and it has been proposed for the development of some astrophysical space instruments. In order to evaluate the actual impact of such device in the instrument optical design, it is important to know how the light behaves when it interacts with a DMD, namely in what regards to the diffraction process when a light beam is reflected by a periodic array of micromirrors. In this study we describe how we simulate the diffraction patterns produced by a periodic array of micromirrors, for coherent and incoherent sources of light. The results from simulations are verified against laboratory experiments, described also in this study.

Keywords: instrumentation, diffraction, digital micromirror device

Acknowledgements: The authors would like to thank Instituto de Astrofísica e Ciências do Espaço (IA) and the Fundação para a Ciência e Tecnologia (FCT, Portugal) that supported the work through the research grant:PD/BD/150443/2019.

Development of optical characterization and testing instrument for Sentinel-5 Earth Observation mission

J K Abrantes ^{1*}, J Mendes-Lopes¹, R Henriques¹, J Pimentão¹, J Meyer¹,
D Mesquita¹

¹Lusospace, Rua Sarmento de Beires 31A, Lisboa, Portugal

* jabras@lusospace.com

Abstract. This paper reports on the design, development and testing of optical ground support equipment (OGSE) for the assembly, integration and testing (AIT) activities, and for the calibration and characterization (C&C) activities of the Sentinel-5 Earth Observation instrument.

Three sets of AIT OGSE were developed, for the UV1, UV2VIS and NIR spectral ranges, with similar design concepts. Each AIT OGSE comprises two modules, assembled in a common mechanical base: ILL OGSE and ILL GSS OGSE. The ILL OGSE provides 7 point sources with divergence defined by rectangular masks and very strict telecentricity values, better than 1.5 arcmin for the ILL UV2VIS. The ILL GSS OGSE images the light of a pinhole onto two different image planes, providing an astigmatic optical beam with divergence also defined by a rectangular mask. In both OGSE, a laser is used as the light source. The light is transported through fibers from the source to the pinholes. A XYZ mechanism is used to align the AIT OGSE with the spatial and spectral object planes of the Sentinel-5 spectrograph.

A sun simulator (SUSI) as part of C&C OGSE of the Sentinel-5 instrument was also developed by LusoSpace. The sun simulator is based on a Xenon continuous light source, an homogenizer and a telescope. A Xenon arc plasma source is significantly non-uniform, both spectrally and spatially. To meet the stringent spatial homogeneity requirements, a large homogenizer based on a kaleidoscope configuration was designed and manufactured. The proper collimation and large exit pupil are achieved through a mirror-based Offner telescope, avoiding large incidence angles, which would affect spatial uniformity and polarization. SUSI covers a very wide spectral range, from 270 to 2385nm, with an irradiance of 80 mW/cm². SUSI provides an illuminated exit pupil with a very high spatial uniformity. The collimated beam of 0.318° divergence illuminates an exit pupil 151mm diameter with continuous light, and with a spatial non-uniformity better than 1% (according to IEC 60904-9 definition) which is, to the best of the authors' knowledge, the highest level of spatial uniformity for large aperture sun simulators [1].

The OGSEs were successfully tested and delivered. This work will focus on the development of the instruments, and the experimental results of the test campaigns.

Keywords: OGSE, Sentinel-5, Sun Simulator, AIT

References:

- [1] Mendes-Lopes J, Meyer J, Borges P, Pereira J, Henriques R, Pimentao J, Mesquita D 2021 Sentinel-5 OGSE: large aperture sun simulator *Proc. SPIE 11852, Int. Conf. on Space Optics — ICSO 2020* 118524E

Topological optical clusters

Humberto Michinel, Angel Paredes and Jose R. Salgueiro

Universidade de Vigo. Departamento de Física Aplicada. Campus de As Lagoas s/n
32004 Ourense, Spain.

hmichinel@uvigo.es

Abstract. In this work we present, for the first time to our knowledge, numerical evidence of the existence of static regular configurations of vortices[1] embedded in a uniform background. This type of structures can be formed in nonlinear media with self-repulsive interactions such as the so called cubic or Kerr type nonlinearity[2].

We start by showing mathematically how to construct rotating structures by using ansätze with a particular symmetry and we use regular n -polygons with the same centre, each of which with vortices of a particular topological charge on their vertices. Then, we find specific relations between their sizes and the aforementioned topological charges to fulfil a staticity condition. The analytical predictions will be verified with full numerical simulations of the propagation of different sets of initial conditions.

Our results will show that intricate phase interactions yield exotic distributions of the wavefront dislocations that remain stable for long evolutions, without changes in the amplitude profile of the field, which is therefore static, whereas a complex phase structure evolves as the beam propagates. We hypothesize that this surprising behaviour can be heuristically understood as a result of topological “forces” that arrange themselves in such a way that a complex structure is formed that supports itself by the phase gradient profile generated by the sum of all the vortices of the structure. If any of the vortices were removed, the entire structure would rapidly unravel.

Keywords: optical vortices, vortex solitons, cubic-quintic materials, nonlinear Schrödinger equations

Acknowledgements: Project PID2020-118613GB-I00, funded by MCIN/AEI/10.13039/501100011033

References:

- [1] D. Rozas, C. Law, and G. Swartzlander, JOSA B 14, 3054 (1997).
- [2] Y. S. Kivshar and B. Luther-Davies, Physics reports 298, 81 (1998).

Time-refraction and temporal optical processes

J.T. Mendonça

GoLP, IPFN, Instituto Superior Técnico, Universidade de Lisboa, Portugal

titomend@tecnico.ulisboa.pt

Abstract. The basic concepts of temporal optics are discussed. Temporal optics is mainly based on the process of time-refraction [1, 2], which complements the usual space-refraction of inhomogeneous media and leads to signal amplification, and to a variety of other optical processes. They include self-and cross-phase modulation, photon acceleration, pulse compression and generation of supercontinuum laser pulses [3]. They can also be used for temporal switching, temporal beam-splitters, and time crystals. Recent work on temporal optics in a Rydberg gas [4], and self-phase modulation using twisted laser pulses [5,6] is also discussed.

Keywords: Temporal optics, photon acceleration, self-phase modulation, supercontinuum

References:

- [1] J.T. Mendonça et al., Phys. Rev. A 62 (2000) 033805; Phys. Rev. A 68 (2003) 043801.
- [2] J.T. Mendonça (2001), Theory of Photon Acceleration, Institute of Physics Publ., Bristol.
- [3] R.R. Alfano and S.L. Shapiro, Phys. Rev. Lett. 24, (1970) 584; 1217.
- [4] J.T. Mendonça, J. Phys. B: At. Mol. Opt. Phys. 53 (2020) 164004
- [5] J.T. Mendonça, Europhys. Lett. 129 (2020) 64004.
- [6] J.T. Mendonça (2022), in R.R. Alfano ed., The Supercontinuum Laser Source, Ed., Springer, New York, 6th edition.

Model Hamiltonians of open quantum optical systems: Evolution from hermiticity to commutativity

Konstantin G. Zloshchastiev

Institute of Systems Science, Durban University of Technology, P.O. Box 1334,
Durban 4000, South Africa

kostya@u.nus.edu

Abstract. In the conventional quantum mechanics of conserved systems, Hamiltonian is assumed to be a Hermitian operator. However, when it comes to quantum systems in presence of dissipation and/or noise, including open quantum optical systems, the strict hermiticity requirement is no longer necessary. In fact, it can be substantially relaxed: the non-Hermitian part of a Hamiltonian is allowed, in order to account for effects of dissipative environment, whereas its Hermitian part would be describing subsystem's energy. Within the framework of the standard approach to dissipative phenomena based on a master equation for the reduced density operator, we study a possible replacement of the hermiticity condition by those based on commutation relations between Hermitian and anti-Hermitian parts of a Hamiltonian. As an example, we consider a dissipative two-mode quantum system coupled to a single-mode electromagnetic wave.

Keywords: quantum optical systems, non-Hermitian Hamiltonians, density operator, open quantum systems, two-level systems

Acknowledgements: This research is supported by the Department of Higher Education and Training of South Africa and in part by the National Research Foundation of South Africa (Grants Nos. 95965, 131604 and 132202).

References:

- [1] Feshbach H 1958 *Ann. Phys.* 5 357
- [2] Faisal F H M 1987 *Theory of Multiphoton Processes* (New York: Plenum Press)
- [3] Breuer H-P and Petruccione F 2002 *The Theory of Open Quantum Systems* (Oxford: Oxford University Press) UK
- [4] Sergi A and Zloshchastiev K G 2013 *Int. J. Mod. Phys. B* 27 1350163
- [5] Zloshchastiev K G and Sergi A 2014 *J. Mod. Optics* 61 1298
- [6] Zloshchastiev K G 2015 *Eur. Phys. J. D* 69 253

Investigation of cold atom turbulent dynamics through a spatially resolved pump-probe diagnostic.

R. Giampaoli¹, J.D. Rodrigues^{1,2}, J.A. Rodrigues^{1,3} and J.T. Mendonça¹

¹Instituto de Plasmas e Fusão Nuclear, Instituto Superior Técnico, Universidade de Lisboa, 1049-001 Lisboa, Portugal

²Physics Department, Blackett Laboratory, Imperial College London, Prince Consort Road, London SW7 2BZ, UK

³Departamento de Física, Faculdade de Ciências e Tecnologia, Universidade do Algarve, 8005-139 Gambelas, Faro, Portugal

ruggero.giampaoli@tecnico.ulisboa.pt

Abstract. Photon bubble turbulence is considered a key mechanism behind enhanced radiation transport in a variety of high energy objects such as accretion disks and massive stars. Analogous conditions – randomised photon propagation, strong radiation-pressure forces – exist in optically thick clouds of cold atoms. Through a novel spatially-resolved pump-probe diagnostic, integrated into a magneto-optical trap, we have been able to overcome line-of-sight integrated measurements and directly access the 2D density distribution across the atomic cloud. We have therefore identified a photon bubble instability and the resulting regime of photon bubble turbulence in cold atoms clouds.

Keywords: Photon Bubbles; Turbulence; Pump-Probe Diagnostics; Spatially resolved measurements; Cold atoms.

Acknowledgements: This work has received funding from the European Union’s Horizon 2020 Research and Innovation programme under grant agreement no. 820392 PhoQuS). R.G. acknowledges the Advanced Programme in Plasma Science and Engineering (APPLAuSE) and the financial support of FCT (Fundação para a Ciência e Tecnologia) through the Grant Number PD/BD/135211/2017.

Dots-in-Host Semiconductors for Improved Light Management

M. Alexandre*, H. Águas, E. Fortunato, R. Martins, M. J. Mendes

i3N/CENIMAT, Department of Materials Science, Faculty of Science and Technology,
Universidade NOVA de Lisboa and CEMOP/UNINOVA, Campus de Caparica, 2829-
516 Caparica, Portugal

* m.alexandre@campus.fct.unl.pt

Abstract. Insightful knowledge on quantum nanostructured materials is paramount to engineer and exploit their vast gamut of applications that range from optoelectronics to biology. In this work, a formalism based on the Empirical k.p method [1] was developed for rock-salt semiconductors (PbS, PbSe), to understand the absorption properties of colloidal quantum dots (CQDs) embedded in a wider bandgap semiconductor host. This method depends first on the development of a single-band effective mass model (developed previously in [2]) that can then be expanded into a 4-band model by using the 4-band k.p Hamiltonian for rock-salt materials. This method essentially calculates the envelope functions for the 4-band k.p basis from the diagonalized wavefunctions (determined from the 1-band model). These envelopes are then fundamental for further calculations, such as intra-band absorption. Several aspects of the model are then studied. Firstly, the CQD bandgaps that not only show a good agreement with the empirical results — determined by Moreels et. al. [3] — but also add the effect of host bandgap to the modelling scenario. Then the authors determined the envelope functions that can be used for calculating the absorption properties of the CQDs. Following this method, the authors calculated the transition rates and studied how they are influenced by the different CQD properties, using it then to determine the absorption coefficient density for the QD@Host system. To then understand the overall absorption behaviour with the different CQD properties the authors used a stochastic optimization algorithm (Particle Swarm) that can maximize a specified Figure of Merit (FoM) in a predefined parameter domain. Subsequently, a Monte Carlo analysis was performed around the maximum value to understand how significant is the impact of the parameter on the overall QD absorption.

References:

- [1] Luque et. al., Photon Absorption Models in Nanostructured Semiconductor Solar Cells and Devices, SpringerBriefs in Applied Sciences and Technologies, 2015
- [2] Alexandre et. al., Light Management with Quantum Nanostructured Dots-in-Host Semiconductors, Light Science & Applications, 2021
- [3] Moreels et. al., Size-Dependent Optical Properties of Colloidal PbS Quantum Dots, Acs Nano, 2009

Label-Free Multiparametric Analysis Using Photonic Crystal-Based Biosensors

Galina Nifontova¹, Fabrice Fleury², Igor Nabiev^{*}, and Alyona Sukhanova^{*}

¹ Laboratoire de Recherche en Nanosciences, LRN-EA4682, Université de Reims Champagne-Ardenne, 51100 Reims, France

² UFIP, UMR 6286 CNRS, Nantes Université, 44322 Nantes, France

* igor.nabiev@univ-reims.fr; alyona.sukhanova@univ-reims.fr

Abstract. Photonic crystals (PCs) as label-free multiparametric sensors have been demonstrated to be an effective alternative to widely used surface plasmon resonance (SPR) sensors for detection of biomolecule interactions in modern diagnostics and drug development [1, 2]. PCs are multilayer stacks of dielectrics with a periodic modulation of their refraction indices in the optical wavelength range [3]. PC-based sensors are characterized by a longer surface wave propagation resulting in better sensitivity compared to SPR-based ones [3]. Surface modification is an important stage in the engineering of biosensors that directly affects the efficacy of the analysis of biomolecule interaction. SPR-based sensors are usually coated with gold or silver; therefore, this procedure requires the use of thiol chemistry. Their surface cannot be completely regenerated, which limits their use and increases the cost of analysis. In contrast, the PC surface is chemically stable, can be fully regenerated, and allows using varying surface chemistries to deposit the desired functional groups onto the sensor for immobilization of analyte-binding moieties and subsequent oriented coupling of biomolecules to assemble bioanalytical complexes. In this study, we describe an approach to surface chemical modification and oriented functionalization of PC sensors using capture molecules (immunoglobulin- and biotin-binding proteins). We also present the results of label-free detection of protein analytes performed using a microfluidic PC-based sensor detecting PC surface modes. The obtained data demonstrate the possibility of label-free analysis of interactions of model proteins and pave the way to further engineering of a multipurpose biosensing platform based on PCs.

Keywords: protein sensing, label-free detection, photonic crystal, surface mode imaging, multiplexed detection

Acknowledgements: This research leading to this result has received funding from Fundação para a Ciência e a Tecnologia (FCT) under grant PD/BDE/142935/2018.

References:

- [1] Petrova I, Konopsky V, Nabiev I and Sukhanova A 2019 *Sci. Rep.* **9**8745.
- [2] Konopsky V and Alieva E 2018 *Sens. Actuators, B* **276**271-278.
- [3] Konopsky V, Mitko T, Aldarov K, Alieva E, Basmanov D, Moskalets A, Matveeva A, Morozova O and Klinov D 2020 *Biosens. Bioelectron.* **168**112575.

Study of the impact on the absorption of III-V semiconductor nanopillars coated with dielectric-metal shells

João Lourenço^{1,2,*}, José Figueiredo¹ and Bruno Romeira²

¹ Centra-Ciências and Departamento de Física, Faculdade de Ciências, Universidade de Lisboa, Lisboa, Portugal.

² INL – International Iberian Nanotechnology Laboratory, Ultrafast Bio and Nanophotonics Group, Braga, Portugal

* jplourenco@fc.ul.pt

Abstract. Nanopillar and nanowire III-V semiconductor photonic devices have garnered considerable attention in the past few years as possible key elements for enabling next-generation applications, such as nanowire array lasers, on-chip and intra-chip optical interconnects, surface plasmon photodetectors, optical to electrical nanowire converters, plasmonic-photonic meta-absorbers, metal cavity nanopillar light emitting diodes and metal cavity nanopillar photodetectors.

In this work we aim to provide a study on how the absorption spectrum of nanopillar III-V semiconductor devices is impacted by the devices' multiple structural parameters. Our baseline design comprises a layer stack GaAs/AlGaAs semiconductor nanopillar with a 400 nm diameter covered by 50 nm a metal (gold) shell with a 50 nm dielectric shell acting as an interface between semiconductor and metal. Using Lumerical's DEVICE simulation suite, our goal was to understand which parameters of the pillar bear more weight in the devices' absorption in the red and near-infrared (NIR) part of the spectrum (600-900 nm wavelengths) and respective changes in the absorption maxima and minima. In terms of variation of parameters, we first studied the impact in absence of dielectric and metal shells that surround the pillar. Then we assessed the impact of the nanopillar's diameter, the thickness of the dielectric shell and the impact of the material of the metal shell by substituting the gold in the original design by silver.

Several conclusions were drawn from this study, notably devices with smaller diameter showed that a suppression of absorption in the 700-750 nm region of the spectrum occurs. The overall absorption seems to also be very sensitive to the thickness of the dielectric that acts as an interface between the metal shell, as different maximums in the absorption spectrum appeared for different wavelengths as a function of the thickness. The studies presented here can have applications in the design of energy-efficient and compact nanopillar photodetectors.

Keywords: Nanopillar, FDTD, Photodetector, Photonics

Acknowledgements: European Commission (Grant No. 828841 659 ChipAI-H2020-FETOPEN-2018–2020), FCT Grant PD/BD/142830/2018

References:

- [1] P. Senanayake et al., "3D Nanopillar optical antenna photodetectors," *Opt. Express*, vol. 20, no. 23, Nov. 2012, doi: 10.1364/OE.20.025489.
- [2] H. Kim, H. Bae, T. Y. Chang, and D. L. Huffaker, "III-V nanowires on silicon (100) as plasmonic-photonic hybrid meta-absorber," *Sci. Rep.*, vol. 11, no. 1, p. 13813, 2021, doi: 10.1038/s41598-021-93398-z.

Synchronous and asynchronous 3D examination of the eye with a slit lamp

Antía Caamaño¹, Nery García-Porta¹, Justo Arines^{1,2}

¹Departamento de Física aplicada, Facultad de Óptica y Optometría, Campus Vida, Universidad de Santiago de Compostela, 15782 España

²Instituto de Materiais (iMATUS), Campus Vida, Universidad de Santiago de Compostela, 15782 España

justo.arines@usc.es

Abstract. Slit lamp is an essential instrument in any eye clinic practice, being routinely used by eye care practitioners during the ocular examination. The observation system of the slit lamp is composed by a binocular loupe providing 3D images during the ocular evaluation, which helps the identification and quantification of the progression of pathological signs. However, the registration of the images provided by the Slit Lamp continues to be in 2D, losing the additional information provided by 3D images. In this work we propose the use of 3D cameras attached to the eyepieces of the Slit Lamp to provide 3D videos that can be visualized synchronously or asynchronously by the practitioner or other colleague with which the video is shared. We compared the use of two different 3D cameras, one with the objectives separated a fixed distance, and another one whose objectives can be moved independently. Benefits and drawbacks of each camera will be presented. The visualization of the videos was tested on two different mobile phones of different screen sizes placed at two different 3D spectacles. Comparison of the 3D visualization of the videos will be presented making emphasis on the difficulty of binocular fusion. We will discuss the suitability of recording the slit lamp exploration with a 3D camera for synchronous and asynchronous remote exploration, promoting immersive tele-ophthalmology.

Keywords: 3D exploration, Slit Lamp, Optometry, Ophthalmology

Acknowledgements: This work has been funded by Ministerio de Ciencia e Innovación PID2020-115909RB-I00, and by Consellería de Cultura, Educación e Ordenación Universitaria, Xunta de Galicia (ED43B 2020/29). Nery Garcia-Porta is supported financially by a Maria Zambrano contract at USC under the grants call for the requalification of the Spanish university system 2021-2023, funded by the European Union—NextGenerationEU.

Teaching Optometry: setup for understanding the subjective refraction protocol and patient answers

Martina Rodríguez-López¹, Justo Arines^{1,2}

¹Departamento de Física aplicada, Facultad de Óptica y Optometría, Campus Vida, Universidad de Santiago de Compostela, 15782 España

²Instituto de Materiais (iMATUS), Campus Vida, Universidad de Santiago de Compostela, 15782 España

justo.arines@usc.es

Abstract. Subjective refraction is not easy. Sometimes it is referred as the art of refraction. Why? because the different steps involved in the subjective refraction exam generates different answers depending on the patient. Teachers provides a general framework with general rules indicating the student the appropriate moment of performing each step of the protocol. But students that follow exactly the protocol do not always arrive to the correct refractive error. This is because the protocol must be adjusted to the patient answers. But for doing this, students need to understand not only how to perform the protocol, but also to experience the different ways in which the optotypes can be seen depending on the kind and magnitude of the refractive error. As subjective refraction is guided by the subjective answers of the patient, examiners must be able to put on the shoes of the patient. And this can only be possible if they were able to see the optotypes with the same refraction errors as their patients. In this work we propose a new setup for practicing subjective refraction while experiencing the way in which patients see the optotypes. The setup comprises: one projector; one computer; one screen; a set of trial lenses; one holder for trial lenses. The projector is used to project on the screen the optotypes created in the computer with the corresponding size in accordance with the projection distance. Close to the objective of the projector, we placed the trial lens holder to hold the lenses used to create the spherocylindrical refractive error. Spherical error can also be generated with the objective of the projector. The distorted image, like the one that experience patients with the same refractive error, is projected on the screen. Then different trial lenses are interposed following the steps involved in the subjective refraction protocol. This setup allows the training of the refractive protocol and the visualization of the optotypes during each of the steps of subjective refraction. The projection on the screen allows the visualization of a complete class promoting the interchange of ideas and impressions on the identification of the optotypes. It allows also individual training. We think that the proposed setup will help the understanding of the protocol of subjective refraction and why the patients' answers are not as clear as desired during the examination.

Keywords: Subjective Refraction, Teaching, Optometry, Trial lenses

Acknowledgements: This work has been funded by Ministerio de Ciencia e Innovación PID2020-115909RB-I00, and by Consellería de Cultura, Educación e Ordenación Universitaria, Xunta de Galicia (ED43B 2020/29).

A Pilot Outreach Program for Optics and Photonics: Develop the Advanced and Pioneering Concepts

Haider M. Al-Juboori^{1,*}

¹ Dept. of Electronics Engineering and Communications, Faculty of Engineering, South-East Technological University, Carlow, Ireland.

* haider.aljuboori@setu.ie


Abstract. Optical and laser engineering are not only prevalent in science fiction movies but find numerous technological applications ranging from additive manufacturing over machining of micro/nano-scale features to biomedical imaging or space telescopes applications. In a related context, science simplification lectures with diverse visualization techniques and OSA optics suitcase can be utilized to bring attention and inspire careers in future technologies [1].

The suggested work focuses on developing the outreach program to train the trainees (as photonic ambassadors) specifically in the field of photonics and optical applications which is the expanded programme for multidisciplinary outreach activities as shown in Figure 1 (a). The extended activities can support a wide range of students in Ireland, Europe, and the international prospects as well, which increases the possibility of promoting photonics technology careers in the future.

The paper will explain the guidelines and topics of the proposed practical workshop (INNOVATIVE WAYS TO PHOTONICS FUTURE “TRANSFER THE KNOWLEDGE”) which can help trainees and give them some techniques for engaging targeted students and creating an interactive environment. The detailed characterization of the workshop structures and related pragmatic and sensible sessions will be illustrated in this work. Figure 1 (b) shows the systematic steps of the outline of the developed program.



Figure 1. (a) Photographs of the optics suitcase and part of digital storytelling show-time in Carlow/Ireland [1], (b) Suggested workshop structure of training the trainees.

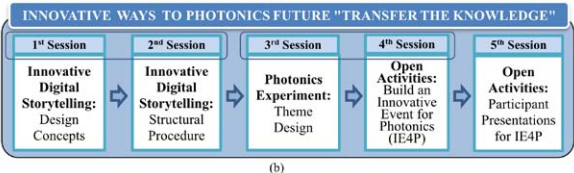

Keywords: Optical Demonstrations, Photonics Technology-Enhanced Learning, Interactive Group Education.

References:

[1] Al-Juboori, Haider M. “Education and Training for Inter-and Multidisciplinary Applications: Methods and Techniques for Educational Outreach for Inspiring Photonics Careers”, Education and Training in Optics and Photonics Conference 2021, ISBN: 978-1- 943580-98-9, Optical Society of America, 2021, doi.org/10.1364/ETOP.2021.W4B.4

Optical properties of low dimensional materials

Pawel Hawrylak

Department of Physics

Advanced Research Complex, Department of Physics, University of Ottawa, 25
Templeton Str, Ottawa ON Canada, K1N 6N5

Abstract. We review here our recent work on optical properties of low dimensional materials. We start with discussion of lasing in semiconductor nanocrystals[1], follow with multi-exciton complexes in self-assembled[2] and graphene quantum dots[3], and finish with exciton fine structure[4] and broken symmetry phases in transition metal dichalcogenides[5].

References:

- [1] Fengjia Fan, Oleksandr Voznyy, Randy P. Sabatini, Kristopher Bicanic, Michael M. Adachi, James R. McBride, Kemar Reid, Young Shin Park, Xiyang Li, Ankit Jain, Rafael Quintero Bermudez, Mayuran Saravanantham, Min Liu, Marek Korkusinski, Pawel Hawrylak, Victor I. Klimov, Sandra J. Rosenthal, Sjoerd Hoogland, Edward H. Sargent, Facet Selective Epitaxy Enables Continuous Wave Lasing in Colloidal Quantum Dot Solids, *Nature* **544**,75 (2017)
- [2] M. Cygorek, M. Korkusinski and P. Hawrylak, "Electronic and optical properties of InAs quantum dots in InP nanowires", *Phys. Rev. B* 101, 075307 (2020).
- [3] A.D.Guclu, P. Potasz, M. Korkusinski and P. Hawrylak, "Graphene Quantum Dots", Springer 2014.; P. Hawrylak, F. Peeters, K. Ensslin, Editors, Carbonics—integrating electronics, photonics and spintronics with graphene quantum dots, *PhysStSol.* 10 , 11(2016).
- [4] E. S. Kadantsev and P. Hawrylak, *Solid State Comm.*152, 909 (2012).
- [5] M. Bieniek, L. Szulakowska, P.Hawrylak, "Band nesting and exciton spectrum in MoS₂", arXiv:2001.00443 *Phys.Rev.B* **101**, 125423 (2020).
- [6] T. Scrace, et al. , *Nature Nano* 10, 603 (2015) . 7. L. Szulakowska, M. Bieniek, M. Cygorek, P.Hawrylak, "Valley and spin polarized broken symmetry states of interacting electrons in gated MoS₂ quantum dots", *Phys.Rev. B* 102, 245410 (2020). <https://arxiv.org/abs/2005.04467>

Superradiant optical shocks in arbitrarily diluted media

J. Vieira^{1*}, M. Pardal¹, J.T. Mendonça¹, R.A. Fonseca^{1,2}

¹GoLP/Instituto de Plasmas e Fusão Nuclear, Instituto Superior Técnico, Universidade de Lisboa, Lisbon, Portugal

²ISCTE, Lisbon University Institute, Lisbon, Portugal

* jorge.vieira@tecnico.ulisboa.pt

Abstract. In its classical formulation, Cherenkov radiation occurs when a point-like particle travels faster than the phase velocity of electromagnetic waves in a medium. When such condition is fulfilled, the particle emits a cone of radiation that forms an optical shock at the Cherenkov angle. There are several optical media where this condition can be fulfilled. Yet, there are also others where Cherenkov emission is classically forbidden, namely vacuum and plasma. In contrast, we show that relativistic electron bunches can produce Cherenkov radiation in any medium, including vacuum. This interesting effect can be obtained by modulating a relativistic electron bunch with certain spatiotemporal modulations, which imprint a matter-wave perturbation travelling superluminally along the bunch. As in the classical Cherenkov effect, an optical shock forms at the Cherenkov angle defined by the matter-wave propagation velocity. We demonstrate that, at the optical shock location, the radiated intensity grows with the number of bunch particles squared. This is a key signature of superradiance. Yet, contrary to the longstanding tenet, according to which superradiance requires many light emitting particles per radiation wavelength, we demonstrate that superradiance can occur using an arbitrarily diluted medium, even when there is less than a particle per wavelength. We explore this concept in the context of a previously unexplored superradiant nonlinear Thomson scattering regime. Our findings can contribute towards a novel generation of advanced superradiant light sources, such as free electron lasers and plasma-based synchrotron light sources.

Keywords: Superradiance, relativistic beams, advanced light-sources, particle-in-cell simulations

References:

[1] J. Vieira, M. Pardal, J. T. Mendonça, R.A. Fonseca, *Nature Physics* **17**, pages99–104 (2021)

Reversible and non-reversible effects of silver nanoparticles on the photoluminescence properties of quantum emitters

Victor Krivenkov,¹ Adam Olejniczak,² Zuzanna Lawera,¹ Dayana Gulevich,³
Pavel Samokhvalov,³ Igor Nabiev,^{3,4} Marek Grzelczak,^{1,5} Yury Rakovich^{1,5,6}

¹ Department of Polymers and Advanced Materials: Physics, Chemistry and Technology, University of Basque Country (UPV/EHU), and Centro de Física de Materiales (CFM, CSIC-UPV/EHU), Paseo Manuel de Lardizabal 5, 20018 Donostia-San Sebastian, Spain

² Institute of Low Temperature and Structure Research, Polish Academy of Sciences, Okólna 2, 50-422 Wrocław, Poland

³ National Research Nuclear University MEPhI (Moscow Engineering Physics Institute), 115409 Moscow, Russian Federation

⁴ Laboratoire de Recherche en Nanosciences, LRN-EA4682, Université de Reims Champagne-Ardenne, 51100 Reims, France

⁵ Donostia International Physics Center, Paseo Manuel Lardizabal 4, 20018 Donostia-San Sebastian, Spain

⁶ IKERBASQUE, Basque Foundation for Science, Maria Diaz de Haro 3, 48013 Bilbao, Spain

victor.krivenkov@ehu.eus

Abstract. Formation of weak plasmon-exciton coupling on nanoscale is a prospective way to overcome some limitations of quantum emitters (QEs) based on semiconductor nanocrystals. Realization of the coupling between plasmon resonance and absorptive transitions of QEs allow to increase the efficiency of photoexcitation of QE and thus to increase the photoluminescence (PL) intensity. In turn the coupling of plasmon resonance and radiative transition of QE is a prerequisite for the Purcell effect realization, increase of the radiative rate and enhancement of the PL quantum yield (QY). Previously we have shown that these effects may be realized and even combined for the stronger enhancement of both exciton and biexciton PL efficiencies and rates in semiconductor quantum dots (QDs) [1-3]. Moreover, our new experiments show that exciton and biexciton PL efficiencies in perovskite nanocrystals and CdSe/CdS QDs may be enhanced or decreased reversibly by real-time change in the structure of plasmon-exciton hybrid films. However for initially low-QY nanocrystals we observed irreversible increase in the PL efficiency even after the total elimination of plasmon-exciton interaction. We explained these effects by the plasmon-induced changes in rates of radiative and nonradiative transitions.

Acknowledgements: Victor Krivenkov has received funding from the European Union's Horizon 2020 research and innovation programme under the Marie Skłodowska-Curie, grant agreement no. 101025664 (QESPEM).

References:

- [1] Krivenkov, V. et al. J. Phys. Chem. Lett. 10(3), 481–486 (2019).
- [2] Krivenkov, V. et al. Ann. Phys. 532(8), 2000236 (2020).
- [3] Krivenkov, V. et al. J. Phys. Chem. Lett. 11(19), 8018–8025 (2020).

Multi-wavelength optical phase unwrapping using low coherence Mirau interferometer

Amalia Martínez-García*, Ivan Hernández-Gutiérrez, Juan Antonio Rayas-Alvarez, Ana Karen Reyes

Centro de Investigaciones en Óptica, A. C., Loma del Bosque 115, Col. Lomas del Campestre, León, Guanajuato, C. P. 37150, México

* amalia@cio.mx

Abstract. The phase ambiguity in conventional interferometers can be removed by using two or three different optical frequencies to generate a synthetic wavelength. The usefulness of synthetic wavelengths for removing phase ambiguities has been well documented [1-3], but the practical application of these techniques depends on the availability of compact, efficient, and reliable multiple-wavelength sources. In this work, we have implemented a micro-interferometer by using a Mirau interferential objective and the three-wavelength method to generate a synthetic wavelength and can achieve measurement of until 4350 nm step height. The phase ambiguity is removed using three light-emitting diodes (LEDs) emitting at three different wavelengths (Red, Green and Blue): $\lambda_1 = 458.7 \text{ nm}$, $\lambda_2 = 512.8 \text{ nm}$ and $\lambda_3 = 637 \text{ nm}$. Since LEDs have coherence lengths in micron range, speckle noise is greatly reduced. The phase-shifting algorithm called 8-Bell6 was applied to evaluate the phase map [4]. It is considered a correction due to the compensation of the cross talking between the red, green and blue channels (RGB). Measurements were made using, as a reference object, a thin-film aluminum step with a height of 1000 nm. The average height of this step, from our measurements, using three wavelengths interferometry was 970.97 nm. The relative error of the measurement is 2.9%. The effectiveness of multi-wavelength optical phase unwrapping using light sources of low coherence is demonstrated when it is evaluated the micro-topography of Red Blood Cells (RBC).

Keywords: Mirau objective, red blood cells, synthetic wavelength, phase-shifting algorithm, cross talking.

Acknowledgements: Ivan Hernández-Gutiérrez gratefully acknowledges the scholarship 1075284 granted by CONACYT, México.

References:

- [1] Kitagawa K. 2010. Fast surface profiling by multi-wavelength single-shot interferometry. *International Journal of Optomechatronics*, 4(2): 136-156.
- [2] Warnasooriya, N., and Kim, M. K. [Advances in Lasers and Electro Optics], Chapter 33: Quantitative Phase Imaging using Multi-wavelength Optical Phase Unwrapping, edited by Nelson Costa and Adolfo Cartaxo, INTECH, Croatia, 769-786 (2010).
- [3] Gass, J., Dakoff, A., and Kim, M. K. 2003. Phase imaging without 2π ambiguity by multiwavelength digital holography. *Optics Letters*, 28(13): 1141-1143.
- [4] Schmit, J., and Creath, K. 1996. Window function influence on phase error in phase-shifting algorithms. *Applied Optics*, 35 (28): 5642–5649.

White light interferometer for Fabry-Perot cavities sensors with absolute physical measurement

João Reis^{1,3*}, António V. Rodrigues^{1,2}, Paulo Robalinho^{1,2}, Susana Novais¹,
João Maia¹, Paulo Marques^{1,3}, D. Roma^{4,5}, J. Salvans^{4,5}, M. Canal^{4,5}, J. Ramos^{4,5},
V. Gualani^{4,5}, S. Sisteré^{4,5}, V. Martín^{4,5}, M. Nofrarias^{4,5}, Susana Silva¹,
Orlando Frazão¹

¹ INESC TEC, Rua do Campo Alegre s/n, 4169-007 Porto, Portugal

² Faculdade de Engenharia da Universidade do Porto, Rua Dr. Roberto Frias, s/n, 4200-465 Porto, Portugal

³ Faculdade de Ciências da Universidade do Porto, Rua do Campo Alegre s/n, 4169-007 Porto, Portugal

⁴ Institut de Ciències de l'Espai (ICE, CSIC), Campus UAB, Carrer de Can Magrans s/n, 08193 Cerdanyola del Vallès, Spain

⁵ Institut d'Estudis Espacials de Catalunya (IEEC), Gran Capità, 2-4, Ed. Nexus, 08034 Barcelona, Spain

joao.m.goncalves@inesctec.pt

Abstract. In this work an optical fiber interrogation system based on white light interferometry for Fabry-Perot (FP) cavities was developed. The system consists of two FP cavities in series. One FP interferometer, with nominal length of 191 μm , was interrogated by a Fabry Perot cavity with nominal length of 200 μm . The interrogation system was modulated with the aid of a PZT driven by a triangular signal at 5 Hz and varying amplitude, generated by a commercial signal generator. The output signal was collected, for each amplitude, by a photodetector and displayed on an oscilloscope. The signal displayed on the oscilloscope has the shape of a sinc. When the two cavities are balanced, i.e, there is no optical path difference between them, a maximum of the sinc is observed. The advantage of this system is that it can be used to estimate physical parameters (temperature, strain) with higher resolution than commercial optical interrogators.

Keywords: Fabry Perot Cavities, White Light Interferometry, Optical Interrogators

Acknowledgements: This work was realized with the financial support of the Lira Project in accordance with the terms of ESA Contract No. 4000135481/21/NL/AR.

A Low-cost Portable Interrogator for Dynamic Monitoring of Wavelength-Based Sensors

Mariana L. Khouri¹, Marcelo E. V. Segatto¹, Maria J. Pontes¹,
Maxwell Eduardo Monteiro², Anselmo Frizera¹, Camilo A. R. Diaz¹

¹Electrical Engineering Department, Federal University of Espírito Santo, Fernando Ferrari avenue, 29075-910 Vitória-ES, Brazil

²Electrical Engineering Department, Federal Institute of Espírito Santo (IFES), 29166-630, Serra-ES, Brazil

mariana.khouri@edu.ufes.br

Abstract. Fiber optics systems have developed considerably in the last 40 years. As the technology matured, advantages in fields other than telecommunications were discovered. Some of these advantages are the ones found in fiber-optic sensors. They are small, lightweight, resistant to electromagnetic interference, capable of multiplexing, chemically stable, and highly sensitive — all while on passive operation. Therefore, in the present day, these sensors can be great alternatives for remote sensing needed in robotics, medicine, and the industry overall. However, despite the benefits they have when compared to conventional technologies, commercial interrogators capable of acquiring the needed data remain relatively expensive and do not offer much portability. As a result, the usability of this solution in several fields is limited, for instance, in rehabilitation robotics (prostheses, orthoses, exoskeletons) where the interrogator must be integrated with the device, wearable sensors or smart textiles, and in general, applications where the interrogation unit would be in constant movement and needs to be integrated with the sensors in the same structure. This paper addresses this issue and proposes a low-cost portable interrogator for dynamic monitoring of wavelength-based fiber-optic sensors such as fiber Bragg gratings (FBGs) and Fabry-Perrot interferometers (FPIs). The interrogator is based on a compact solution involving a broadband light source and the spectral convolution between the sensor and a tunable filter. The filtered signal is then acquired by a photodetector where the optical-electrical conversion happens. Additionally, a microcontroller performs three actions: (i) controls the filter tuning, (ii) acquires the photodetector signal, and (iii) sends the data to a single-board computer (SBC). Lastly, the SBC performs further signal processing and displays the sensor data on a graphical user interface. The choice for hardware and software development combined allows for a low-cost solution that supports monitoring of four channels simultaneously, real-time operation, compatibility with Windows and Linux-based operating systems, dynamic inputs for signal processing, and portability (wireless communication with low latency). This is done by using a high-performance microcontroller, writing its firmware and using a real-time operating system for better resource management. For the single-board computer, a program with a graphical user interface was developed in Python to perform the necessary signal processing, support dynamic monitoring, and many other functions to improve user experience.

Keywords: Interrogators, fiber Bragg gratings, Fabry-Perrot Interferometers, embedded systems

Development of a Low-Cost Interrogation System Using a MEMS Fabry-Pérot Tunable Filter

João C. C. Araújo^{1,2}, Bernardo Dias^{1,2}, Paulo S. S. dos Santos^{1,2},
J. M. M. de Almeida^{1,3} and Luís C. C. Coelho^{1,2}

¹ INESC TEC - Institute for Systems and Computer Engineering, Technology and Science, and FCUP, Univ. of Porto, R. do Campo Alegre, 4169-007 Porto, Portugal

² FCUP, University of Porto, Rua do Campo Alegre, 4169-007 Porto, Portugal

³ Dep. of Physics, Univ. of Trás-os-Montes e Alto Douro, 5001-801 Vila Real, Portugal

* joao.c.araujo@inesctec.pt

Abstract. The interrogation of optic fiber sensors usually relies in complex and costly equipment with low portability due to their size. Because of this, micro spectrometer devices, such as Micro-Electromechanical Systems (MEMS) with Fabry-Pérot tunable filters, are emerging as simpler and compact alternatives [1].

Fiber Bragg Gratings (FBGs) are structures formed by a periodic modulation of index of refraction of the fiber's core. Long Period Fiber Gratings (LPFGs) are special cases of FBGs with larger grating periods. These are formed in common and cheap telecommunication fiber. However, the interrogation methods usually involve the use of typical Optical Spectrum Analyzers (OSA) which are expensive and only suited to laboratory tests [2], or dedicated OSAs with limited spectral response ranges. Our group has already published a low-cost alternative capable of interrogating LPFGs using three thermally modulated fiber-coupled laser diodes [3].

In this work it is described the development of an interrogation system capable of infrared spectroscopy using a MEMS Fabry-Pérot Interferometer (MEMS-FPI) with a spectral response in the 1350nm to 1650nm range. Its performance is tested with the interrogation of LPFGs both as a refractive index sensor and as a temperature sensor. Deconvolution techniques such as Wiener filtering are used to reduce the impact of the tunable filter's impulse response in the measured signal. Results are comparable to those obtained using a typical OSA which shows the system's potential as a cheaper and more transportable alternative.

Keywords: Fabry-Pérot; Interrogation Techniques; Long Period Fiber Grating; Optical Fiber Sensors.

Acknowledgements: This work is financed by National Funds through the Portuguese funding agency, FCT - Fundação para a Ciência e a Tecnologia, within project UIDB/50014/2020, the PhD grant SFRH/BD/146784/2019 and the research contract CEECIND/00471/2017.

Single-cycle laser pulses through nonlinear pulse compression

**Mariana Silva¹, Victor Hariton¹, Patrícia Estrela¹, Gareth Williams¹,
Gonçalo Figueira¹, Louis Daniault², Rodrigo Lopez-Martens², Marta Fajardo¹**

¹ Instituto Superior Técnico, Universidade de Lisboa, Av. Rovisco Pais 1, 1049-001
Lisboa, Portugal

² Laboratoire d'Optique Appliquée, CNRS, Ecole Polytechnique, ENSTA Paris,
Institut Polytechnique de Paris, 181 chemin de la Hunière et des Joncherettes, 91120,
Palaiseau, France

mcunhasilva@tecnico.ulisboa.pt

Abstract. Today most ultrashort lasers are capable of producing pulses in the order of dozens of femtoseconds, using mode-locked Ti:Sapphire oscillators. These ultrashort pulses are the tools of choice for exploring electron dynamics inside atoms, molecules and solids or in nanostructures. Shorter and more energetic pulses allow to explore electron dynamics inside atoms, molecules and solids or in nanostructures. This can be achieved with isolated attosecond pulses (IAPs) produced through few-cycle laser-driven high-harmonic generation (HHG), unlocking diagnostic tools like attosecond x-ray diffraction and spectroscopy with tabletop sources [1].


Our setup at the Voxel laboratory (GoLP/IPFN at Instituto Superior Técnico) consists of a Coherent Astrella laser (45 fs, 800 nm, 3.00mJ, 1kHz) whose output is focused onto a 250 μm inner diameter differentially pumped hollow core fiber, pressurized with Argon gas. The spectrally broadened output from the hollow core fiber is re-collimated before the beam is both compressed and measured in time by a d-scan system from Sphere Ultrafast Photonics [2]. Only a few mW are sampled for compression and diagnostics. The compressed beam is planned to be used for HHG in solids and gas.

In the Voxel laboratory at Instituto Superior Técnico we have achieved 3.81fs with minimal GDD and a transmission of 33%. The setup is still under optimization but already represents a powerful tool for table-top single cycle laser pulses in laboratories.

Keywords: nonlinear optics, hollow-core fibers, spectral broadening, D-Scan.

References:

- [1] J. Schötz, et al, Phys. Rev. X 10 10.041011 (2020) <https://doi.org/10.1103/PhysRevX.10.041011>
- [2] Francisco Silva, et al Opt. Express 22, 10181-10191 (2014) <https://doi.org/10.1364/oe.22.010181>

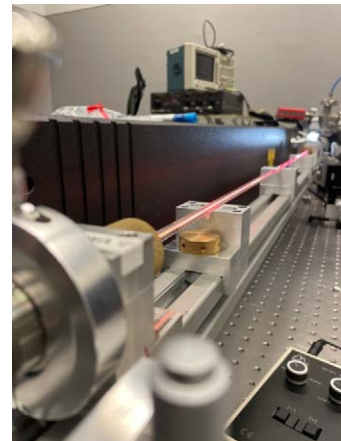

Pulse broadening and compression of visible spectral range laser in a Herriott cell

Victor Hariton^{1,2}, Kilian Fritsch², Gonçalo Figueira¹ and Oleg Pronin²

¹ Instituto Superior Técnico, Universidade de Lisboa, Av. Rovisco Pais 1, 1049-001 Lisboa, Portugal

² Helmut Schmidt University, Holstenhofweg 85, 22043 Hamburg, Germany

victor.hariton@tecnico.ulisboa.pt

Abstract. Spectral broadening and compression is a powerful technique to generate short pulses around 1 μm [1,2]. Extending this approach to different wavelengths would be highly beneficial. For instance, increasing demand for coherent and ultrafast laser sources in the 250–530 nm (UV to visible) spectral range is rising for industrial and scientific applications [3]. In this work, we propose shortening the pulses directly in green to not compromise the frequency doubling efficiency. We use a traditional BBO crystal for efficient second-harmonic generation at a moderate (>250 fs) pulse duration, from 1030 nm to 515 nm, followed by a spectral broadening and compression scheme in a Herriot-type cell (HC), using a bulk material as the nonlinear medium. The driver laser (Light Conversion PHAROS) delivers 15 W average power at 1 μm , emitting 250 fs pulses with a pulse energy of up to 200 μJ at a repetition rate of up to 1 MHz. After the conversion stage, the pulses are spectrally broadened and compressed in a multi-pass cell yielding sub-40 fs pulses with over 20 nm bandwidth around 515 nm. The efficiency of spectral broadening and compression exceeds 90 %. These results represent the first implementation of a multi-pass spectral broadening and compression in the green spectral regions and pave the way for similar experiments in UV.

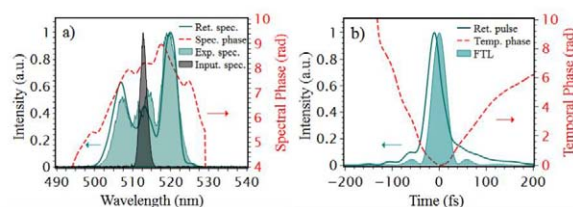


Fig. 1 a) Measured (shaded area) and FROG retrieved (solid line) output spectrum and spectral phase (dashed line) for the solid state broadening scheme at input energy of 15 μJ . b) FROG-retrieved temporal profile (solid line), temporal phase profile (dashed line), and FTL reference (shaded area). The measured duration was 38 fs with an FTL of 35

Keywords: Nonlinear optics, spectral broadening, multi-pass cell.

References:

- [1] J. Weitenberg et al., Multi-pass-cell-based nonlinear pulse compression to 115 fs at 7.5 μJ pulse energy and 300 W average power. *Optics Express*, 2017. 25(17): p. 20502-20510.
- [2] K. Fritsch et al., All-solid-state multipass spectral broadening to sub-20 fs. *Optics Letters*, 2018. 43(19): p. 4643-4646.
- [3] M. Gu, D. Bird, D. Day, L. Fu, and D. Morrish, *Femtosecond Biophotonics: Core Technology and Applications* (Cambridge University Press, New York, 2010).

YCOB based ultrabroadband optical parametric amplification with a sub-picosecond pump source

Hugo Pires ^{1,*}, Joana Alves ¹, Victor Hariton ¹, Mario Galletti ^{1,2}, Celso P. João ^{1,3},
and Gonçalo Figueira ¹

¹ Group of Lasers and Plasmas (GoLP), Instituto de Plasmas e Fusão Nuclear (IPFN),
Instituto Superior Técnico, Universidade de Lisboa, Av. Rovisco Pais, 1049-001
Lisbon, Portugal

² INFN-LNF, Via Enrico Fermi 40, 00044 Frascati, Italy

³ LaserLeap Technologies, Rua Coronel Júlio Veiga Simão, CTCV, Edifício B, 3025-
307 Coimbra, Portugal

* hugo.pires@tecnico.ulisboa.pt

Abstract. Over the last decade there has been a growing interest in the applications enabled by high peak and high average power laser sources, in particular in the strong-field physics community. The progress in diode-pumped solid state sources coupled to nonlinear amplifiers based on optical parametric chirped pulse amplification (OPCPA) has enabled the development of state-of-the-art sources in the near- and mid-infrared spectral regions [1]. The OPCPA technique employs nonlinear crystals to mediate the energy transfer from a more readily available, long-pulse laser (the pump) into an ultrabroadband pulse (the signal), temporally stretched to match the pump duration, which can then be compressed to an ultrashort duration. The nature of parametric amplification allows overcoming the gain narrowing associated to inversion-based optical gain, while also allowing a tunable output. Driven by highly efficient and energetic diode-pumped, ytterbium-based sources, OPCPA has led to a new generation of advanced, high repetition rate ultrashort pulse systems [2]. We demonstrate the optical parametric amplification of broadband near-infrared laser pulses using a single yttrium calcium oxyborate (YCOB) crystal pumped in a noncollinear geometry by a sub-picosecond, milijoule-level source. The crystal uses an optimized orientation for phase matching outside of the principal planes, enabling ultrabroadband amplification in the range 750-950 nm. An amplified energy of 2 μ J is obtained, followed by compression to 25 fs.

Keywords: Ultrafast Lasers; Parametric Amplification; Nonlinear Optics; Materials.

Acknowledgements: This project has received funding from Fundação para a Ciência e Tecnologia under grant Laserlab Portugal (National Roadmap of Research Infrastructures, PINFRA/22124/2016); European Union's Horizon 2020 research and innovation programme under grant agreement no. 871124 (Laserlab-Europe

References:

- [1]. J. Rothhardt et al "High average power near-infrared few-cycle lasers," *Laser Photonics Rev.* 11, 1–25 (2017).
- [2]. H. Fattahi et al "Third-generation femtosecond technology," *Optica* 1, 45–63 (2014).

High contrast front-end for a petawatt laser system designed for electron acceleration and high intensity laser-matter applications towards advanced compact particle accelerators

M. Galletti

University of Rome Tor Vergata, Rome, Italy
INFN Tor Vergata, Rome, Italy

mario.galletti@lnf.infn.it

Abstract. Coherent light sources in spectral regions inaccessible to lasers have been an important issue for more than five decades. Despite tremendous progress in laser technology, substantial portions of the optical spectrum from UV to IR still remain inaccessible to conventional laser sources. This limitation arises from the limited gain bandwidth of the active medium, which defines the operating spectral region of the laser. This directly limits the application of such devices, while also placing a boundary on ultrashort pulse generation, which requires very broad bandwidths. In this context, coherent optical sources based on nonlinear conversion, with femtosecond/picosecond pulse duration and wide tunability, are rapidly emerging. They are extremely versatile and of considerable interest in a wide range of scientific and technological areas. We investigated the generation of ultrashort laser pulses in the near-infrared region between 750 and 1000 nm, which is of interest for current large-scale laser projects based on optical parametric amplification. We focus our attention on the design and development of efficient ultra-broadband Optical Parametric Amplification (OPA) stages in the picosecond regime and the relative temporal diagnostics. The developed operational systems are implemented at the Vulcan laser system at CLF devote to the upgrade of the laboratory with a fully Optical Parametric Petawatt laser system for laser-plasma interaction and pump-probe experiments. Furthermore, in this presentation, one of the most promising applications of such systems delivering ultrashort pulses is investigated. The technique presented is the Target Normal Sheath Acceleration (TNSA) which has been suggested for industrial, medical and physics research applications such as radiotherapy, isotopes production, fusion fast ignition schemes and proton imaging. A proper investigation of the experimental parameters influencing the TNSA process is needed to reach the most efficient operating conditions. The conducted experimental research is aimed at acquiring greater insight into the TNSA process, with a particular interest in the relation between the ultrafast electron beams, the established accelerating potential and the subsequent ion acceleration for different targets and laser parameters. The experimental campaign has been carried on in collaboration with the SPARC-LAB group at LNF-INFN.

Keywords: Ultrashort Lasers systems, OPA, TNSA, electron acceleration, proton acceleration.

Engineering the pupil for wavefront masking

Justo Arines^{1,2}, Enrique Gonzalez-Amador^{3,4}, Eva Acosta³

¹ Departamento de Física aplicada, Facultad de Óptica y Optometría, Campus Vida, Universidad de Santiago de Compostela, 15782 España

² Instituto de Materiais (iMATUS), Campus Vida, Universidad de Santiago de Compostela, 15782 España

³ Departamento de Física aplicada, Facultad de Física, Campus Vida, Universidad de Santiago de Compostela, 15782 España

⁴ Universidad Politécnica de Tulancingo, Optics Laboratory, Calle Ingenierías 100, Hidalgo, Mexico; en-rique.amador@upt.edu.mx

justo.arines@usc.es

Abstract. Correction of low and high order aberrations for image enhancement has been performed using static elements, mainly for low order aberrations, and tuneable elements, like spatial light modulators or deformable mirrors, for correcting low and high order aberrations. The corrective element is shaped to counteract each of the aberrations presented by the system, following a compensatory framework. If the wavefront error changes, the corrective element has to change. Correction of ocular high order aberrations by static elements, as for example contact lenses, failed mainly due to misalignments which make impossible the compensation of the aberrations. There is another way of facing image enhancement in systems with aberrations, “wavefront masking”. The idea is to include in the system an aberration that makes the optical transfer function of the system invariant to changes in the aberrations. This is the base of the technique named Wavefront Coding. In this work we will present this idea and explore its use in visual optics. We will show how it can be used to obtain high resolution images of the retina for improving ocular diagnosis. Besides we will show examples of the use of this idea for improving vision quality of patients suffering different refractive errors, and presbyopia. Moreover, we explored the performance on eyes with high amounts of high order aberrations as those presenting corneal ectasia. We will show different numerical simulations using Fourier Optics. For improving retinal images, we will show the degraded and enhanced images under different ocular aberrations. In the case of visual optics, we will simulate the vision of an eye under different pupil sizes and optotypes at different working distances, in presence of different ocular aberrations.

Keywords: Wavefront Coding, Jacobi Fourier Polynomials, Presbyopia

Acknowledgements: This work has been funded by Ministerio de Ciencia e Innovación PID2020-115909RB-I00.y Consellería de Cultura, Educación e Ordenación Universitaria, Xunta de Galicia (ED43B 2020/29),

References:

- [1] Acosta, E., Olvera-Angeles, M., González-Amador, E., Sasian, J., Schwiegerling, J., & Arines, J. (2020). Wavefront coding with Jacobi–Fourier phase masks for retinal imaging. *Applied optics*, 59(22), G234-G238.

What is the impact of accommodative insufficiency on the optical quality of the eye?

Jessica Gomes, Kishor Sapkota and Sandra Franco

Centre of Physics of University of Minho, 4710-057 Braga, Portugal

Jessicarafamg@gmail.com

Abstract. The aim of this study was to analyse the changes of high-order aberrations with accommodation and its impact in the ocular optical quality in subjects with accommodative insufficiency. For that purpose, data from eleven subjects with accommodative insufficiency were analysed, and compared to data from a control group of thirteen subjects without any accommodative dysfunction. The most significant changes occurred in primary and secondary spherical aberrations and vertical and horizontal comas. The changes of these aberrations with accommodation were different in subjects with and without accommodative insufficiency and were higher in the group of subjects with accommodative insufficiency compared to the control group, causing greater deterioration of the retinal image quality.

Acknowledgments: This work was supported by the Portuguese Foundation for Science and Technology (FCT) in the framework of the Strategic Funding UID/FIS/04650/2019 and by the project PTDC/FISOTI/31486/2017 and POCI-01-0145-FEDER-031486. The author Jessica Gomes is also supported by the PhD grant 2020.08737.BD from FCT.

Low cost adherent lenses for presbyopia

Alejandro Fernández-Rodríguez¹, Ana Gómez-Varela,^{2,3} Justo Arines^{1,3}

¹ Departamento de Física aplicada, Facultad de Óptica y Optometría, Campus Vida, Universidade de Santiago de Compostela, 15782 España

² Departamento de Física aplicada, Facultad de Física, Campus Vida, Universidade de Santiago de Compostela, 15782 España

³ Instituto de Materiais (iMATUS), Campus Vida, Universidade de Santiago de Compostela, 15782 España

justo.arines@usc.es

Abstract. In this work we propose a very simple method for manufacturing self-adhesive lenses for presbyopia that can be attached to monocular ophthalmic lenses. The lenses are fabricated by soft embossing, using as a mould the posterior base curve of ophthalmic lenses of different prescriptions, and trial lenses typically used during the subjective refraction process. Our method is the simplest of the ones found in the literature. Besides, previous works do not analyse the aberrations of the manufactured lenses, and do not show the performance of the lenses attached to the ophthalmic lenses, questions that we analyse in here. The elastomeric lenses were made of Polydimethylsiloxano, a transparent and flexible material. After their fabrication, we measured their power with a frontofocometer and their aberrations with a Hartmann-Shack wavefront sensor. We tested the performance of the lenses after being placed on spherical and spherocylindrical ophthalmic lenses, with the Hartmann-Shack wavefront sensor. The results showed that the manufactured lenses do not present astigmatism or high order aberrations, being their optical quality very high. We also tested the optical performance of the lenses. We built an artificial eye with a camera and a 24.5 mm lens with an aperture of 4 mm, to mimic the eye. The artificial eye was corrected at far vision with an ophthalmic lens of -1.75 D. We took pictures of the optotype at far and at 50 cm. Then we placed one of the manufactured adherent lenses with 2 D of power at the front surface of the ophthalmic lens. We found that the adherent lenses allow for the perfect visualization of the optotype at near, showing the suitability of the adherent lenses to be used for presbyopia correction. The proposed lenses can be useful for those users that prefer to have a removable add for reading instead of changing the spectacles or using bifocals or progressive lenses.

Keywords: PDMS, presbyopia, Zernike, Adherent lens

Acknowledgements: This work has been funded by Ministerio de Ciencia e Innovación PID2020-115909RB-I00, and by Consellería de Cultura, Educación e Ordenación Universitaria, Xunta de Galicia (ED43B 2020/29). Ana I. Gómez-Varela acknowledges Consellería de Cultura, Educación e Ordenación Universitaria for a Postdoctoral fellowship (Xunta de Galicia, Spain; ED481D-2021-019).

References:

[1] US5478824 , Adherent corrective lens, 1994

Assessment of central and peripheral accommodative lag by aberrometry

Kishor Sapkota*, Jessica Gomes, Sandra Franco

Visual Optics and Ophthalmic Instrumentation Research Lab, Centre of Physics,
University of Minho, 4170-Braga, Portugal

* kishorsapkota@gmail.com

Abstract. Accommodation lag is important factor for normal vision. Higher lag of accommodation may cause various ocular symptoms particularly during near tasks. In this study, the aim was to assess the lag of accommodation in the peripheral retina and compared it with the central accommodative lag with aberrometer. This was a cross-sectional study conducted in the University of Minho. Fifty-three young subjects with normal visual acuity and without any active ocular disease or past ocular surgery were included in this study. Aberrations in the central and peripheral field of view up to 30° off axis from the centre in horizontal and vertical meridian in 10° steps were measured with Hartmann-Shack aberrometer with stimulation of accommodation by -2.50D lens. Accommodative stimulus and accommodative response were calculated with defocus and hence accommodative lag was obtained. Accommodative lag in the centre and periphery was compared. Repeated measure of ANOVA showed that there was overall significant difference in lag of accommodation in various eccentricities ($F(8,912, 454.514) = 2.372, p = 0.013$). Pairwise test showed that lag in the centre was similar with lag on other peripheral field of view ($p > 0.05$). However, accommodative lag at 10° nasal field was significantly lower than the lag at 20° temporal, 20° nasal, 30° temporal and 30° nasal ($p < 0.05$). Similarly, lag at 10° superior fixation was lower than lag at 20° temporal, 20° nasal, 30° temporal and 30° nasal fixations ($p < 0.05$). We found higher lag of accommodation in horizontal off-axis fixations in comparison to that of vertical off-axis fixations ($p < 0.05$). Lag of accommodation was positive correlated with vertical coma and primary spherical aberrations but negative correlated with secondary spherical aberrations ($p < 0.05$). Thus, Hartmann-Shack aberrometer was successfully used to assess accommodative lag in the peripheral field of view up to 60° visual field. Peripheral lag of accommodation depends up on eccentricity. Lag was found higher in horizontal off-axis fixation than at vertical fixations. Coma and spherical aberration had association with lag.

Acknowledgement: This work was supported by the Portuguese Foundation for Science and Technology (FCT) in the framework of the Strategic Funding UID/FIS/04650/2019 and by the project PTDC/FIS-OTI/31486/2017 and POCI-01-0145-FEDER-031486.

Comparison between central corneal thickness, anterior chamber depth and axial length values with and without contact lenses

**Veronica Noya-Padin, Noelia Nores-Palmas, Maria J. Giraldez,
Hugo Pena-Verdeal, Eva Yebra-Pimentel**

Departamento de Física Aplicada (Área de Optometría), Facultade de Óptica e
Optometría, Universidade de Santiago de Compostela, Santiago de Compostela, Spain

veronica.noya.padin@rai.usc.es

Abstract. Purpose: To compare the values of central corneal thickness (CCT), the anterior chamber depth (ACD) and the axial length (AL) on measurements performed with and without contact lenses (CL) in healthy subjects with two different devices (Visionix 120+ and EchoScan US-800). Material and methods: 20 volunteer participants (6 men and 14 women, 24.8 ± 2.73 years) were recruited. In a single visit, participants underwent autorefraction, biometry, topography and pachymetry with the naked eye (without CL). Then, biometry and pachymetry were repeated twice wearing two different CL (Somofilcon A and Nesofilcon A) of -3.00D lens power fitted in random order. Data were compared using t-tests for related samples. Results: CCT values wearing CL were significantly higher than those obtained with the naked eye (Paired t-test; both $p \leq 0.001$). On the other hand, no significant differences were found between the ACD or AL values with the naked eye versus any of the CL studied (Paired t-test, all $p \geq 0.111$). The ACD values comparing Visionix120+ to EchoScan US-800 measurements were significantly different with both the naked eye and with any CL (Paired t-test; all $p \leq 0.001$). Conclusion: CCT measurements cannot be performed while wearing CL. In contrast, ACD and AL measurements were not affected by the use of any CL. In addition, it was observed that ACD results from both devices are not interchangeable neither when measured with the naked eye nor using any CL.

Keywords: Central corneal thickness, Anterior chamber depth, Axial length, Visionix120+, EchoScan US-800

Subaquatic laser induced plasma-assisted ablation for channels and wells fabrication on glass substrates

Carmen Bao-Varela^{1*}, Bastián Carnero^{1,2}, María Teresa Flores-Arias¹
and Ana I. Gómez-Varela¹

¹ Photonics4Life Research Group, Applied Physics Department, Instituto de Materiais, IMATUS, and Facultade de Física and Facultade de Óptica e Optometría, Universidade de Santiago de Compostela, Campus Vida, E-15782 Santiago de Compostela, Spain.

² BFlow S.L., Edificio Emprendia, Santiago de Compostela, Spain.

* carmen.bao@usc.es

Abstract. The year 2022 has been declared as the International Year of Glass by the United Nations General Council [1] due to the important role played by the glass in different researching and industrial fields. There are many different techniques for machining and processing glass depending on their characteristics and the results to be obtained. Among all these techniques, laser glass processing stands out due to its simplicity, flexibility, low contamination, and so on. To our knowledge, the precise manufacturing of glass with rectangular cross section, steep edges (vertically) and great depth is still a challenge specially using nanosecond lasers. In this work we present a technique called Subaquatic indirect Laser Induced Plasma-Assisted Ablation (SLIPAA) for glass processing that reduces the thermal effects generated using nanosecond laser. Moreover, it facilitates the ejection of material from the laser-plasma interaction zone. In this technique, a laser beam is focused on a metal foil after passing through a glass and a layer of water. The laser source used is a Nd:YVO₄ laser operating at its fundamental wavelength, 1064 nm, with a pulse duration of 20 ns combined with a galvanometer system and a flat field lens that grants a homogeneous energy distribution on an area of 12 x 12 cm² on the target. When the laser is focused on the metallic target, a plasma located between the glass substrate and the target is generated and confined by the water layer. The mechanical shock waves [2], generated by the focused laser, combined with the ablation plume and the cavitation bubbles allow the ablation on the rear face of the glass. With this technique and selecting the proper processing parameters (fluence, repetition rate and scanning speed) it is possible to fabricate rectangular shaped channels and wells with a variety of dimensions and straight edges of excellent quality. The dependence of the fabricated structures shape on the processing parameters and the key points for complex structures manufacturing on glass using this technique will be discussed.

Acknowledgements: Work supported by the Consellería de Educación Xunta de Galicia/FEDER (ED431B 2020/29 UE) and the Agencia Estatal de Investigación, Ministerio de Economía y Competitividad, Spain (AEI RTI2018-097063-B-100). Ana I. Gómez-Varela acknowledges Consellería de Cultura, Educación e Ordenación Universitaria for a Postdoctoral fellowship (Xunta de Galicia, Spain; ED481D-2021-019). B. Carnero thanks to GAIN/Xunta de Galicia by the contract under no. 11_IN606D_2021_2604925

References:

- [1] UN General Assembly. UN Resolution L84, International Year of Glass, 2022 n.d. <https://undocs.org/en/A/75/L.84>
- [2] Gečys P, Dudutis J, Račiukaitis G. Nanosecond Laser Processing of Soda-Lime Glass. *J Laser Micro/Nanoengineering* 2015;10:254–8. <https://doi.org/10.2961/jlmn.2015.03.0003>

Optimization of pulsed laser deposition process of superconducting $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ films

Mohd Mustafa Awang Kechik^{1*}, Pavlo Mikheenko², John Stuart Abell³,
Adrian Crisan³, Aliah Nursyahirah Kamarudin¹, Nur Athirah Che Dzul-Kifli¹,
Hussein Baqiah⁴, Chen Soo Kien¹, Muhammad Kashfi Shabdin¹, Lim Kean Pah¹
and Abdul Halim Shaari¹

¹ Superconductor and Thin Film Laboratory, Physics Department, Faculty of Science, Universiti Putra Malaysia (UPM), 43400 UPM Serdang, Selangor Darul Ehsan, Malaysia

² Department of Physics, University of Oslo, P. O. Box 1048 Blindern, 0316 Oslo, Norway

³ School of Metallurgy and Materials, University of Birmingham, Edgbaston, Birmingham B15 2TT, UK

⁴ Shandong Key Laboratory of Biophysics, Institute of Biophysics, Dezhou University, No. 566 University Rd. West, Dezhou, Shandong, China

mmak@upm.edu.my

Abstract. Pulsed laser deposition (PLD) employing a scanning laser beam was used to deposit $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ thin films on SrTiO_3 (STO) single-crystal substrates. Factor that affects the quality of the thin films including deposition temperature (T_s), in-situ annealing oxygen pressure (O_{ap}) and cooling time (C_t) were examined by AC susceptibility, magnetisation loops and transport measurements using a Quantum Design Magnetic property measurement system (MPMS) respectively to investigate its influence on the characteristics of the superconducting thin films. The effect of the thin film's microstructure was observed by Scanning electron microscopy (SEM), Atomic force microscopy (AFM) and X-ray diffractions (XRD). The critical temperature (T_c) decreased when the T_s rose from 780 to 820 °C. Film grown at T_s of 780 °C showed the smoothest surface with root mean square (RMS) ~ 2.40 nm. The RMS increased with increasing T_s . The T_c increased with O_{ap} and C_t to the optimum value of 91 K and then decreased. The granular and porous microstructure of the films was progressively observed with increasing O_{ap} . The orientation of the thin films grown on the single crystal as observed by XRD was totally along the (001) plane. The maximum current density (J_c) of 2.8 MAcm⁻² at self-field and 0.8 MAcm⁻² at 1 Tesla was achieved at 77.3 K. An optimum annealing oxygen pressure O_{ap} of 450 Torr was found to generate a peak J_c at 5 K and 77.3 K. It was found that thin film with a superconducting transition temperature of 91 K can be obtained at T_s of 780 °C and O_{ap} 450 Torr.

Keywords: Deposition temperature; *in situ*-annealing oxygen pressure; Superconducting; $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$; pulsed laser deposition.

Acknowledgements: This work was supported by Ministry of Higher Education Malaysia (MOHE) under FRGS grant FRGS/1/2017/STG02/UPM/02/4 and KA107 ERASMUS+ Programme-International Credit Mobility-UmoveME

Optical, structural, morphological and chemical properties of doped TiO₂ nanoparticles with FeCl₃

Cátia Afonso^{1*}, Iran Rocha Segundo^{1,2*}, Orlando Lima Jr.², Salmon Landi Jr.³,
Natália Homem⁴, Manue IF. M. Costa⁵, Elisabete Freitas² and Joaquim Carneiro^{1*}

¹ Centre of Physics of Minho and Porto Universities (CF-UM-UP), University of Minho, Azurém Campus, Guimarães, Portugal;

² ISISE, Department of Civil Engineering, University of Minho, Guimarães, Portugal;

³ Federal Institute Goiano, Rio Verde, Brazil;

⁴ Digital Transformation CoLab (DTx), Building 1, Campus of Azurém, University of Minho, Guimarães, Portugal;

⁵ Centre of Physics of Minho and Porto Universities (CF-UM-UP), Gualtar Campus, University of Minho, Braga, Portugal

* catiaj_afonso@hotmail.com; iran_segundo@hotmail.com; carneiro@fisica.uminho.pt

Abstract. Titanium dioxide (TiO₂) is a widely used semiconductor for photocatalysis. This captures only a small fraction of sunlight (only about 3%) in the ultraviolet (UV) region thus limiting its efficiency and photocatalytic ability. The large-scale application of TiO₂ nanoparticles has been restricted as it requires an ultraviolet excitation source to achieve a high photocatalytic activity. Incorporating chemical elements into the TiO₂ lattice can tune its band gap, resulting in an edge-shifted red absorption to reduce energies, improving photocatalytic performance in the visible region of the electromagnetic spectrum. In this research, TiO₂ semiconductor nanoparticles were subjected to a doping process using iron chloride (FeCl₃) powder to activate photocatalysis under visible light and consequently improve pollutant capture. To study the effectiveness of the doping process, the main ratios (3:1), (1:1), (1:1.622), (1:3) and (1:4.5) of TiO₂:FeCl₃ were evaluated by measuring the band gap using Diffuse Reflectance Spectroscopy (DRS). Subsequently, X-ray diffraction (XRD) was used to identify the crystalline phase of each material, as well as Fourier-Transform Infrared Spectroscopy (FTIR) to analyse the chemical composition of the doped materials, and Scanning Electron Microscopy (SEM) to investigate the homogenization and dispersion of the samples. The main results of this research show that doping TiO₂ with FeCl₃ shifted the absorption edge to longer wavelength values, changing the optical properties of the material and decreasing the band gap (E_g) of TiO₂ compared to the undoped TiO₂ (reference). There are no relevant differences between the XRD pattern of the samples with TiO₂-FeCl₃ and TiO₂ nanoparticles (reference). The fraction of the anatase phase in doped TiO₂ nanoparticles has the same magnitude as the reference TiO₂. Consequently, there is no significant influence on anatase-to-rutile transformation (ART). Regarding FTIR, the Fe-doping process alters the TiO₂ reference spectrum, especially increasing the intensity of hydroxyl bonds and peaks, indicating the Ti-O-Fe bond vibration.

Keywords: band gap energy, semiconductor nanoparticles, diffuse reflectance, nano-TiO₂, photocatalysis

Thermochromism applied to Transportation Engineering: asphalt roads and paints

Orlando Lima Jr. ^{1,*}, Pedro Cardoso ², Iran Rocha Segundo ^{1,3,*}, Elisabete Freitas ¹,
Manuel F. M. Costa ⁴, Heriberto Nascimento ⁵, Cátia Afonso ³, Salmon Landi Jr. ⁶,
Vasco Teixeira ³, Joaquim Carneiro ^{3,*}

¹ ISISE, Department of Civil Engineering, University of Minho, Guimarães, Portugal;

² Department of Civil Engineering, University of Minho, Guimarães, Portugal;

³ Centre of Physics of Minho and Porto Universities (CF-UM-UP), University of Minho, Azurém Campus, Guimarães, Portugal;

⁴ Centre of Physics of Minho and Porto Universities (CF-UM-UP), University of Minho, Gualtar Campus, Braga, Portugal

⁵ Textile Engineering Department, Federal University of Rio Grande do Norte, Natal, Brazil

⁶ Federal Institute Goiano, Rio Verde, Brazil;

* orlandojunior.jr@hotmail.com; iran_segundo@hotmail.com;
carneiro@fisica.uminho.pt

Abstract. Thermochromic materials change reversibly their optical response with temperature. They have many possible applications in aerospace, military, textiles, and construction. In the road engineering field, thermochromism studies are still incipient, addressing the temperature variation and energy absorption control on pavements to increase their durability. This study explores the application of thermochromism to road engineering from two perspectives. The first one is about the development of functionalized road markings (FRM) working as thermochromic sensors to alert the presence of ice on the road and, in this way, to improve road safety. The second one concerns the functionalization of asphalt pavements for reversible color change at high temperatures to reduce energy absorption in the form of heat and, in this way, mitigate Urban Heat Islands (UHI) effect. For the development of the FRM, thermocapsules with temperature transition (TT) commonly commercialized were added by volume incorporation into acrylic ink, then applied to an AC10 asphalt mixture, submitted to high and low temperatures, and finally visually characterized to attest to the thermochromic behavior. For the functionalization of the asphalt pavement aiming for UHI reduction, thermochromic solutions (TS) containing thermocapsules, dye, and resin were superficially sprayed at an AC10, and performed the Quick Ultraviolet Accelerated Weathering Test (QUV) followed by Colorimetry Analysis. The color coordinates L^* , a^* and b^* were measured as defined by the *Comissione Internationale de l'Éclairage* (CIE), as well as ΔE^* . The results show that it is possible to functionalize road marks to work as a thermochromic sensor. Also, this property can be improved by synthesizing or using thermocapsules with TT closer to the water melting point. The results also indicate that the asphalt pavement functionalization with surface spraying of TS points out to higher luminosity results in terms of color coordinate, which is intended for the mitigation of heat energy absorption, consequently, mitigating the UHI.

Photocatalytic degradation of Malachite green using magnetic zinc and magnesium ferrite nanoparticles functionalized with silver under visible light irradiation

Ricardo. J. C. Fernandes^{1,2,3}; Beatriz D. Cardoso¹; Ana R. Silva^{2,3};
Luciana Pereira^{2,3}; Paulo J. G. Coutinho¹

¹ Physics Centre of Minho and Porto Universities (CF-UM-UP), University of Minho, Campus de Gualtar, 4710-057 Braga, Portugal;

² Centre of Biological Engineering, University of Minho, 4710-057 Braga, Portugal

³ LABBELS – Associate Laboratory, Braga, Guimarães, Portugal

Id9264@alunos.uminho.pt

Abstract. Water pollution is one of the biggest environmental challenges. Anthropogenic pollutants (e.g. pesticides, pharmaceuticals, industrial dyes, Per and Polyfluoroalkyl substances) are each day more and more present in water systems. Due to the inefficiency of conventional wastewater treatment plants to degrade them, the recalcitrant compounds, or their products, end up in rivers, lakes, oceans, and other water bodies [1]. Semiconductor photocatalysis is considered an efficient alternative/complement to conventional methods. This process initiates by semiconductor photon absorption and results in the formation of reactive species that will interact with the pollutant degrading it. The use of different nanomaterials as semiconductors have been widely explored, with special focus on the study of their activity under less energetic wavelengths, as in the visible light spectrum [2]. This work focus on the development of magnetic and photoactive zinc and magnesium mixed ferrites ($Zn_{0.5}Mg_{0.5}Fe_2O_4$), synthesized by two different methods, sol-gel and solvothermal. Due to a high recombination rate of electrons with holes, an intrinsic feature of ferrites, further functionalization is necessary to enhance charge separation. Noble metal surface deposition can promote separation of electrons/holes, promoting the photocatalytic activity [3]. To address the efficiency of the developed nanomaterials, an homemade irradiation set up was used, and the dye malachite green was tested as model pollutant. *Vibrio fischeri* assays were also performed to evaluate the toxicity of the solution resulting from the irradiation experiments.

Keywords: Photocatalysis; Water pollutants; Semiconductors; Visible light;

Acknowledgements: This work was supported by the Portuguese Foundation for Science and Technology (FCT) in the framework of the Strategic Funding of CF-UM-UP (UID/04650/2020), UIDB/04469/2020 unit and COMPETE 2020 (POCI-01-0145-FEDER-006684). R.J.C. Fernandes acknowledges FCT for a PhD grant 2021.08418.BD. Ana Rita Silva holds an FCT grant SFRH/BD/131905/2017 and COVID/BD/15951/2021.

References:

- [1] G. Reichert, S. Hilgert, S. Fuchs, and J. C. R. Azevedo, "Emerging contaminants and antibiotic resistance in the different environmental matrices of Latin America," *Environ. Pollut.*, vol. 255, 2019, doi: 10.1016/j.envpol.2019.113140.
- [2] R. J. C. Fernandes *et al.*, "Magnetic nanoparticles of zinc/calcium ferrite decorated with silver for photodegradation of dyes," *Materials (Basel)*, vol. 12, no. 21, 2019, doi: 10.3390/ma12213582.
- [3] R. J. C. Fernandes *et al.*, "Photodeposition of silver on zinc/calcium ferrite nanoparticles: A contribution to efficient effluent remediation and catalyst reutilization," *Nanomaterials*, vol. 11, no. 4, pp. 1–13, 2021, doi: 10.3390/nano11040831.

Ultrafast spectroscopy of biomolecules in the ultraviolet range

Rocío Borrego-Varillas

Institute of Photonics and Nanotechnologies, CNR (CNR-IFN), Piazza Leonardo da Vinci 32, 20133 Milano (Italy)

rocio.borregovarillas@cnr.it

Abstract. Many molecules involved in biological processes absorb strongly in the ultraviolet (UV) spectral range. A notable example are DNA bases, which have strong absorption bands in this range but present remarkable photo-stability. These chromophores indeed relax in ultrafast time scales (tens of femtoseconds) after UV photo-excitation, preventing photochemical reactions that could end up on a photo-damage of the molecule [1]. In those ultrafast processes, conical intersections (CI) play a crucial role but tracking them is extremely challenging as it calls for ultrashort pulses in the UV range [2]. We have recently demonstrated sub-20 fs pulses in the UV by a scheme based on frequency up-conversion in nonlinear crystals. By combining these pulses with broadband supercontinuum generation driving by the fundamental or its second-harmonic we have set-up a transient UV spectroscopy setup with unprecedented temporal resolution of 20 fs [3]. We have exploited this setup to track the relaxation mechanisms in solvated pyrimidine nucleosides [4]. In particular, we trace the passage of the wave-packet through a CI in uridine and 5-methyluridine. In spite of their similarity (their chemical structure differs only in a methyl group), 5-methyluridine takes an order of magnitude longer. Our results, supported by simulations from first principles based on mixed quantum mechanics /molecular mechanics (QM/MM), allow us to identify ring puckering as the dominant deactivation channel and rationalize the difference in decay times with larger inertia of the methyl group in 5-methyluridine with respect to hydrogen in uridine.

Keywords: ultrafast spectroscopy, femtosecond lasers, molecular dynamics, ultrafast optics

Acknowledgements: Marie Curie Action (project UPDUS, grant agreement n. 328110), Cariplo Foundation (project DINAMO, 2020-4380).

References:

- [1] R. Impronta, T. Douki, “DNA Photodamage: From Light Absorption to Cellular Responses and Skin Cancer”, The Royal Society of Chemistry (2021).
- [2] M. Chergui, J. Chem. Phys. 150, 070901 (2019).
- [3] R. Borrego-Varillas et al., Appl. Sci. 8, 2079(2018).
- [4] R. Borrego-Varillas et al., Nat. Commun. 12, 7285(2021).

Assessment of lipid formulations to develop multi-stimuli-responsive solid magnetoliposomes using fluorescence-based methodologies

Beatriz D. Cardoso^{1,2,3,4*}, Vanessa F. Cardoso^{1,2,3,4},
Senentxu Lanceros-Méndez^{1,2,5,6} and Elisabete M. S. Castanheira^{1,2}

¹ Physics Centre of Minho and Porto Universities (CF-UM-UP), University of Minho, Campus de Gualtar, 4710-057 Braga, Portugal;

² LaPMET—Laboratory of Physics for Materials and Emergent Technologies, University of Minho, 4710-057 Braga, Portugal

³ CMEMS-U Minho, University of Minho, DEI, 4800-058 Guimarães, Portugal

⁴ LABELS—Associate Laboratory, 4800-122 Braga, Portugal

⁵ BCMaterials—Basque Center for Materials, Applications and Nanostructures, UPV/EHU Science Park, 48940 Leioa, Spain

⁶ IKERBASQUE—Basque Foundation for Science, 48009 Bilbao, Spain

* beatrizdiascardoso94@gmail.com

Abstract. The clinical success of liposomes in pharmaceutical sciences has driven the development of new multifunctional approaches for controlled drug delivery. Magnetoliposomes are hybrid lipid-nanoparticle complexes whose interest is based on the ability for magnetic targeting, controlled cargo release induction, thermal therapy potentiation, and theranostics capability. This work is focused on the assessment of lipid formulations to design solid magnetoliposomes (SMLs) as multi-stimuli-responsive vesicles for controlled release of doxorubicin (DOX) in pathological areas under the influence of thermal, magnetic, and pH stimuli [1]. The intrinsic fluorescence of DOX can be used as a facilitating tool for DOX-loaded SMLs characterization. Thus, the fluorescence spectroscopy technique was fundamental to evaluating the effect of lipid formulations on SMLs' properties, such as its encapsulation efficiency. The DOX localization in the lipid bilayer with pH variation was assessed by the simultaneous analysis of its fluorescence intensity variation with the steady-state fluorescence anisotropy (r). The interaction degree between the lipid vesicles and human serum albumin (HSA) allowed to conclude about the stability of formulations under physiological conditions. For that, the fluorescence quenching effect of HSA Trp214 residue, resulting from changes in the conformation of the HSA after interaction with vesicles, was monitored. The results confirm the fundamental role of PEG in enhancing the stealth properties of SMLs. Finally, DOX release kinetics assays were performed in mimetic environments of physiological conditions (37 °C, pH = 7.4) and therapeutic conditions (42 °C, pH = 5.5). The results reinforce the potential of SMLs as stimuli-responsive nanosystems for cancer targeting and therapy.

References:

- [1] Cardoso, B. D., Cardoso, V. F., Lanceros-Méndez, S., and Castanheira, E. (2022). Solid magnetoliposomes as multi-stimuli-responsive systems for controlled release of doxorubicin: assessment of lipid formulations. *Biomedicines*, 10(5), 1207.

Highly selective, compact and efficient vertical in-coupling for interferometric optical biosensors


Ursula F. S. Roggero^{1*}, Ruth E. Rubio-Noriega², Hugo E. Hernández-Figueroa¹

¹ School of Electrical and Computer Engineering, UNICAMP, SP, Brazil

² INICTEL – Universidad Nacional de Ingeniería, Lima, Perú

* uroggero@decom.fee.unicamp.br

Abstract. One of the challenges in using integrated optical biosensors is their ability to operate in environments outside laboratories. This occurs mainly because suitable source coupling components are not considered at the design stage. In this work, a highly selective, compact and efficient in-coupling method is proposed with the aim to develop a genuine Point-of-care (POC) platform. The proposed configuration consists of a single-mode fiber core in parallel and centred above an inverted non-linear taper, which can also be seen as a pigtail input stage. These components are separated by the cladding of the taper that acts as a gap. In this setup, light is coupled from the fiber to the taper, which then becomes the core of a multimode waveguide. The coupled modes depend on the position of the fiber and the geometry of the taper. For interferometric biosensors, the power distribution between the modes is very important because each one reacts differently to the sample placed on the optical transducer. Therefore, the selectivity of the coupling stage affects the detection process. In the model presented in this work, the input is set as the fundamental TE mode of the fiber. Since it is centred, only the even modes are excited in the taper. The width of the taper varies from 2 μm to 3 μm , in order to select only high-order modes, due to their large evanescent tails lead to highly sensitive biosensors. The non-linear format optimizes the design by dividing the entire taper into a cascade of linear sections. Those in which the coupling of the desired modes occurs are prioritized by increasing their lengths, thus making the transition smoother. To select other modes or change the power distribution between them, one may just simply change the width of the taper and the length of the prioritized sections. In this work, a fiber-to-taper configuration of 8 mm length is presented, which couples 48% and 17% of the input power to TE₈ and TE₁₀ modes, respectively.

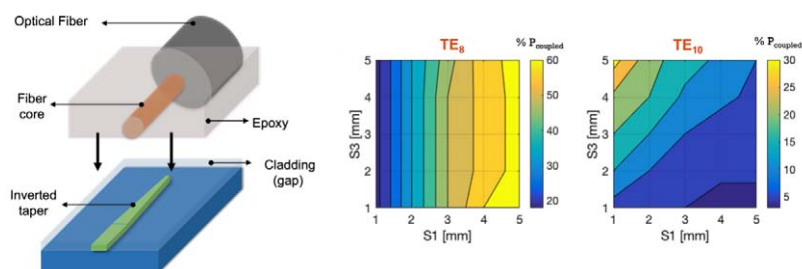

Keywords: Optical fiber, non-linear taper, multimode waveguide, optical biosensor.

Acknowledgements: Brazilian agencies CAPES, FAPESP and CNPq.

Development of an Escherichia coli optical biosensor with computational validation

**Regina Célia S. B. Allil¹*, Paulo Henrique P. da Silva¹, Rafaela N. Lopes¹,
Alexandre S. Allil¹, Alex Dante², Alessandra S. Sbrano³, Maria Eduarda A.
Esteves⁴, Manuela Leal da Silva^{3,4,5}, and Marcelo M. Werneck¹**

¹ Photonics and Instrumentation Laboratory, Electrical Engineering Program,
Universidade Federal do Rio de Janeiro - COPPE/UFRJ, RJ, Brazil

² Integrated Micro and Nanotechnologies Group, International Iberian Nanotechnology
Laboratory, Braga, Portugal

³ Instituto Nacional de Metrologia, Qualidade e Tecnologia, Duque de Caxias, Rio de
Janeiro, Brazil

⁴ Instituto Oswaldo Cruz - IOC/Fiocruz -, Rio de Janeiro, Brazil

⁵ Instituto de Biodiversidade e Sustentabilidade -NUPEM/UFRJ-, Macaé, Rio de
Janeiro, Brazil

* reginaallil@coppe.ufrj.br

Abstract. The biosensor consists of an optical sensing system and an optoelectronic data acquisition system. The sensor's optical system consists of a biochemically functionalized polymer optical fiber (POF-Plastic Optical Fiber) based on Field Evanescent technology. The Evanescent Field technique has been widely adopted in sensing and in this project it was obtained by bending the fiber in a "U" shape, aiming to increase the sensitivity of the biosensor, through the contact of the curved sensor part with the sample. biological. A data acquisition system was developed through an optoelectronic project aiming to increase the sensitivity when compared to a commercial equipment acquisition system.

This work presents a biosensor for the detection of Escherichia coli based on an evanescent field with a polymer optical fiber linked to the analog signal acquisition system through an optoelectronic system developed.

The interaction investigation of antibodies and antigens in Escherichia coli for computational methods was carried out in order to obtain information about the action of the antibody and in future steps apply in validation of the diagnostic method.

Acknowledgements: The authors would like to thank FAPERJ for the financial support.

Design and simulation of 3D printed freeform optics elements

Carlos Vicente¹, David Ferreira^{2,3} and Ana M. Rocha³

¹IDMEC, Instituto Superior Técnico, Universidade de Lisboa, Av. Rovisco Pais 1, 1049-001, Lisbon, Portugal

²University of Aveiro, Campus Universitário de Santiago, 3810-193 Aveiro, Portugal

³Instituto de Telecomunicações and Universidade de Aveiro, Campus Universitário de Santiago, 3810-193, Aveiro, Portugal

amrocha@av.it.pt

Abstract. On this work we will present the planned scenarios for the design and simulation of 3D printed freeform optics (FFO) elements, under the scope of the project "Additive Manufacturing for the next generation of freeform optical components". The design and simulation of 3D printed FFO elements will start with the simulation implementation (numerical models' construction) for some FFO elements, including freeform prisms, toroid lens, acylinder lens, anamorphs, and Alvarez lens. The main goal is the development and implementation of theoretical and numerical models to simulate and design the FFO elements. In a first approach the computational work is being developed using commercial Comsol Multiphysics. The optical characteristics and performance of the FFO will depend on their shape and roughness, which in turn depends on part in the resolution of the 3D printer, as well as on the refractive index of the production material - resin. Firstly, according to the typical printer resolution, the effect of geometric deviations and the surface roughness will be considered in the simulation and in the performance of the FFO elements. Secondly, resins with different refractive indexes will be considered in the design of the FFO elements, along with the mandatory performance assessment. From these two simulation steps, we aim to define an optimized refractive index range for each target application taking into account the limitation of the printer. Lastly, the effect of antireflective coatings will also be considered in the performance assessment of the FFO elements. The obtained results will provide guidelines for the design of 3D printed FFO elements produced by 3D printing, aiming its potential application in technological fields such as: aerospace, automotive, illumination and biomedical engineering.

Keywords: 3D printing, freeform optics, numerical methods, simulation

Acknowledgements: This work was supported by FCT, under IT, project, UIDB/50008/2020-UIDP/50008/2. The authors acknowledge the funding of the AM-OPTICAL project, FCT reference PTDC/EMEEME/4593/2021.

Amorphous Silicon Photonic Integrated Circuit for beam steering in Lidar applications

Alessandro Fantoni^{a,b,*}, Paulo Lourenço^{a,b}, João Costa^{a,b}, Manuela Vieira^{a,b,c}

^a DEETC-ISEL-Instituto Politécnico de Lisboa, 1959-007, Lisbon, Portugal

^b CTS-UNINOVA, 2829-516, Caparica, Portugal


^c DEE-FCT-UNL, Faculdade de Ciências e Tecnologia, 2829-516, Caparica, Portugal

* afantoni@deetc.isel.ipl.pt

Abstract. Different configurations of LIDAR systems have been proposed during the recent years to face the variety of requirements that can be established, depending on the application framework.

Among others, the reduction of mobile mechanical parts and the overall miniaturization of the system can be claimed to improve robustness to harsh environment condition and reduction of the overall power consumption. An optical phased array configuration built on structure developed in a silicon photonic integrated circuit technology, may be able provide a solution to fit these requirements.

Nevertheless, there is some drawback and some fabrication complexity that can be limiting the direct application for automotive solution in a low-cost configuration. At the same time, other application fields, like for example biomedical under skin imaging systems, can be proposed as a possible playground for a silicon photonics Lidar Time-of-Flight working in the near infrared range of wavelengths. In this work, it is presented the design and the simulation of an amorphous silicon phased array working at a wavelength of 1550 nm. Potential and limitation of this approach will be outlined.

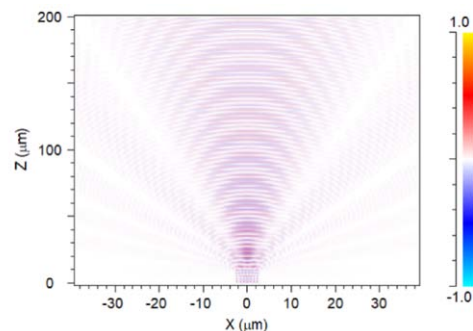

Light Directionality of an a-Si:H Optical Phased Array with seven parallel waveguides.

Keywords: Lidar, Amorphous Silicon, Optical Phased Array.

Acknowledgements: IPL/2021/MuMiAS-2D_ISEL, FEDER European Regional Development Fund project LISBOA-01-0145-FEDER-031311 FCT – Fundação para a Ciência e Tecnologia projects PTDC/NAN-OPT/31311/2017 and UIDB/00066/2020.

Ocular accommodation and wavefront aberration in university students

Alshaarawi Salem, António Baptista, Sandra Franco

Physics Center of Minho and Porto Universities (CF-UM-UP), University of Minho, Portugal

sfranco@fisica.uminho.pt

Abstract. Ocular wavefront aberrations (WA) mainly result from a balance between the cornea and the crystalline lens optical aberrations. It is known that ocular WA play a role in the accommodative response and that they change when accommodation is stimulated. University students are expected to spend significant time performing near vision tasks, leading to an important accommodative effort that can impact the ocular WA. Therefore, it is important to evaluate this impact on the university students during their time at the university.

This study aims to evaluate the impact of the near vision tasks in the vision system by assessing the changes in WA induced by ocular accommodation in university students during the three years of their academic path.

Fifty-four undergraduate students were recruited from the first to the final year of their courses (74% female; 26% male), with a mean age of 20.85 ± 2.94 years. A Hartmann-Shack wavefront aberrometer WAM700+, (Essilor Instruments USA) was used to measure the ocular WA for far and near vision. After the measurements, the ocular aberration values were exported in the form of Zernike coefficients up to the sixth order, and the root-mean-square (RMS) was computed for LOA, HOA Total aberrations.

The changes in Z (2, 0), LOA RMS and total RMS were significantly increased between the first year and third year (P-value <0.05). Moreover, the changes in spherical aberration induced by accommodation also increased over the three years, being statistically significant between the first and the last year ($p = 0.02$). The results suggested that during the three years at the university, the accommodative response suffered an increase impacting the primary spherical aberration for near vision.

Keywords: Ocular accommodation; Ocular optical quality; University students;

Acknowledgment: This work was supported by the Portuguese Foundation for Science and Technology (FCT) in the framework of the Strategic Funding UIDB/04650/2020.

Effect of accommodation on coma at central and peripheral retina

Kishor Sapkota*, Jessica Gomes, Sandra Franco

Centre of Physics, University of Minho, 4170-Braga, Portugal

* kishorsapkota@gmail.com

Abstract. Coma is one of the most common ocular higher order aberrations and highly affects the quality of image. It is assumed that corneal aberrations are balanced by internal (lenticular) aberrations so that retinal image quality may not have great impact. However, during accommodation, the shape, position, and curvature of the crystalline lens changes which might disrupt this balance between internal and corneal aberration. This study aimed to investigate the effect of accommodation on primary coma (C_3^{-1} and C_3^1) and secondary coma (C_5^{-1} and C_5^1) in relaxed and accommodated eyes. Zernike coefficients were measured in 53 subjects with Hartmann-Shack aberrometer both at the central and peripheral retina up to 30° off-axis in horizontal and vertical meridians. The process was repeated with 2.50 D accommodation stimulus and comas were compared with and without accommodation. Root-mean-square of total coma was also assessed. With accommodation, vertical comas changed to more negative value and horizontal comas changed to more positive values in most of the off-axis positions. In contrary, the secondary vertical comas became less negative and secondary horizontal comas became more negative with accommodation in most of the off-axis fixations. Thus, the results showed that accommodation affects coma which depends up on position of the fixation.

Acknowledgement: This work was supported by the Portuguese Foundation for Science and Technology (FCT) in the framework of the Strategic Funding UID/FIS/04650/2019 and by the project PTDC/FIS-OTI/31486/2017 and POCI-01-0145-FEDER-031486.

References:

- [1] Fan R et al 2012 Comparison of wavefront aberrations under cycloplegic, scotopic and photopic conditions using WaveScan *Arq. Bras. Ophthalmol.* **75** 116-21
- [2] Kasthurirangan S et al 2011 MRI study of the changes in crystalline lens shape with accommodation and aging in humans *J. Vis.* **11** 3
- [3] Plainis S et al 2005 The effect of ocular aberrations on steady-state errors of accommodative response *J. Vis.* **5** 466-477
- [4] Atchison DA et al 2007 Measuring ocular aberrations in the peripheral visual field using Hartmann – Shack aberrometry *J. Opt. Soc. Am.* **24** 2963-2973
- [5] Sapkota K, Gomes J and Franco S 2022 Effect of Accommodation on Peripheral Higher Order Aberrations *Photonics* **9**:64
- [6] Cheng H et al 2004 A population study on changes in wave aberrations with accommodation *J. Vis.* **16** 4
- [7] Dubbelman M et al 2005 Change in shape of the aging human crystalline lens with accommodation *Vision Research* **45** 117-132
- [8] Zhou X et al 2015 Wavefront aberration changes caused by a gradient of increasing accommodation stimuli *Eye* **29** 115-121
- [9] Hartwig A et al 2011 Peripheral aberration measurements: elliptical pupil transformation and variations in horizontal coma across the visual field *Clin. Exp. Optom.* **94** 443-451

Influence of absorptive tinted filter lenses on contrast sensitivity in healthy participants under three different environmental conditions

**Adrian Perez-Baladron, Andrea Salgado-Núñez, Jacobo Garcia-Queiruga,
Hugo Pena-Verdeal, Eva Yebra-Pimentel**

Departamento de Física Aplicada (Área de Optometría), Facultade de Óptica e
Optometría Universidade de Santiago de Compostela, Santiago de Compostela, Spain

hugo.pena.verdeal@usc.es

Abstract. Purpose: The present study aimed to analyse the influence of absorptive tinted filter lenses on Contrast Sensitivity (CS) in healthy participants under three different environmental conditions. Methods: 10 Healthy qualified volunteers who fulfilled the inclusion/exclusion criteria were recruited: refractive spherical error between +2.00 and -4.00D, refractive cylindrical error less than 1.00 D, Best Corrected Visual Acuity (BCVA) ≥ 1.0 and Low Vision Quality of Life (LVQOL) score ≥ 50 . Participants were scheduled for three-session under different environmental conditions where CS was measured with a Pelli-Robson chart with and without five (ML Filters 450, 500, 511, 527 and 550) absorptive tinted filters lenses: 1) indoor, 2) outdoor on a sunny day, 3) outdoor on a rainy day. The filters were always introduced in the same order, from the higher absorption filter (ML Filter 550) to the lower (ML Filter 450). Results between filters and environmental conditions were compared. Results: There was a statistical difference in the CS values obtained with and without a filter in the measurements performed in all environmental conditions (Friedman test: all $p < 0.001$) with no differences in the pairwise analysis between filters (Wilcoxon test; all ≥ 0.009). There was no statistically difference in the CS values between environmental conditions without filters or with any of the filters (Friedman test: all $p \geq 0.097$). Conclusions: The present study found that coloured filter lenses between 450 and 550 nm wavelength absorption had minimal impact on CS in healthy participants.

Keywords: contrast sensitivity, absorptive tinted filter. Low-vision.

Meibomian gland loss area and its relationship with eyelid margin hyperemia and MG orifice plugging

Jacobo Garcia-Queiruga, Belén Sabucedo-Villamarin, Hugo Pena-Verdeal, Carlos Garcia-Resua, M. Jesus Giraldez, Eva Yebra-Pimentel

Departamento de Física Aplicada (Área de Optometría), Universidade de Santiago de Compostela, Santiago de Compostela, Spain

jacobogarcia.queiruga@usc.es

Abstract. Purpose: The aim of the present study was to state a relationship between the meibomian gland loss area (MGLA), eyelid hyperemia and meibomian gland (MG) orifices plugging in a sample of university students. Material and methods: A total of 74 participants were recruited. Meibography images were obtained with the OCULUS® Keratograph 5M and MGLA was calculated using the ImageJ software; also, MGLA was categorized following the Meiboscale into 4 groups: group 1 (<25%), group 2 (25-50%), groups 3 (50-75%), and group 4 (>75%). An exhaustive slit lamp examination of both eyelids was performed. Eyelid margin hyperemia and MG orifices plugging of each eyelid were categorized following Arita et. al grading scales. Results: A significant statistical relationship was found between MG orifices plugging and MGLA for both eyelids (Fisher's exact test; both $p < 0.019$). Also, correlations were obtained between lower MGLA and lower MG orifices plugging (Cramer-V = 0.583, $p \leq 0.001$); and between upper MGLA and upper eyelid margin hyperemia (Cramer-V = 0.418, $p = 0.023$), and upper MG orifices plugging (Cramer-V = 0.413, Fisher's exact test: $p = 0.042$). Conclusion: MGLA varies depending on MG orifices plugging provoking the subsequent eyelid margin hyperemia.

Keywords: Meibomian Glands, Orifices Plugging, Meibography, Eyelid Margin Hyperemia

Differences in the values of Anaglyphs, vectograms and cheirosopes on participants with low, normal, and high AC/A ratio

**Hugo Pena-Verdeal, Veronica Noya-Padin, Noelia Nores-Palmas,
Belen Sabucedo-Villamarin, Maria Jesus Giraldez**

Departamento de Física Aplicada (Área de Optometría), Facultade de Óptica e
Optometría Universidade de Santiago de Compostela, Santiago de Compostela, Spain

hugo.pena.verdeal@usc.es

Abstract. Purpose: Anaglyphs, Vectograms and Cheirosopes are visual therapy materials based on red/green, polarized, or black/white targets that used similar but slightly different images for each eye to train fusion and vergence skills. This study aimed to analyse the differences in the results obtained on those devices on participants with low, normal, or high AC/A ratios. Material and methods: three groups of volunteer participants were recruited based on their recent clinical history among patients attending the Optometry Clinic of the centre: 15 participants with low AC/A, 15 participants with normal AC/A and 15 participants with High AC/A ratios. None of them was under any type of medication, have an ocular or systemic disease, or were performing any kind of visual training plan that could affect the study. In two sessions one week apart, following manufacturer's instructions, the participants performed in a random order three visual therapy device-based training: one red/green Fixed Demand Anaglyph [FDA], one Variable Demand Polarized Vectogram [VDPV], and the based on the Wheatstone W [WW]. Participants were instructed to indicate the maximum value base-out (BO) where both image fusion and clarity was lost. Results between both sessions were compared with an analysis of differences. Results: There was found higher BO vergences results with the three devices regarding the second to the first session in the Low and Normal AC/A groups (t-test for paired samples, all $p \leq 0.006$), but none in the High AC/A group (t-test for paired samples, all $p \geq 0.154$). Conclusion: There is an enhancement of BO vergences in Low and normal AC/A participants but not in high AC/A participants by performing visual training with Anaglyphs, Vectograms and Cheirosopes devices.

Keywords: AC/A ratio, Fixed Demand Anaglyph, Variable Demand Polarized Vectogram, Wheatstone W

Comparison of three methods for measuring far and near vision heterophoria in free space

Noelia Nores-Palmas,* Veronica Noya-Padin, Eva Yebra-Pimentel,
Hugo Pena-Verdeal, Maria Jesus Giraldez

Departamento de Física Aplicada (Área de Optometría), Faculdade de Óptica e
Optometría, Universidade de Santiago de Compostela, Santiago de Compostela, Spain

* noelia.nores@rai.usc.es

Abstract. Purpose: The aim of the present study was to evaluate the agreement between three methods to measure far and near vision horizontal heterophoria in free space. Material and methods: A sample of 40 healthy young subjects was recruited for the present study. Participants attended a single session where far and near vision phoria were measured with three different devices (Cover Test, Modified Thorington test and OptoTab SERIES) under the same conditions of environmental lighting, primary viewing point and best refractive correction. Two examiners conducted the tests in random order to avoid variables like fatigue or practice. The results of the three methods were compared by Friedmann and Wilcoxon test. Results: Significant differences were found between the three methods in far vision measurements (Friedmann test; $p < 0.001$), whereas no between Cover Test and OptoTab POLAR when differences between pairs were checked (Wilcoxon test; $p = 0.735$). No significant differences were found between the three methods in near vision measurements (Friedmann test; $p = 0.504$). Correlations were weak between methods for far vision phoria, but good between methods for near vision phoria, particularly between the Cover Test and the Modified Thorington test ($r = 0.852$; $p < 0.001$) Conclusion: The three devices are interchangeable for near vision measurements while this condition is only true for Cover Test and OptoTab POLAR on far vision.

Keywords: heterophoria, Cover Test, Modified Thorington test, OptoTab SERIES

Analysis of the Interferential Lipid Pattern change through 4 and 6 years in Dry Eye Disease patients

Belén Sabucedo-Villamarín, Jacobo Garcia-Queiruga, Hugo Pena-Verdeal, Carlos García-Resua, M. Jesús Giraldez, Eva Yebra-Pimentel.

Departamento de Física Aplicada (Área de Optometría), Facultade de Óptica e Optometría Universidade de Santiago de Compostela, Santiago de Compostela, Spain

belen.sabucedo@rai.usc.es

Abstract. Purpose: Dry Eye Disease (DED) is a chronic disease with a high prevalence among the global population and an increasing public health problem. No large number of studies describes the natural course of the disease. The aim of the present study was to analyse the evolution of the interference Lipid Layer Pattern (LLP) in a 4- and 6-year period on untreated DED patients. Material and methods: The sample was formed by 80 untreated DED patients divided in two groups (40 patients each). Patients were examined in two sessions: the first session was the basal, and the second session was performed in two periods (4 or 6-years since the basal session). Patients attending to the second session in the 4-years period formed Group 1, thus patients that attend in the 6-years period formed Group 2. The LLP was evaluated with the Tearscope-plus in both sessions. The LLP was classified following 3 different scales: the Guillon's Scheme, Guillon's Scheme with intermediate patterns and the Colour Scheme. Results: values were significantly lower for Group 1 in session 2 in all the scales: the Guillon's scheme ($p=0.007$), the Guillon's Scheme with intermediate patterns ($p=0.009$) and the Colour Scheme ($p=0.018$). The values for Group 2 were significantly lower in session 2 in all the scales: in the Guillon's Scheme ($p=0.008$), the Guillon's Scheme with intermediate pattern ($p=0.003$) and the Colour Scheme ($p=0.003$). Conclusion: In untreated DED patients after 4 and 6 years, the LLP turns thinner showing a worsening of the disease during its progression.

Keywords: Dry eye disease, Tearscope, Tear film, Lipid layer pattern.

Hyperspectral Colorimetry of in-vivo dental structures

Tejada-Casado, Maria^a; Ruiz-López, Javier^a; Cardona, Juan C^{a*};
Martínez-Domingo, Miguel Ángel^a; Ionescu, Ana M^a; Ghinea, Razvan^a

^a Department of Optics, Faculty of Science, University of Granada, Campus de Fuentenueva, s/n 18071 Granada, Spain. mariatejadac@ugr.es; jruizlo@ugr.es; cardona@ugr.es; martinezm@ugr.es; aionescu@ugr.es; rghinea@ugr.es

* cardona@ugr.es

Abstract. Accurate determination of tooth color is necessary to reproduce natural appearance of teeth in dental restorations. Hyperspectral imaging can provide point-by-point reliable reproduction of the colorimetric properties of the tooth surface. The aim of this work is to use a hyperspectral capture method to develop a mapping system for the analysis and colorimetric characterization of in-vivo teeth.

Material and Methods. Hyperspectral captures (Specim IQ, 400-1000 nm, 3nm spectral-resolution, 512x512px spatial-resolution) of in-vivo upper central (UCI) and lateral incisors (ULI) belonging to 15 subjects (45°/0° illumination/measuring geometry; D65 LED programmable light source) were performed. CIE L*a*b* chromatic coordinates were calculated for incisal (*I*), middle (*M*) and cervical (*C*) third of each tooth. ΔE_{ab}^* and ΔE_{00} total color differences were computed between different teeth and teeth areas and compared with corresponding perceptibility (PT) and acceptability thresholds (AT).

Results. Very small color differences were found between UCIs or UCLs of the same patient. UCIs exhibited higher L* and lower b* and a* values compared with UCLs, indicating a brighter and less chromatic appearance. Mean ΔE_{ab}^* and ΔE_{00} between UCI and UCL exceeded corresponding PT and AT ($\Delta E_{ab}^* = 7.29-7.79$; $\Delta E_{00} = 6.37-6.81$). Large chromatic variations between *I*, *M* and *C* areas of the same tooth were found. For UCIs, L* coordinate increased from *C* to *M*. UCLs had a similar behaviour, with a slight decrease of L* for the *I* third, due to different anatomy. There was a continuous decrease from *C* to *I* third of a* and b* values. Color differences between tooth areas exceed both PT and AT ($\Delta E_{ab}^* = 7.12-10.06$ and $\Delta E_{00} = 5.17-8.59$).

Conclusion. The use of a hyperspectral camera has proven to be a reliable and effective method for color mapping of in-vivo natural teeth, allowing a complete and integrated evaluation of different teeth or different areas of the same tooth.

Keywords: Hyperspectral Imaging, Color, Dentistry, Optical Properties.

Acknowledgements: The authors acknowledge funding support from research projects P20-00200 and A.TEP.280.UGR18 from the Government of Andalusia, Spain, and PGC2018-101904-A-I00 from the Spanish Ministry of Science, Innovation and Universities, Spain.

Reservoir computing with nonlinear optical media

**Tiago D. Ferreira^{1,2}, Nuno A. Silva^{1,2}, Duarte Silva^{1,2}, Carla C. Rosa^{1,2},
and Ariel Guerreiro^{1,2}**

¹ Department of Physics and Astronomy, Faculty of Sciences, University of Porto, Rua do Campo Alegre, 4169-007 Porto, Portugal.

² INESC TEC, Centre of Applied Photonics, Rua do Campo Alegre 687, 4169-007 Porto, Portugal

tiagodsferreira@hotmail.com

Abstract. Reservoir computing is a versatile approach for implementing physically Recurrent Neural networks which take advantage of a reservoir, consisting of a set of interconnected neurons with temporal dynamics, whose weights and biases are fixed and do not need to be optimized [1]. Instead, the training takes place only at the output layer towards a specific task. One important requirement for these systems to work is nonlinearity, which in optical setups is usually obtained via the saturation of the detection device.

In this work, we explore a distinct approach using a photorefractive crystal as the source of the nonlinearity in the reservoir. Furthermore, by leveraging on the time response of the photorefractive media, one can also have the temporal interaction required for such architecture. If we space out in time the propagation of different states, the temporal interaction is lost, and the system can work as an extreme learning machine. This corresponds to a physical implementation of a Feed-Forward Neural Network with a single hidden layer and fixed random weights and biases [2]. Some preliminary results are presented and discussed.

Keywords: Extreme learning machines, Reservoir computing, Photorefractive media, Nonlinear optical media

Acknowledgements: This work is financed by National Funds through the Portuguese funding agency, FCT - Fundação para a Ciência e a Tecnologia, within project UIDB/50014/2020. T.D.F. is supported by Fundação para a Ciência e a Tecnologia through Grant No. SFRH/BD/145119/2019. N.A.S. also acknowledges the financial support of the project “Quantum Fluids of Light in Hot Atomic Vapors”, supported by FCT in collaboration with the Ministry of Education, Science and Technological Development of the Republic of Serbia.

References:

- [1] Daniel J. Gauthier, Erik Bollt, Aaron Griffith and Wendson A. S. Barbosa. “Next generation reservoir computing”. *Nat Commun* 12, 5564 (2021). <https://doi.org/10.1038/s41467-021-25801-2>
- [2] G.Huang, Q. Zhu, and C. Siew. “Extreme learning machine: a new learning scheme of feedforward neural networks”. *IEEE International Joint Conference on Neural Networks*. (2016) 10.1109/IJCNN.2004.1380068

Detection of Acetic Acid Using a Balloon-type Optical Fibre Sensor

Ana I. Freitas ^{1,2,*}, Jörg Bierlich ³, Jens Kobelke ³, José C. Marques ^{1,2},
and Marta S. Ferreira ^{2,4}

¹ Faculty of Exact Sciences and Engineering & ISOPlexis – Center for Sustainable Agriculture and Food Technology, University of Madeira, Campus Universitário da Penteadá, 9020-105 Funchal, Portugal; ² i3N, University of Aveiro, Campus Universitário de Santiago, 3810-193 Aveiro, Portugal; ³ Leibniz Institute of Photonic Technology IPHT, Albert-Einstein-Str. 9, 07745 Jena, Germany; ⁴ Department of Physics, University of Aveiro, Campus Universitário de Santiago, 3810-193 Aveiro, Portugal.

ana.isabel.freitas@staff.uma.pt

Abstract. Food security and safety are an issue of growing concern to our society. Acetic acid is a compound that is often used as a food preservative and additive, but it is also produced during food processing and constitutes an important marker of food quality. Traditional methods of analysis such as chromatography, spectroscopy, or immunology assays, while accurate, sensitive, and selective, are also costly and time-consuming. Optical fibre sensors have emerged as a promising and versatile alternative for the detection of food contaminants, with several advantages over traditional methods, providing fast and sensitive responses, while remaining relatively small and inexpensive. In this work, we propose a balloon-shaped optical fibre sensor, consisting of a section of capillary tube spliced between two sections of single-mode fibre, for the simultaneous measurement of refractive index and temperature. The sensor was characterised in regard to its response to the refractive index, using thirteen aqueous solutions of increasing concentrations of acetic acid in the range of 0 to 60% (v/v), and to its response to temperature in the range between 22.7 and 48.0 °C. A sensitivity of 5 pm/°C was attained for temperature. Measurements were performed at 1594.8 nm, providing a maximum sensitivity of 181.2 nm/RIU for the refractive index variations, with a resolution as low as 1.35×10^{-5} RIU.

Keywords: Balloon-shaped sensor, refractive index sensing, temperature sensing, acetic acid.

Acknowledgements: This work was financially supported by the project AROMA, funded by FEDER, through CENTRO2020-Programa Operacional Regional do Centro, CENTRO-01-0145-FEDER-031568, and by national funds (OE), PTDC/EEI-EEE/31568/2017, UIDB/50025/2020 & UIDP/50025/2020, through FCT/MCTES. The work of A. I. Freitas and M. S. Ferreira was supported by the research fellowships SFRH/BD/145262/2019 and CEEC-IND/00777/2018, respectively. The work was also funded by the German Federal Ministry of Education and Research (BMBF): “The Innovative Growth Core TOF” (Tailored Optical Fibers, FKZ 03WKCV03E) as well as the bilateral cooperation FCT/DAAD (FLOW, Project ID: 57518590).

Autonomous Optical Tweezers: from automatic trapping to single particle analysis

Felipe Coutinho, Joana Teixeira, Vicente Rocha, João Oliveira, Pedro A. S. Jorge, Nuno A. Silva

Departamento da Faculdade de Ciências da Universidade do Porto, Rua do Campo Alegre 687, 4169-007 Porto, Portugal
Center for Applied Photonics, INESC TEC, Rua do Campo Alegre 687, 4169-007 Porto, Portugal

felipe.c.moreira@inesctec.pt

Abstract. Optical trapping (OT) is a versatile and non-invasive technique for single particle manipulation. As such, it can be widely applied in the domains of particle identification and classification and thus used as a tool for monitoring physical and chemical processes. This creates an opportunity for integrating the method seamlessly into optofluidic chips, provided it can be automatized. Yet, even though OT is well established in multiple scientific domains, a full stack approach to its integration into other technological devices is still lacking. This calls for solutions in tasks such as automatic trapping and signal analysis.

In this poster presentation, we describe the implementation of an algorithm seeking autonomous particle location and trapping. The methodology is based upon image-processing, allowing for particle location using real time image segmentation. A local thresholding algorithm is applied, followed by morphological techniques for closing shapes and excluding non-bounded regions – after which only the particles remain on the image. Once the centroid is identified, the stage is translated accordingly by piezo-electric actuators, followed by the laser activation. In this way, trapping is achieved, and one may proceed to analyze the forward scattered optical signal, after which a new particle inside the actuators range may be automatically trapped.

This development, when compared with existent solutions involving holographic optical tweezers, allows for similar capabilities without using a spatial light modulator, thus dramatically reducing the setup costs of autonomous OT solutions. Therefore, when combined with particle classification techniques, this method is well suited for integration into possible optofluidic chips for autonomous sensing and monitoring of biochemical samples.

Keywords: Optical Tweezers, Optical Trapping, Signal Processing, Machine Learning

Acknowledgements: This work is financed by the ERDF - European Regional Development Fund through the Operational Programme for Competitiveness and Internationalisation - COMPETE 2020 under the Portugal 2020 Partnership Agreement and by National Funds through the FCT - Fundação para a Ciência e a Tecnologia, I.P. (Portuguese Foundation for Science and Technology) within project MYTAG, with reference PTDC/EEI-EEE/4832/2021 and within project UIDB/50014/2020.

References:

- [1] Carvalho, Inês Alves, et al. “Particle Classification through the Analysis of the Forward Scattered Signal in Optical Tweezers.” *Sensors* 21.18 (2021): 6181

Absorption and scattering coefficients in the 240-780nm range of daily disposable contact lenses

Ruiz-López, Javier^a; Tejada-Casado, Maria^a; Ionescu, Ana M^{a*}; Torres, Maria^a; Cardona, Juan C^a; Ghinea, Razvan^a

^a Department of Optics, Faculty of Science, University of Granada, Campus de Fuentenueva, s/n 18071 Granada, Spain. jruizlo@ugr.es; mariatejadac@ugr.es; anaionescu@ugr.es; tpmaria94@gmail.com; cardona@ugr.es; rgghinea@ugr.es

* anaionescu@ugr.es

Abstract. The constant growth in prescription of daily disposable (DD) Ultraviolet (UV)-blocking soft contact lenses (SCL) requires an in-depth study and understanding of their optical properties. The Inverse-Adding-Doubling (IAD) method, allow fast and accurate measurements of a large variety of optical properties. The main objective of the present work is to make a comparative evaluation of the absorption (μ_a) and scattering (μ_s) coefficients of different types of UV-absorbing DD SCLs.

Material and Methods. Four different UV-blocking DD SCLs (BVP -0.5D; n=3) were studied: Somofilcon A (CC; CooperVision); Etafilcon A (AM; Johnson&Johnson); Ocufilecon and Filcon V3 (SH and SS; Servilens). Absorption and scattering coefficients within 240 - 780nm range were derived from the spectral diffuse transmittance and reflectance measurements using the IAD method set-up (two coupled integrating spheres (60mm diameter), Xenon UV-VIS-NIR light source, two fiber-coupled identical spectrometers).

Results. For the 240-380nm range, high μ_a (peak between 350-360nm) and high μ_s values were found for all DD SCLs. The highest μ_a values were found for AM, followed by CC, SS and SH all with similar values but considerably lower than AM. AM lenses were also the most light dispersing, followed closely by CC, while SS and SH exhibited similar μ_s values but considerably lower than AM and CC. For the visible range, μ_a and μ_s values for all DD SCLs were low (with a slight increase of μ_s for wavelengths > 550nm), therefore not affecting their optical quality and performance

Conclusion. Although the amount of absorbed or scattered light differed, all tested DD SCLs comply with claimed UV-blocking, as they exhibited high absorption and scattering in the UV-range. For the visible range, all lenses efficiently transmit light, as shown by low μ_a and μ_s values. Among tested DD SCLs, Etafilcon A were the best performing, from an optical point of view.

Keywords: Absorption coefficient, Scattering coefficient, Inverse Adding Doubling, Contact lenses, UV

Acknowledgements: The authors acknowledge funding support from research projects: P20-00200 from the Government of Andalusia, Spain; PGC2018-101904-A-I00 from the Spanish Ministry of Science, Innovation and Universities, Spain; A.TEP.280. UGR18 grant from the University of Granada, Spain.

Guiding losses estimation in hydrogel-based waveguides

**Carolina Pons¹, Juan Carlos Martín¹, Juan Antonio Vallés¹, Pilar Prieto²,
Iván Torres-Moya², Sonia Merino², Josué Muñoz³, Ester Vázquez³
y María Antonia Herrero³**

¹ Departamento de Física Aplicada-I3A, Universidad de Zaragoza, 50009 Zaragoza, España

² Departamento de Química Inorgánica, Orgánica y Bioquímica, Facultad de Ciencias y Tecnologías Químicas-IRICA, Universidad de Castilla-La Mancha, 13071 Ciudad Real, España

³ Instituto Regional de Investigación Científica Aplicada (IRICA), UCLM, 13071, Ciudad Real, España

juanval@unizar.es

Abstract. The use of waveguides based on hydrogels for clinical therapy is arousing great interest in the field of medicine and optogenetics, as they allow the distribution of light several centimeters deep in human tissues, without causing damage to the patient [1,2].

A key parameter to determine its applicability is the attenuation experienced by the optical power along the waveguide. The well-established cut-off method, in which the output power is measured for progressively shorter waveguide lengths, has a number of drawbacks: it is destructive, requires longer samples and requires a certain time to prepare the sample between measurements.

In this work, an alternative method of measuring the attenuation in hydrogel waveguides through the recording of the power laterally diffused by the sample, which can be considered proportional to the guided power, is studied. Samples with CN monomers dissolved in water were used, having reached an equilibrium state. Three lasers centered at 450 nm, 532 nm and 633 nm were used to excite the hydrogel-based waveguides. A computer-controlled Canon EOS 1000D camera was used, allowing independent detection in the R, G and B channels. For each sample, pictures were taken seeking maximum contrast without reaching saturation.

First, attenuation values measured by means of both methods were compared and a difference of less than a 5% was obtained. Then, knowing the response curve of the CCD of the camera, from the recorded data the relative exposure was extracted and by fitting its longitudinal evolution to an exponential decay the attenuation coefficients were determined for the three channels. Finally, by using the absorbance spectrum and Rayleigh law, the losses contributions (absorption, scattering and guiding) can be uncoupled and coefficients for each of the contributions can be obtained. CN+H₂O (eq)-based waveguide guiding losses are estimated to be below 0.1 dB/cm.

Keywords: hydrogel-based waveguides, attenuation, guiding loss

References:

- [1] J. Feng et al., *Advanced Functional Materials*, 30, p. 1 (2020).
- [2] M. Choi et al., *Nature Photonics*, 7, p. 987 (2013).

Noise analysis in self-interference incoherent digital holography

Elena Stoykova¹, Kihong Choi², Joongki Park²

¹Institute of Optical Materials and Technologies, Bulgarian Academy of Sciences, Acad. Georgi Bonchev Str., Bl.109, 1113 Sofia, Bulgaria

²Electronics and Telecommunications Research Institute, 218 Gajeong-ro, Yuseong-gu, Daejeon, 34129, Republic of Korea

elena.stoykova@gmail.com

Abstract. Self-interference incoherent digital holography (SIDH) has been intensively developed over the last 15 years for 3D imaging [1]. In SIDH, each point of the 3D object under spatially incoherent illumination emits a spherical wave which is split into two mutually coherent spherical waves with different radii that interfere on the optical sensor plane. The sensor records incoherent summation of the holograms created by all objects points. For inline SIDH, at least three phase-shifted incoherent holograms are recorded to build a complex valued hologram for reconstruction without the zero-order and the twin image.

Regardless of the way the SIDH system is implemented (splitting based on usage of SLM, interferometer or geometric phase lens), it is characterized by a high noise level and granular-like reconstructions. Despite the significance of the noise issue, the in-depth noise analysis in these systems is still missing, although analytical evaluation of using a broadband source and of the sensor sampling impact has been made and approaches for noise reduction by averaging have been reported. In the present work, we analyze the noise impact by numerical modelling of recording and reconstruction in a SIDH system. Angular spectrum approach is applied for modelling light propagation between the optical elements in the system. Additive detection noise is generated independently for four phase-shifted holograms according to the known noise models appropriate for CCD/CMOS cameras. Simulation includes monochromatic and broadband illumination. Noise behaviour at reconstruction of a single point source, different number of separate point sources and plane objects is studied and compared to experimental data.

Keywords: digital holography, incoherent, self-interference, modelling

Acknowledgements: This work was supported by IITP grant funded by the Korea government (MSIT) (No. 2019-0-00001, Development of Holo-TV Core Technologies for Hologram Media Services). E. Stoykova thanks European Regional Development Fund within the Operational Programme “Science and Education for Smart Growth 2014–2020” under the Project CoE “National center of Mechatronics and Clean Technologies” BG05M2OP001-1.001-0008. (times, size 9).

References:

- [1] Joseph Rosen, A. Vijayakumar, Manoj Kumar, Mani Ratnam Rai, Roy Kelner, Yuval Kashter, Angika Bulbul, and Saswata Mukherjee, “Recent advances in self-interference incoherent digital holography,” *Adv. Opt. Photon.* 11, 1-66 (2019).

Thermoelectric imaging using photothermal radiometry of carriers, photoluminescence mapping in aged samples of GaAs:Sn

S. Zambrano-Rojas *, J. Sierra-Ortega¹, G. Fonthal R², M. Rodriguez³

* Centro de Investigaciones Universidad de la Guajira, Riohacha – Colombia

¹ Universidad del Magdalena, Santa Marta-Colombia

² Laboratorio de Optoelectrónica, Universidad del Quindío, Armenia-Colombia

³ Centro de Física Aplicada y Tecnología avanzada UNAM.

szambrano@uniguajira.edu.co, gfonthal@hotmail.com, jsierraortega@gmail.com,
marioga@fata.unam.mx com

Abstract. In the present work, the results of images obtained by non-destructive and non-contact spectroscopic techniques are reported for the evaluation of photothermal radiometry of carriers (RFP) in the frequency domain, a rapid photoluminescence mapping system (RPM2000), in aged samples of GaAs: Sn. The techniques were applied at room temperature, for the optical characterization of aged GaAs semiconductor samples, doped with different concentrations of tin (Sn) impurities. These samples have been studied in order to establish their thermoelectronic and photoluminescent homogeneity, taking into account aging under ambient conditions. It was found that aging caused a defect associated with a band other than and that this defect depends on the type and concentration of the impurities.

Keywords: Resonant tunnelling diode, optoelectronic oscillator, laser diode, injection locking

References:

- [1] R. Velázquez H, Obtención de Imágenes Termicase y Termoelectrónicas de Materiales Semiconductores por medio de Radiometría Fototermica Infrarroja y de Radiometría de fotoportadores, Tesis Maestría Universidad Nacional Autónoma de México, México D F (2007) .
- [2] I. Rojas. R, Aplicaciones de Radiometría Fototérmica Infrarroja en la caracterización de Materiales Semiconductores y Metálicos Tesis doctorado, Instituto Politecnico Nacional, México D F (2004)
- [3] F. J. Racedo, Crescimento Epitaxial Seletivo De Estruturas Semicondutoras III-V Visando A Integração Optoeletrônica. Tesis doctorado, Pontificia Universidade Católica do Rio de Janeiro, Rio de Janeiro, (2000).
- [4] Fonthal Rivera Gerardo, Impurificación de capas epitaxiales de GaAs y AlGaAs en el rango de leve hasta fuerte dopaje, por medio de Fotoluminiscencia fotorreflectancia, Tesis Doctoral, Universidad del Valle, Colombia (2001)
- [5] Bhattacharya PT, et al. Eficacia del láser de diodo de arseniuro de galio en el tratamiento de 2 casos de liquen plano oral. Actas Dermosifiliogr. 2018.
- [6] Cristhian Manuel Duran Acevedo, Optimización de una Célula Solar de GaAs/AlGaAs Bistua:Revista de la Facultad de Ciencias Básicas.2018.16(1):145-155
- [7] Torres Delgado Gerardo, Crecimiento de películas semiconductoras del grupo III-V por Epitaxia en Fase Líquida, tesis Doctoral, Centro de Investigación y estudios Avanzados del IPN México.(1989).

Methods of optical fibre probes machining for holographic micro-endoscopy

Miroslav Stibůrek¹, Tomáš Pikálek¹, Petra Ondráčková¹, Petr Ják¹
and Tomáš Čížmár^{1,2,3}

¹ Institute of Scientific Instrument of the CAS, Královopolská 147, Brno, Czech Republic

² Leibniz Institute of Photonic Technology, Albert-Einstein-Straße 9, Jena, Germany

³ Institute of Applied Optics, Friedrich Schiller University Jena, Fröbelstieg 1, Jena, Germany

stiburek@isibrno.cz

Abstract. With the use of state of the art light microscopy methods, we can image the tissue with sub-cellular resolutions down to 1.5 μm . Beyond this reach, the light must be delivered to the target region by optical relay elements inserted into the tissue – the fibre endoscopes. [2,3] With fibre micro-endoscopes, we can reach depth down to 5 mm (mostly the bottom of a living mouse brain) with negligible tissue disruption and keep the resolution equal to 1 micrometre, still sufficient for in vivo microscopy. [3] We designed a custom-made device for optical fibre tips machining. The presented poster will focus on optical fibre probe manufacturing (stripping, etching, polishing, splicing and coating) and on their impact on imaging quality and performance [1].

Keywords: optical fibre, micro-endoscopy, etching, polishing, splicing.

Acknowledgements: The work was supported from European Regional Development Fund-Project “Holographic endoscopy for in vivo applications” (No. CZ.02.1.01/0.0/0.0/15_003/0000476).

References:

[1] Beatriz M. Silveira., Opt. Express 29, 23083-23095 (2021);

[2] Turtaev S. Optics Express 29, 29874 (2021);

[3] Čížmár T., Nature Photonics 9 (2015).

Integrating Laser induced breakdown spectroscopy and photogrammetry towards 3D element mapping

Pedro Rodrigues, Tomás Lopes, Rafael Cavaco, Diana Capela, Miguel Ferreira, Pedro A. S. Jorge, Nuno A. Silva

Departamento de Física e Astronomia da Faculdade de Ciências da Universidade do Porto, Rua do Campo Alegre 687, 4169-007 Porto, Portugal
Center for Applied Photonics, INESC TEC, Rua do Campo Alegre 687, 4169-007 Porto, Portugal

pedro.rodrigues@inesctec.pt

Abstract. Laser-Induced Breakdown Spectroscopy (LIBS) is a well-established analytical technique based on the spectroscopic analysis of the radiation emitted by an induced plasma created after laser pulse ablation of a sample. Being localized at the focal spot, the technique allows timely surface and volumetric elemental mapping of the sample with micrometer precision collected at high acquisition rates. After the acquisition process, versatile visualization tools are of paramount importance for the interpretation of the results. Nevertheless, while solutions for 2D distributions[1] are available commercially and can be easily implemented with standard programming libraries, 3D solutions are still lacking.

In this work, we explore the combination of photogrammetry and LIBS techniques for the creation of a 3D model of the spectral map of the sample. Using a dedicated photogrammetry setup and software, we reconstruct a 3D model of the mineral sample before analyzing it, establishing a process pipeline that results in the creation of a 3D playground to interactively interpret the results. In particular, we make use of Paraview software, which integrates production algorithms and computing performance in a unified solution for scientific purposes.

Our results demonstrate that combining these two techniques can give us a valuable resource for better qualitative analysis, providing a three-dimensional model that can be further analyzed interactively. These findings open the door to a new range of possibilities, from quality control technology involving alloys and mechanical parts to interactive teaching environments for geo and biosciences, just to name a few examples.

Keywords: Laser induced breakdown spectroscopy, Photogrammetry, Minerals

Acknowledgements: This work is financed by the ERDF - European Regional Development Fund through the Norte Portugal Regional Operational Programme - NORTE 2020 under the Portugal 2020 Partnership Agreement, within project CorkSurf, with reference NORTE-01-0247-FEDER-047040 and project CaVaLi with reference POCI-01-0247-FEDER-047728.

References:

[1] Limbeck, Andreas, et al. "Methodology and applications of elemental mapping by laser induced breakdown spectroscopy." *Analytica chimica acta* 1147 (2021): 72-98.

Listening plasmas in Laser Induced Breakdown spectroscopy

**Rafael Cavaco, Pedro Rodrigues, Tomás Lopes, Diana Capela, Miguel Ferreira,
Pedro A. S. Jorge, Nuno A. Silva**

Departamento de Física e Astronomia da Faculdade de Ciências da Universidade do
Porto, Rua do Campo Alegre 687, 4169-007 Porto, Portugal
Center for Applied Photonics, INESC TEC, Rua do Campo Alegre 687, 4169-007
Porto, Portugal

rafael.cavaco@inesctec.pt

Abstract. While the most important source of information in Laser-breakdown induced spectroscopy (LIBS) is the plasma emission itself, the by-products of the process like the emitted sound may also correlate with characteristics of the experiment, opening a window of opportunity for multimodal sensing. In this context, one of the most interesting examples in LIBS is the use of microphones to capture the sound of shock waves. Empirical analysis suggests that the sound captured by a microphone may contain information on the plasma properties such as volume, density, and even temperature, which in the second-order can be related to the sample characteristics such as its composition, humidity, and hardness[1]. Yet the relation between physical parameters and shock wave characteristics can be sometimes complex and hard to deconvolve, thus needing a careful analysis for each case study.

In this work, we report on the possibility of relating plasma properties with the sound from the shock waves in multiple materials, from metals to minerals. First, by analyzing the behavior of shock wave sound from homogeneous reference metallic targets, we investigate the relation between plasma properties and sound signal, demonstrating that distinct materials and plasma characteristics correspond to distinct plasma sound fingerprints. Furthermore, it also demonstrated a correlation between plasma variability and the collected sound. Finally, additional preliminary results demonstrate that sound can be used to identify minerals in geological samples at some extent. In conclusion, the findings presented suggest that microphones are accessible sources of information in LIBS systems, that can be used for rapid diagnosis of plasma and sample properties while paving for other technological applications such as identifying hardware malfunctions in autonomous systems.

Keywords: Laser induced breakdown spectroscopy, Shock waves, Minerals

Acknowledgements: This work is financed by the ERDF - European Regional Development Fund, through the Operational Programme for Competitiveness and Internationalisation - COMPETE 2020 Programme under the Portugal 2020 Partnership Agreement, within project CaVaLi, with reference POCI-01-0247-FEDER-047728.

References:

[1] Kaleris, Konstantinos, et al. "On the correlation of light and sound radiation following laser-induced breakdown in air." *Journal of Physics D: Applied Physics* 53.43 (2020): 435207.

Multimodal approach to mineral identification: merging Laser induced breakdown spectroscopy with hyperspectral imaging

Tomás Lopes^{1,2}, Rafael Cavaco^{1,2}, Pedro Rodrigues^{1,2}, Jorge Ferreira³,
Diana Capela^{1,2}, Miguel Ferreira^{1,2}, Pedro A. S. Jorge^{1,2}, Nuno A. Silva^{1,2}

¹ Departamento de Física e Astronomia da Faculdade de Ciências da Universidade do Porto, Rua do Campo Alegre 687, 4169-007 Porto, Portugal

² Center for Applied Photonics, INESC TEC, Porto, Portugal

³ Laboratório Nacional de Energia e Geologia, I.P. 4466-901 S. Mamede de Infesta

tomas.j.lopes@inesctec.pt

Abstract. The capability to perform localized analysis combined with high rate of acquisition makes Laser Induced Breakdown Spectroscopy (LIBS) one of the most interesting tools for mapping elements in solid and heterogeneous samples. For these reasons, it is rapidly becoming a go-to tool for fast qualitative analysis of the presence and absence of major, minor, and even trace elements, providing interesting insights into a multitude of fields from geology to heritage conservation.

While it is often a standalone technique, LIBS can also work as a tandem solution, combined with other techniques such as UV-VIS-NIR, Raman spectroscopy, or hyperspectral imaging. Concerning the latter, hyperspectral imaging hardware is capturing significant attention for industrial applications and remote sensing by providing novel information from the analysis of the irradiance at invisible regions of the electromagnetic spectrum, allowing it to rapidly discriminate materials in a non-invasive and remote fashion.

In this work, we try to identify possible synergies that arise from merging the analysis from the two techniques and comparing it with the performance of standalone solutions. Having investigated the multimodal approach for a case study involving the identification of lithium minerals, our preliminary results demonstrate that while both solutions can provide reasonable results for qualitative mineral identification, they feature advantages and disadvantages that shall be taken into further consideration. Nevertheless, when working in collaboration, the results enclosed suggest that an integrated tandem solution can be an interesting tool for material analysis for research and industrial applications, combining the best of both instruments.

Keywords: Laser induced breakdown spectroscopy, Hyperspectral imaging, Minerals

Acknowledgements: This work is financed by the ERDF - European Regional Development Fund, through the Operational Programme for Competitiveness and Internationalisation - COMPETE 2020 Programme under the Portugal 2020 Partnership Agreement, within project CaVaLi, with reference POCI-01-0247-FEDER-047728.

References:

- [1] Fabre, Cécile. "Advances in Laser-Induced Breakdown Spectroscopy analysis for geology: A critical review." *Spectrochimica Acta Part B: Atomic Spectroscopy* 166 (2020): 105799.

Drying Patterns of Cerebrospinal Fluid as Indicator for Alzheimer's Disease by a Machine Learning Framework

Laura A. Arévalo^{1*}, Stephen A. O'Brien¹, and Andreas Seifert^{1,2}

¹ CIC nanoGUNE BRTA, Tolosa Hiribidea 76, 20018 San Sebastián, Spain

² IKERBASQUE, Basque Foundation for Science, 43009 Bilbao, Spain

* l.arevalo@nanogune.eu

Abstract. Cerebrospinal fluid (CSF) contains specific biomarkers of Alzheimer's disease (AD) that include amyloid beta peptides and tau proteins. Here we present for the first time possible evidence that the formation of the constituents of CSF during drying is related with AD. We use machine learning to examine optical microscope images of dried CSF patterns from patients with AD and healthy controls to create a diagnostic model. CSF samples were obtained by a lumbar puncture done by clinical doctors. The liquid is filtered by ultracentrifugation (filter Amicon® ultra-0.5) to enrich protein concentration. A 5 μ L drop of each CSF sample was deposited by careful pipetting onto a quartz substrate; samples were dried in air for 20 min; dried samples were analyzed by a Zeiss microscope with a 63x objective. A total of 22 samples from volunteers were studied, of which several were clinically diagnosed with AD. From each patient/sample several images were acquired, such that 166 images were available for image analysis. Fig. 1a shows an example of the patterns formed within a dried drop of CSF with the typical coffee ring effect. The center of the drop (areas 3, 4) contains less proteins, forming thin fern-like patterns, and moving radially away from the center, the macromolecules accumulate in a denser fern-like pattern (area 2). The rim of the drop (area 1) forms a dense ring-shaped film. Although such patterns have been previously observed in drying patterns of protein mixtures, this is the first time relating such features to AD. Fig. 1a (right) highlights typical structural differences between healthy and AD-diagnosed patients. To analyze the images, the histogram of oriented gradients (HOG) is used as a feature descriptor. Each image is mapped into its HOG features space, and principal component analysis (PCA) is applied for dimensionality reduction. Fig. 1b visualizes the separation of healthy and AD groups by the 1st and 2nd principal component (PC). By a quadratic discriminator, AD is predicted with a sensitivity of 82%; the area under the ROC curve (receiver operating characteristics) is 0.75; the figures of merit corroborate the quality of our model, which is still based on low statistics. These promising preliminary results show great potential for new rapid and low-cost diagnostic pathways in the detection of AD.

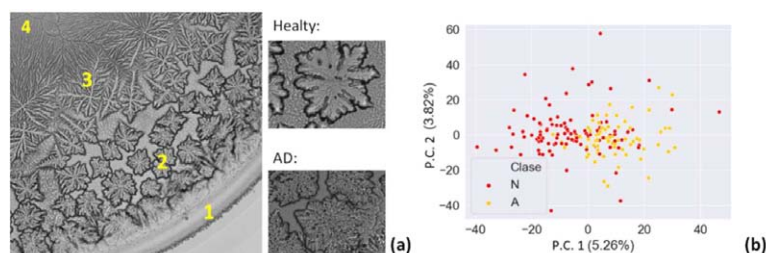


Fig. 1: (a) Microscopy image of dried CSF sample; the small images represent typical patterns from healthy and AD subjects. (b) PCA analysis from images of healthy (N) and AD (A) subjects.

Low-Cost Ultrafine Motion Control System Design for Nano Positioning and Beam Steering

Gaurav Rajput¹; Abhisek Sinha²; Ram Gopal¹; M Krishnamurthy¹

¹Tata Institute of Fundamental Research Hyderabad, India; ²Indian Institute of Technology Hyderabad, India.

grajput@tifrh.res.in

Abstract. The effects of human operation limit the precision of many optical adjustments. In practice, the lateral forces applied to a component during an adjustment often have an excessive effect, making alignments lengthy and inaccurate. Also, many optical experiments are extremely sensitive to environmental factors. Solution for the above problem is highly expensive and is inaccessible to scientific community due to financial implication.

Developed system is highly precise and low cost. System have better than 12-nm resolution with minimal backlash, and can exert a 5-lb (22-N) force. Moreover, they have exceptional long-term stability and the ability to hold their position with no power applied.

Step Controlled motorized Kinematic mirror mount: A motor driven mirror that can be controlled remotely and can be configured through software for varying operational parameters at an accuracy of 1.2 ± 0.2 μ rad.

Auto beam steering/alignment system with QPD feedback: AAS system is based on a control unit that receives signals from detectors (quadrant photo-diode) of beam position and direction, and consequently issues commands for motorized optical elements (e.g., adjustable mirrors/ stage) in order to maintain proper alignment of the beam in millisecond latency.

Above System comprises of DC Micro motor with gear reduction ration of **298:1** with hall effect encoder for accurate positioning is used to precisely control the position with an accuracy of up to **12nm** with **100TPI** screw. **1000x** programmable micro-step resolution for ultra-smooth positioning. Communication is based on **MODBUS protocol** enabling it to control up to 247 actuators using a single point of connection.

Able to attain **8000 steps** in one revolution of motor, which is when coupled with **100TPI** screw giving positional accuracy of **12 nm** approximately and 1.2 ± 0.2 μ rad angular accuracy with a minimal cost, 20times less than other similar equipment.

Keywords: Quadrant Photodiode, Kinematic mount, Actuator, Linear Actuator, Beam Steering, Laser.

Acknowledgements: TATA Institute of Fundamental Research-Hyderabad, India.

Color interferometry using the fractional Fourier transform

**Carlos Jiménez¹, Juan M. Vilardy¹, Eberto Benjumea², Cesar Torres²,
Susana Salinas de Romero³**

¹ Grupo de Investigación en Física del Estado Sólido (GIFES), Faculty of Basic and Applied Sciences, Universidad de La Guajira, Riohacha 440007, Colombia

² Grupo de Óptica e Informática, Physics Department, Universidad Popular del Cesar, Valledupar 200001, Colombia

³ Centro de Investigación en Matemática Aplicada (CIMA), Universidad del Zulia, Maracaibo 4001, Venezuela

cjimenez@uniguajira.edu.co jmvilardy@uniguajira.edu.co

Abstract. We present a mathematical modelling and an experimental work in order to implement a color interferometer using the fractional Fourier Transform (FrFT). The optical setup is based on a Lohmann's first-type system, trifurcated optical fiber and three lasers with wavelengths in the red, green and blue bands of the visible light spectrum. We implement the Young's interference experiment with circular apertures at the input plane of the optical setup and this plane is illuminated with the three lasers and the trifurcated optical fiber. Then, an FrFT is performed by using a Lohmann's first-type optical system and we show that the resulting diffraction pattern depends on the fractional order of the FrFT, the wavelengths of illumination and the separation distance of the circular apertures.

Keywords: Lohmann's first-type optical system, Young's interferogram and fractional Fourier Transform (FrFT).

Real color fractional Fourier transform holograms using fiber optics

Carlos Jiménez¹, Juan M. Vilardy¹, Cesar Torres²

¹Grupo de Investigación en Física del Estado Sólido (GIFES), Faculty of Basic and Applied Sciences, Universidad de La Guajira, Riohacha 440007, Colombia

²Grupo de Óptica e Informática, Physics Department, Universidad Popular del Cesar, Valledupar 200001, Colombia

cjimenez@uniguajira.edu.co jmvilardy@uniguajira.edu.co

Abstract. A new experimental setup to obtain the complex distribution in amplitude and phase of a real color object is proposed and implemented. This holographic configuration is based on the fractional Fourier transform (FrFT) techniques and it uses a trifurcated optical fiber interferometer. Three focused lasers beams with different wavelengths in the red, green and blue bands of the visible light spectrum are passed through the optical system and we obtain two holographic images: one obtained from the reflections on the surface of the object (the hologram) and other from the transmitted reference beam. The holographic images are recorded by a CCD camera and processed using an iterative computer algorithm based on the FrFT. We show that the obtained holographic image quality is better than those generated by traditional methods.

Keywords: Fractional Fourier transform, color holography, optical fiber interferometer.

Towards real-time identification of trapped particles with UMAP-based classifiers

Joana Teixeira, Vicente Rocha, João Oliveira, Pedro A. S. Jorge, Nuno A. Silva

Departamento da Faculdade de Ciências da Universidade do Porto, Rua do Campo Alegre 687, 4169-007 Porto, Portugal
Center for Applied Photonics, INESC TEC, Rua do Campo Alegre 687, 4169-007 Porto, Portugal

joana.m.teixeira@inesctec.pt

Abstract. Optical trapping provides a way to isolate, manipulate, and probe a wide range of microscopic particles. Moreover, as particle dynamics are strongly affected by their shape and composition, optical tweezers can also be used to identify and classify particles, paving the way for multiple applications such as intelligent microfluidic devices for personalized medicine purposes, or integrated sensing for bioengineering.

In this work, we explore the possibility of using properties of the forward scattered radiation of the optical trapping beam to analyze properties of the trapped specimen and deploy an autonomous classification algorithm. For this purpose, we process the signal in the Fourier domain and apply a dimensionality reduction technique using UMAP algorithms, before using the reduced number of features to feed standard machine learning algorithms such as K-nearest neighbors or random forests. Using a stratified 5-fold cross-validation procedure, our results show that the implemented classification strategy allows the identification of particle material with accuracies above 90%, demonstrating the potential of using signal processing techniques to probe properties of optical trapped particles based on the forward scattered light. Furthermore, preliminary results of an autonomous implementation in a standard experimental optical tweezers setup show similar differentiation capabilities for real-time applications, thus opening some opportunities towards technological applications such as intelligent microfluidic devices and solutions for biochemical and biophysical sensing.

Keywords: Optical Tweezers, Optical Trapping, Signal Processing, Machine Learning

Acknowledgements: This work is financed by the ERDF - European Regional Development Fund through the Operational Programme for Competitiveness and Internationalisation - COMPETE 2020 under the Portugal 2020 Partnership Agreement and by National Funds through the FCT - Fundação para a Ciência e a Tecnologia, I.P. (Portuguese Foundation for Science and Technology) within project MYTAG, with reference PTDC/EEI-EEE/4832/2021 and within project UIDB/50014/2020.

References:

- [1] Jorge, Pedro AS, et al. "Classification of optically trapped particles: A comparison between optical fiber tweezers and conventional setups." *Results in Optics* 5 (2021): 100178.
- [2] Carvalho, Inês Alves, et al. "Particle Classification through the Analysis of the Forward Scattered Signal in Optical Tweezers." *Sensors* 21.18 (2021): 6181

Raman based DTS using a 1064 nm pump

Joana Vieira^{1,2*}, Rogério Nogueira¹, A. M. Rocha¹

¹ Institute of Telecommunications, Campus de Santiago, 3810-193 Aveiro, Portugal

² University of Aveiro, Campus Universitário de Santiago, 3810-193 Aveiro, Portugal

joana.saraiva.vieira@av.it.pt

Abstract. Distributed temperature optical fiber sensors (DTSs) are intrinsic optical fiber sensors that can provide temperature measurements continuously along a fiber. Usually, DTSs rely in Raman based optical-time-domain-reflectometry (OTDR) technologies, in which the temperature can be obtained from the ratio between the Stokes (S) and anti-Stokes (AS) bands' powers. The AS band power is more sensitive to temperature than the S band's, in the linear regime, these bands arise from molecular vibrations of silica, providing a 13.2 THz frequency shift relatively to the pump source. The use of already installed singlemode fiber-based telecommunication networks as sensor networks together with data transmission has attracted a great interest recently, as reported in [1], [2]. Such systems can be used for multiple purposes, such as for detecting vehicle speed, road conditions and environment temperature. However, in these trials, data transmission channels were allocated for sensing purposes, decreasing the data transmission capacity. A possible solution to maintain the network capacity is to use a pump wavelength for sensing away from the transmission windows. To evaluate the viability of such systems, we developed a model based on [3], which estimates the Raman S and AS powers. A 1064 nm pump source, with a pulse width of 10 ns, corresponding to a spatial resolution of 1 m, and different peak powers, were considered. For this pump source, the S and AS bands are expected to be centered in the 1115 nm and 1015 nm, respectively. Different fiber lengths and various conditions of temperature for the fiber are evaluated.

Keywords: Distributed Optical Fiber Sensor, Raman backscattering, Optical time domain reflectometry

Acknowledgements: This work is funded by FCT/MCTES through national funds and when applicable co-funded EU funds under the project FireTec and UIDB/50008/2020-UIDP/50008/2020.

References:

- [1] G. A. Wellbrock *et al.*, "First field trial of sensing vehicle speed, density, and road conditions by using fiber carrying high speed data," *Opt. InfoBase Conf. Pap.*, vol. Part F160-, pp. 2019–2021, 2019, doi: 10.1364/ofc.2019.th4c.7.
- [2] G. A. Wellbrock *et al.*, "Field Trial of Distributed Fiber Sensor Network Using Operational Telecom Fiber Cables as Sensing Media," vol. 3, no. 1, pp. 3–5, 2020.
- [3] M. A. Farahani and T. Gogolla, "Spontaneous Raman scattering in optical fibers with modulated probe light for distributed temperature Raman remote sensing," *J. Light. Technol.*, vol. 17, no. 8, pp. 1379–1391, 1999, doi: 10.1109/50.779159.

Robust calibration models for the mining industry: from spectral similarity to multimodal analysis

**Nuno A. Silva, Diana Capela, Miguel Ferreira, Diana Guimarães,
Pedro A. S. Jorge**

Departamento da Faculdade de Ciências da Universidade do Porto, Rua do Campo Alegre 687, 4169-007 Porto, Portugal
Center for Applied Photonics, INESC TEC, Rua do Campo Alegre 687, 4169-007 Porto, Portugal

nuno.a.silva@inesctec.pt

Abstract. Dealing with the chemical matrix of a sample is a complex challenge and one of the biggest hurdles for performing quantitative with laser-induced breakdown spectroscopy. In particular, the problem is of paramount importance for geology applications, where the heterogeneous nature of rocks allied to the multitude of constituent minerals often leads to inconsistent results for technological applications such as ore grading in mining operations.

We explore in this work the use of clustered regression calibration algorithms, that first perform an unsupervised clustering operation in the space of training samples before deploying local linear calibration models for the specific cluster. Furthermore, we investigate three distinct clustering strategies, two of them involving dimensionality reduction techniques (i)PCA and ii) UMAP), and an additional technique involving multimodal data analysis using UV-VIS spectra.

Focusing on a case study of lithium prospection in three distinct exploration drills, the results suggest that deploying local models allows to mitigate the effect of the mineral matrix and improve the performance over a wide range of concentrations. Also, the results generalize well for exploration drills on distinct rock veins in the same exploration area, which suggests that multi-level regression can be an interesting alternative. To finalize, and putting on a broader perspective, the results can inspire the development of algorithms based on this approach that can be reliable in while robust for technological applications.

Keywords: Laser induced breakdown spectroscopy, Lithium mining

Acknowledgements: This work is financed by the ERDF - European Regional Development Fund, through the Operational Programme for Competitiveness and Internationalisation - COMPETE 2020 Programme under the Portugal 2020 Partnership Agreement, within project CaVaLi, with reference POCI-01-0247-FEDER-047728.

References:

- [1] Nuno A. Silva, et al. "Towards robust calibration models for laser-induced breakdown spectroscopy using unsupervised clustered regression techniques" Results in Optics 2022, to appear

Nonlinear encryption for multiple images based on a joint transform correlator and the Gyrator transform

Ronal Perez¹, María Sagrario Millán², Elisabet Pérez-Cabré², Juan M. Vilardy¹,
Cesar O. Torres³

¹ Grupo de Investigación en Física del Estado Sólido (GIFES), Faculty of Basic and Applied Sciences, Universidad de La Guajira, Riohacha 440007, Colombia

² Applied Optics and Image Processing Group, Universitat Politècnica de Catalunya - BarcelonaTech, 08222 Terrassa (Barcelona), Spain

³ Grupo de Óptica e Informática, Physics Department, Universidad Popular del Cesar, Valledupar 200001, Colombia

rperetz@uniguajira.edu.co jmvilardy@uniguajira.edu.co

Abstract. A novel nonlinear encryption system based on a joint transform correlator (JTC) and the Gyrator transform (GT) to encrypt multiple images in grayscale is proposed. The multispectral or color images are considered as a special case taking each color component as a grayscale image. All multiple grayscale images to encrypt are placed in the input plane of the JTC without overlapping. We introduce two random phase mask (RPM) keys for each image to encrypt at the input plane of the JTC-based encryption system. The total number of the RPM keys is given by the double of the total number of the grayscale images to be encrypted. The use of several RPMs as keys improves the security of the encrypted image. The joint Gyrator power distribution (JGPD) is the intensity of the GT of the input plane of the JTC. We obtain only one real-valued encrypted image for all multiple grayscale images to encrypt by introducing nonlinear modifications on the JGPD. The security keys are given by the RPMs and the rotation angle of the GT. The decryption system is implemented by two successive GTs applied to the encrypted image and the security keys given by the RPMs and considering the rotation angle of the GT. Numerical simulations are computed with the purpose of demonstrating the validity and performance of the novel encryption-decryption system.

Keywords: Optical multiple images encryption-decryption system, joint transform correlator (JTC), Gyrator transform, multispectral images, nonlinear image processing.

Double image encryption system using a nonlinear joint transform correlator in the Fourier domain

Ronal Perez¹, María Sagrario Millán², Elisabet Pérez-Cabré², Juan M. Vilardy¹, Cesar O. Torres³

¹ Grupo de Investigación en Física del Estado Sólido (GIFES), Faculty of Basic and Applied Sciences, Universidad de La Guajira, Riohacha 440007, Colombia

² Applied Optics and Image Processing Group, Universitat Politècnica de Catalunya - BarcelonaTech, 08222 Terrassa (Barcelona), Spain

³ Grupo de Óptica e Informática, Physics Department, Universidad Popular del Cesar, Valledupar 200001, Colombia

rperez@uniguajira.edu.co jmvilardy@uniguajira.edu.co

Abstract. In this work, we present a new encryption and decryption system for two images based on a nonlinear joint transform correlator (JTC) in the Fourier domain (FD) along with four random phase masks (RPMs). The two images to be encrypted can be related to each other, but they can also be independent. The encryption system is based on the double random phase encoding (DRPE), which is implemented by using a nonlinear JTC in the FD. The input plane of the JTC has four non-overlapping data distributions placed side-by-side with no blank spaces between them. The four data distributions are phase-only functions defined by the two images to encrypt and four RPMs. The joint power spectrum (JPS) is produced by the intensity of the Fourier transform of the input plane of the JTC. This JPS is modified by two non-linear operations in order to obtain a real-valued encrypted image. The security keys of the encryption system are represented by the four RPMs, which are all necessary for a proper decryption. The decryption system is implemented using a $4f$ -processor along with the encrypted image and the security keys given by the four RPMs. Finally, the feasibility and performance of the proposed double image encryption and decryption system based on a nonlinear JTC is validated through computational simulations.

Keywords: Double image encryption, joint transform correlator (JTC), Fourier domain.

Convolution, correlation and generalized shift operations based on the Fresnel transform

Juan M. Vilarly, Eder Alfaro, Carlos Jimenez

Grupo de Investigación en Física del Estado Sólido (GIFES), Faculty of Basic and Applied Sciences, Universidad de La Guajira, Riohacha 440007, Colombia

jmvilarly@uniguajira.edu.co

Abstract. The Fresnel transform (FrT) is commonly used to describe the free-space propagation of optical waves. In this work, we present new definitions for the convolution, correlation and generalized shift operations based on the FrT. The generalized shift operation is defined by using simultaneous space and phase shifts. The new convolution and correlation operations defined in terms of the FrT can be considered as a generalization of the usual convolution and correlation operations. The sampling theorem for distributions whose resulting FrT has finite support is formulated by using the new convolution operation introduced in this work and a new definition of the Dirac comb function. These new definitions and results could be applied to describe, design and implement optical processing systems related to the FrT. Finally, we present some centred optical systems used in holographic and optical information processing systems that can be described or modelled by the new definitions of the operations proposed in this paper.

Keywords: Fresnel transform, shift operation, convolution, correlation, optical systems.

Electricity generation from solar irradiation using the Seebeck effect

Johonfri Mendoza¹, Eder Alfaro¹, Juan Vilardy¹, Marlon Bastidas²,
Carlos Jimenez¹

¹Grupo de Investigación en Física del Estado Sólido (GIFES), Faculty of Basic and Applied Sciences, Universidad de La Guajira, Riohacha 440007, Colombia

²Grupo de Desarrollo de Estudios y Tecnologías Ambientales del Carbono (DESTACAR), Faculty of Engineering, Universidad de La Guajira, Riohacha 440007, Colombia

jmendozac@uniguajira.edu.co jmvilardy@uniguajira.edu.co

Abstract. Different mechanisms have been developed to generate electricity from solar irradiation, such as photovoltaic cells and optical reflection or transmission concentrators that focus solar irradiation into a thermal working fluid. The Stirling dish is an optical reflection concentrator of solar irradiation that heats a thermal fluid contained in a receiver represented by a Stirling engine. In this work, we present a design of technological adaptation for the Stirling dish in order to focus the thermal energy coming from the sun by reflection in several pairs of two twisted wires composed by different materials and connected serially. The proposed technological adaptation consists of replacing the receiver of the Stirling dish system by a serial array of two different twisted conductive materials (wires) with the purpose of producing the phenomenon known as the Seebeck effect to generate electricity from the thermal energy obtained by using the solar irradiation. The selected conductive materials correspond to those with the higher electrical potential difference reported in the literature.

Keywords: Stirling dish, energy conversion, Seebeck effect, thermosolar energy.

Multiplexed holographic lenses applied to solar concentrators and passive solar trackers

Eder Alfaro¹, Juan Vilardy¹, Marlon Bastidas², Johonfri Mendoza¹,
Carlos Jimenez¹

¹Grupo de Investigación en Física del Estado Sólido (GIFES), Faculty of Basic and Applied Sciences, Universidad de La Guajira, Riohacha 440007, Colombia

²Grupo de Desarrollo de Estudios y Tecnologías Ambientales del Carbono (DESTACAR), Faculty of Engineering, Universidad de La Guajira, Riohacha 440007, Colombia

ealfaro@uniguajira.edu.co, jmvilardy@uniguajira.edu.co

Abstract. Nowadays, there are different technologies for the conversion of thermosolar energy with multiple purposes, such as: parabolic trough collector, concentrating solar power plant, Stirling dish collector and linear Fresnel systems. These solar collector systems have some drawbacks, as they need a tracking system to follow the relative position of the sun and their mechanical support structures need to be continually maintained, which results in increased costs for the transformation of the solar energy. In this work, we propose to use volume holography as an alternative application in thermosolar concentrator technology. In order to overcome the mentioned drawbacks of the traditional thermosolar concentrators, several multiplexed holographic lenses can be recorded in a volume holographic optical element. These multiplexed holographic lenses behave like a fixed solar tracker of the light coming from the sun in different relative positions at different times of the day. Therefore, the sunlight is always focused on the same point, where a receiver is located for the transformation of this solar energy. Finally, we present numerical simulations of the design of multiplexed holographic lenses using a volume holographic optical element, with their respective performance for solar energy concentration.

Keywords: Holographic thermosolar concentrator, thermosolar concentrating technology, volume holographic.

GUI-Based Phase Retrieval Algorithm for the Reconstruction of the Longitudinal Component of Electromagnetic Beams

Marcos Aviñoá^{1,*}, David Maluenda¹, Kavan Ahmadi¹, Rosario Martínez-Herrero²
and Artur Carnicer¹

¹ Universitat de Barcelona (UB), Departament de Física Aplicada, Martí i Franquès 1,
08028 Barcelona, Spain

² Departamento de Óptica, Facultad de Ciencias Físicas, Universidad Complutense de
Madrid, Ciudad Universitaria, 28040 Madrid, Spain

* mperezavinoá@ub.edu

Abstract. In this work we present a guided user interface (GUI) that facilitates the reconstruction of the longitudinal component of a highly focused electromagnetic beam, as has already been shown in a recent publication [1]. The GUI is based on a phase retrieval algorithm [2, 3], which instead of trying to resolve the energy content of the longitudinal component near the focal plane of a highly focusing optical system, it reconstructs the phase of the transversal components probed through a magnifying optical system. To complement the reconstruction and avoid possible local minima, we have included an acceleration parameter on the algorithm [4]. The GUI guides the user input all the key parameters needed for the reconstruction, such as the pixel size, the magnification of the probing system and the number of iterations. Moreover, the GUI also visually represents the effect of some of the parameters on the recorded field. Amongst others, the Fourier Transform of the irradiance, which helps determine the size of the Entrance Pupil of the focusing optical system, and the local phase difference between x and y components. Once the phase is retrieved, the user can check the validity of the reconstruction through an included propagation and visualization algorithm. Finally, the user can save the retrieved phases and the configuration used to retrieve them through a drop-down menu or a combination of keys.

Keywords: Focal fields, Fourier Optics, Polarization, Phase Retrieval

Acknowledgements: Projects PID2019-104268GB-C21 and PID2019-104268GB-C22 funded by Ministerio de Ciencia e Innovación, MCIN /AEI/10.13039/501100011033

References:

- [1] D. Maluenda, M. Aviñoá, K. Ahmadi, R. Martínez-Herrero, and A. Carnicer, "Experimental estimation of the longitudinal component of a highly focused electromagnetic field." *Sci Rep*11(2021).
- [2] J. R. Fienup, "Reconstruction of an object from the modulus of its fourier transform," *Opt. Lett.*3, 27–29 (1978).
- [3] J. R. Fienup, "Phase retrieval algorithms: a comparison," *Appl. Opt.*21, 2758–2769 (1982).
- [4] D. S. C. Biggs and M. Andrews, "Acceleration of iterative image restoration algorithms," *Appl. Opt.*36, 1766–1775(1997).

Percentage estimate of the coffee seeds germination using processing of dynamic speckle images

Lenin Nuñez¹, Eberto Benjumea^{1,2}, Juan Vildady¹, Fabio Vega¹, Cesar Torres¹

¹Grupo de Óptica e Informática, Universidad Popular del Cesar, Valledupar, Colombia

²Facultad de Ingeniería. Universidad Tecnológica de Bolívar, Cartagena, Colombia

leninnunez@unicesar.edu.co vilardy.juan@unicesar.edu.co

Abstract. Determination of germination capacity is a major concern for coffee growers. The slow seed germination and the use of traditional methods of estimation (sowing samples of a population) lead to the investment of long-time intervals, generally one to two months. In addition, transport and storage conditions, and the high sensitivity of seeds to humidity and temperature affect their germination capacity. In the present work, the analysis of the time evolution of the speckle diagram of coffee beans is performed in order to establish the presence of live embryos in seeds in short time intervals (minutes). The implemented system consists of a cell phone CMOS camera for the acquisition and transmission of the 720x480 images, a computer for the management, reception and processing of the images, a wireless local area network, a He-Ne 633 nm laser with 10 mW optical power as coherent light source, an optical diffuser and an aluminium surface for the placement of the seeds. The study shows satisfactory results in determining how many and which seeds germinate out from a given total. The use of the proposed system reduces the time to estimate the germination percentage from months to minutes. In addition, this research opens the door to future projects for the classification of coffee seeds by mechanical systems, and to projects for the prediction of crop productivity.

Keywords: Speckle, image processing, coffee seeds germination.

Optical generation of surface plasmons in graphene with femtosecond laser pulses

Rui Dias, Manuel Rodrigues, José Carlos Viana Gomes, Michael Besley,
Mikhail Vasilevskiy

Centro de Física das Universidades do Minho e do Porto (CF-UM-UP),
Universidade do Minho, Braga 4710-057, Portugal

rui.dias1999@gmail.com, mrodrigues@fisica.uminho.pt, zgomes@fisica.uminho.pt,
belsley@fisica.uminho.pt, mikhail@fisica.uminho.pt

Abstract: Although surface plasmons (SPs) in graphene are coupled intrinsically to p -polarised electromagnetic waves and form surface plasmon-polaritons [1], their generation entirely by optical means is difficult because of the large wavevector and small frequency (in the THz range) characteristic of these excitations. One of the ways to bypass this difficulty is to use two optical beams with a sufficiently small frequency difference and use a geometry where their wavevector sum up via an interaction mediated by graphene electrons.

We are aware of very few previous experimental works [2, 3] that succeed in an all-optical generation of SPs by exploiting graphene's nonlinear response with two optical beams. This nonlinear response is believed to be caused by a quadratic light-matter interaction, described by a second-order conductivity. This function was calculated in several works [4, 5]. However, these predictions do not agree between them and strongly deviate from the experimental data of Ref. [2], where the 2nd order conductivity was estimated by measuring the differential reflectivity of the beam probe. In this work we present a new calculation of the second order conductivity that, in spite of giving a better description of the experimental results, it also fails to explain it correctly. Also, we use our conductivity to calculate the differential reflectivity in [2] and compare with the previous experimental results and possibly with those of our experiments, currently in progress.

Keywords: graphene, surface plasmons, pulsed optical pump, femtosecond laser

Acknowledgements: Support from the Portuguese Foundation for Science and Technology (FCT) through the project Ref. 017/ECUM/CFUM/2021 – ODe2D and the Strategic Financing UID/FIS/04650/2020 is acknowledged.

References:

- [1] Yu. V. Bludov et al., International Journal of Modern Physics B, 27, 1341001 (2013)
- [2] T. J. Constant, S. M. Hornett, D. E. Chang, and E. Hendry, Nature Physics, 12, 124–127 (2016).
- [3] Baicheng Yao et al, Nature Photonics, 12, 22–28 2018.
- [4] T. J. Constant et al., Scientific Reports, 9, 3267 2019.
- [5] Xianghan Yao, M. Tokman, and A. Belyanin, Phys. Rev. Lett., 112, 055501 (2014).

Au-ZnO thin films: Influence of gold concentration and annealing on the microstructure and plasmonic response

Patrícia Pereira-Silva ^{a,b}, Joel Borges ^b, Marco S. Rodrigues ^b, Paula Sampaio ^a
Albano Cavaleiro ^{c,d}, Filipe Vaz ^b

^a Centre of Molecular and Environmental Biology (CBMA), Department of Biology, University of Minho, 4710-057 Braga, Portugal

^b Physics Center of Minho and Porto Universities (CF-UM-UP), University of Minho, Campus de Azurém, 4800-058 Guimarães, Portugal

^c Centre for Mechanical Engineering, Materials and Processes (CEMMPRE), University of Coimbra, Rua Ricardo Reis, 3030-788 Coimbra, Portugal

^d Instituto Pedro Nunes (IPN), Laboratório de Ensaaios, Desgaste e Materiais, Rua Pedro Nunes, 3030-199 Coimbra, Portugal

patricialexandra11@gmail.com

Abstract. Nanoplasmonic thin films, composed of Au nanoparticles dispersed in a ZnO matrix were produced for Localized Surface Plasmon Resonance (LSPR) applications. The thin films were deposited by reactive magnetron sputtering, with different gold concentrations, followed by post-deposition annealing to promote the nanoparticles' morphological evolution, crucial for LSPR bands. Four sets of thin films were prepared, containing Au atomic concentrations of 0, 9.3, 12.4 and 18.4 at.%. The Au nanoparticles were formed in a nearly stoichiometric and polycrystalline ZnO matrix, and observed in different stages of their growth (size and shape) depending on the annealing temperature. As both annealing temperature and gold concentration were raised, large and irregular nanoparticles were formed, due to coalescence processes. Well-defined LSPR bands appeared in the films with Au concentrations of 9.3 and 12.4 at.%, but only at higher annealing temperatures (400 and 600 °C), with resonance peaks in the range from 570 nm to 615 nm. The increase of the annealing temperature also improved the LSPR properties of the Au-ZnO thin films, namely a two-fold increment of the refractive index sensitivity, showing promising responses to be tested in plasmonic applications.

Keywords: Thin films; Magnetron sputtering; Au nanoparticles; ZnO matrix; Localized Surface Plasmon Resonance

Acknowledgements: This work was supported by the Portuguese Foundation for Science and Technology (FCT) in the framework of the Strategic Funding UID/FIS/04650/2019 and UID/EMS/00285/2019; and by the project NANO4BIO: POCI-01-0145-FEDER-032299, with FCT reference PTDC/FIS-MAC/32299/2017. Patrícia Pereira-Silva acknowledges FCT for her Ph.D. scholarship 2020.08235.BD.

References:

- [1] Pereira-Silva, P. et al. Nanocomposite Au-ZnO thin films: Influence of gold concentration and thermal annealing on the microstructure and plasmonic response. *Surface and Coatings Technology* 385, 125379 (2020).

Diffractive optical element fabrication at chalcogenide thin film surface

Vadims Kolbjonoks, Andrejs Bulanovs, Vladimirs Kostjukičs

Daugavpils University, Latvia

vadims.kolbjonoks@du.lv

Abstract. Focused electron beam used to interact with chalcogenide thin film substrate. Result of interaction presented as controlled relief formation on substrate surface after etching in alkaline amine solution. By managing focused electron beam parameters, diffractive optical elements and hidden image effect by means of digital hologram have been recorded. As the result reflected laser beam of the thin film substrate, in the near field, represents hidden image that been recorded along the hologram at the background. The possibilities of practical usage of this substrate as the material for the production of holograms and diffractive optical elements discussed in this study.

Keywords: diffractive optical elements, thin films, focused electron beam

Hand grip strength using an FP sensor embedded in 3D printed cantilever

Susana Novais^{1*}, António Vaz¹, António Martins², Cristina Caridade²,
Susana Silva¹, Orlando Frazão¹

¹ INESC TEC—Institute for Systems and Computer Engineering, Technology and Science, Rua do Campo Alegre 687, 4169-007 Porto, Portugal

² Institute of Engineering, Polytechnic of Coimbra, Coimbra, Portugal

* susana.novais@inesctec.pt

Abstract. A 3D printed cantilever with two embedded fibre Fabry-Perot sensors is proposed for hand grip strength measurement. The FP sensors rely on a hollow core fibre (270 μm in length, 75 μm of inner diameter) spliced between two single mode fibres thus requiring only the use of a commercial fusion splicer for the fabrication of the sensors. The cantilever structure was printed in ABS polymer, which, due to its resistance to bending, makes it ideal for this type of tests. The sensing structure was tested in 22 healthy right-handed and 22 left-handed adults to measure the hand grip strength by means of an anti-stress ball. In an initial phase of the work, the calibration of the sensors was carried out. The lateral load measurements were performed by placing the FP sensors embedded in the 3D printed cantilever in a flat platform, so that the stress was applied evenly throughout the structure. Cylindrical weights of ~ 250 g were sequentially positioned on top of the structure, translating into a lateral load ranging from 0.0 N to ~ 13.0 N. All the experiments were performed several times and by considering both the increase and decrease of lateral load. The FP sensors were characterized and sensitivities of 0.076 ± 0.003 nm/N and -0.057 ± 0.005 nm/N were attained. There was good reproducibility of the results, evidencing the reversibility of the structure. The resolution of ~ 0.0179 N was estimated considering the reading resolution of 1pm. The final objective of this study was to demonstrate the feasibility of FP interferometry in measuring hand-grip strength, and by comparison with studies published in the literature, that the dominant hand of right-handed/left-handed individuals has more strength [1].

Keywords: Optical Fibre sensor; Fabry-Perot interferometer; Anti-Stress ball; Strength; Dominant hand.

Acknowledgements: This work is financed by National Funds through the Portuguese funding agency, FCT-Fundação para a Ciência e a Tecnologia, within 2020.00044.CEECIND research contract.

References:

- [1] Wichelhaus *et al.*, Parameters influencing hand grip strength measured with the manugraphy system, BMC Musculoskeletal Disorders (2018) 19:54.

White light interferometer for Fabry-Perot cavities sensors with absolute physical measurement

João Reis^{1,3*}, António V. Rodrigues^{1,2}, Paulo Robalinho^{1,2}, Susana Novais¹,
João Maia¹, Paulo Marques^{1,3}, D. Roma^{4,5}, J. Salvans^{4,5}, M. Canal^{4,5}, J. Ramos^{4,5},
V. Gualani^{4,5}, S. Sisteré^{4,5}, V. Martín^{4,5}, M. Nofrarias^{4,5}, Susana Silva¹,
Orlando Frazão¹

¹ INESC TEC, Rua do Campo Alegre s/n, 4169-007 Porto, Portugal

² Faculdade de Engenharia da Universidade do Porto, Rua Dr. Roberto Frias, s/n,
4200-465 Porto, Portugal

³ Faculdade de Ciências da Universidade do Porto, Rua do Campo Alegre s/n, 4169-
007 Porto, Portugal

⁴ Institut de Ciències de l'Espai (ICE, CSIC), Campus UAB, Carrer de Can Magrans
s/n, 08193 Cerdanyola del Vallès, Spain

⁵ Institut d'Estudis Espacials de Catalunya (IEEC), Gran Capità, 2-4, Ed. Nexus,
08034 Barcelona, Spain

joao.m.goncalves@inesctec.pt

Abstract. In this work an optical fiber interrogation system based on white light interferometry for Fabry-Perot (FP) cavities was developed. The system consists of two FP cavities in series. One FP interferometer, with nominal length of 191 μm , was interrogated by a Fabry Perot cavity with nominal length of 200 μm . The interrogation system was modulated with the aid of a PZT driven by a triangular signal at 5 Hz and varying amplitude, generated by a commercial signal generator. The output signal was collected, for each amplitude, by a photodetector and displayed on an oscilloscope. The signal displayed on the oscilloscope has the shape of a sinc. When the two cavities are balanced, i.e, there is no optical path difference between them, a maximum of the sinc is observed. The advantage of this system is that it can be used to estimate physical parameters (temperature, strain) with higher resolution than commercial optical interrogators.

Keywords: Fabry Perot Cavities, White Light Interferometry, Optical Interrogators

Acknowledgements: This work was realized with the financial support of the Lira Project in accordance with the terms of ESA Contract No. 4000135481/21/NL/AR.

Fabry-Perot cavity based on silica tube with steel for Physical parameters measurements

**Cristina Cunha¹, António Rodrigues¹, Susana Novais¹, Susana Silva¹,
Orlando Frazão¹**

¹ INESC TEC, Rua do Campo Alegre 687, Porto 4169-007, Portugal

up201805217@fc.up.pt

Abstract. In this work, a Fabry-Perot cavity (FP) based on silica tube fused between two single mode fibres for physical parameters measurements is proposed. The FP cavity consisted of a 400 μm -length silica-cavity inserted into a stainless-steel tube with ~ 60 mm in length. The FP cavity was characterized in temperature and strain. The temperature was measured within a range of $[25, 80]$ °C to which the FP sensor response presented a low sensitive of 1.3 pm/K. Furthermore, for strain measurements it revealed a sensitivity of (30.11 ± 0.31) pm/ $\mu\epsilon$. This type of FP cavity inserted into a stainless-steel tube was compared with a conventional all-fibre FP cavity with a strain sensitivity of (31.24 ± 0.10) pm/ $\mu\epsilon$ and presenting also a very low temperature sensitivity. Finally, this sensing head design presents robustness and compact size when compared with the all-fibre FP configuration. By combining these two distinct FP configurations, one enables a strain-temperature discrimination sensor. The proposed FP sensor using stainless-steel can be useful for engineering applications where the environment requires robust sensors.

Keywords: Fabry-Perot cavity, interferometer, optical fiber

Acknowledgements: This work is financed by National Funds through the Portuguese funding agency, FCT-Fundação para a Ciência e a Tecnologia, within 2020.00044. CEECIND research contract.

References:

- [1] Liu, Q, Peng, W. Fast interrogation of dynamic low-finesse Fabry-Perot interferometers: A review. *Microw Opt Technol Lett.* 2021; 63: 2279– 2291. <https://doi.org/10.1002/mop.32922>

Simulation and development of a prototype for high precision surface metrology

Sílvia Costa, Manuel Abreu

Campo Grande 16 edifício C8

fc51745@alunos.fc.ul.pt

Abstract. Optical techniques are used in many applications in the metrology field, namely for high accuracy surface profiling. Although there are many techniques available, a specific measurement methodology must be correctly chosen according to the specifications of the range of measurement, field and surface characteristics. In this work we simulate and develop a small prototype capable of measuring surfaces of circa 10 by 10 cm with an uncertainty of 20 μm in all directions, using the astigmatic method as baseline. The aim of this paper is then to show a dedicated and optimized optical setup that allow the surface characterization of a sample surface.

Keywords: astigmatic method, surface profiling, topology

Acknowledgements: The authors would like to thank to the Instituto de Astrofísica e Ciências do Espaço (IA) and to the Physics Department of Faculdade de Ciências da Universidade de Lisboa.

Development of plasmonic thin films for new biodetection approaches

Diana I. Meira^a, Patrícia Pereira-Silva^{a,b}, Joel Borges^a, Filipe Vaz^a

^a Physics Center of Minho and Porto Universities (CF-UM-UP), University of Minho, Campus de Azurém, 4800-058 Guimarães, Portugal.

^b Centre of Molecular and Environmental Biology (CBMA), Department of Biology, University of Minho, 4710-057 Braga, Portugal.

joelborges@fisica.uminho.pt

Abstract. Optical biosensors based on Localized Surface Plasmon Resonance (LSPR) are the future of biosensing detection methods. Plasmonic thin films, composed of noble nanoparticles dispersed in a dielectric matrix, exhibit peculiar optical properties based on the LSPR phenomenon, proving to be an outstanding tool in biodetection. The LSPR effect is based on the excitation of localized surface plasmons on the metallic nanoparticle's surface. Therefore, the main goal was to develop a sensitive and robust optical platform based on nanoplasmonic thin films composed of gold nanoparticles (Au) embedded in different dielectric matrices for biosensing application. After the plasmonic thin film deposition, through reactive DC magnetron sputtering and post-deposition treatments, a biorecognition layer was immobilized on the surface of Au-TiO₂ thin films providing target analyte specificity. Streptavidin and biotin-conjugated with horseradish peroxidase (HRP) were the receptor-analyte model chosen to prove the immobilization efficiency and to demonstrate the LSPR-based sensor potential. Firstly, streptavidin, the biorecognition layer, was immobilized, and the interaction between the aimed target, biotin-HRP, was confirmed by an LSPR wavelength shift. However, due to the low sensitivity of the plasmonic thin film, the LSPR response was not as expected. The sensing platform can be improved by increasing the Au-TiO₂ thin film sensitivity and functionalizing with an adhesion layer. The functionalization can promote an optimal orientation of the biorecognition elements, increasing the available biorecognition area and, thus, increasing the biointeraction efficiency. Therefore, thiol crosslinker (DSP) functionalization was performed and successfully confirmed by an LSPR wavelength shift and AFM data. The immobilization of the biorecognition layer into the functionalized Au-TiO₂ thin films will be considered the following step in biosensor development. The main advantage of an LSPR-based sensor consists in the versatility of sensing ability since the main base of knowledge can be applied to other targets.

Keywords: LSPR sensing; Plasmonic Thin Film; Optical Biosensors; Nanotechnology

Acknowledgements: This research was sponsored by the Portuguese Foundation for Science and Technology (FCT) in the framework of Strategic Funding UIDB/04650/2020. D.I. Meira and P. P-Silva acknowledge FCT for PhD scholarships: SFRH/BD/143262/2019, 2020.08235.BD, respectively.

References:

- [1] P. Pereira-Silva, D.I. Meira, et al., Immobilization of Streptavidin on a Plasmonic Au-TiO₂ Thin Film towards an LSPR Biosensing Platform, *Nanomaterials*. 12 (2022) 1526

Ionisation of camphor molecule doped in helium nanodroplets by EUV and soft X-ray photons

Sanket Sen¹, S. De², S. Mandal³, R. Gopal⁴, L. Ben Ltaief⁵, S. Turchini⁶,
D. Catone⁶, N. Zema⁶, M. Coreno^{7,8}, R. Richter⁷, M. Mudrich^{2,5}, S.R. Krishnan²
and V. Sharma¹

¹ Indian Institute of Technology Hyderabad, Kandi 502285, India.

² QuCenDiEM - group and Department of Physics, Indian Institute of Technology - Madras, Chennai 600036, India.

³ Indian Institute of Science Education and Research, Pune 411008, India.

⁴ Tata Institute of Fundamental Research, Hyderabad 500046, India.

⁵ Aarhus University, 8000 Aarhus C, Denmark.

⁶ Istituto di Struttura della Materia - CNR (ISM-CNR), Area di Ricerca di Tor Vergata via del Fosso del Cavaliere, 100, Rome 00133, Italy.

⁷ Elettra-Sincrotrone Trieste, Basovizza 34149, Italy.

⁸ Consiglio Nazionale delle Ricerche - Istituto di Struttura della Materia, Trieste 34149, Italy.

vsharma@phy.iith.ac.in

Abstract. Helium nanodroplets are widely considered as an ideal cold, weakly interacting host matrix for spectroscopic investigation of dopant species. However, intriguing relaxation processes occur between the dopant and the host He nanodroplet [1,2]. In this work, we present ionisation of camphor molecules doped He nanodroplet ionised by extreme UV (19 -26 eV) and soft X-ray (near C 1s edge of camphor molecule) synchrotron radiation. We employed velocity map imaging with photoelectron photoion coincidence (VMI-PEPICO) [1] to image electrons/ions generated from an ionisation event. Photoelectron energy spectra (PES) and mass spectra with 19 eV photon suggest cooling of molecular ion post ionisation. Penning transfer of excitation to dopant molecule is observed at 21.6 eV in presence of He nanodroplet. The Penning PES reveals a notable scattering of electrons in the droplets as reported earlier [2,3]. Indirect ionisation of the camphor molecule is unambiguously observed at 26 eV. A noticeable decrease in the energy of droplet correlated ionic fragments as compared to the fragments from effusive camphor molecule is observed, as seen previously [4,5]. A similar decrease of fragment kinetic energy is observed at C 1s edge.

Keywords: Camphor molecule, Doped He nanodroplet, Photoelectron spectra, Ion energy spectra

References:

- [1] D. Buchta, S. R. Krishnan et al. 2013 *J. Phys. Chem. A*, **117**, 4394.
- [2] S. Mandal, R. Gopal et al. 2020 *Phys. Chem. Chem. Phys.*, **22**, 10149.
- [3] Ltaief L Ben. et al. 2021 *J Low Temp Phys.*, **202**, 444.
- [4] A. Braun and M. Drabbles. 2007 *J. Chem. Phys.*, **127**, 114303.
- [5] Darcy S. Peterka et al. 2006 *J. Phys. Chem. B*, **110**, 19945.

Effect of bandwidth on Two Plasmon decay instability

Sonali Khanna¹, Ratul Sabui¹, Angana Mondal², Gaurav Rajput¹, Ram Gopal¹,
M. Krishnamurthy^{1,2*}.

¹ Tata Institute of Fundamental Research, Hyderabad, Telangana, India.

² Tata Institute of Fundamental Research, Mumbai, Maharashtra, India

* mkrism@tifr.res.in

Abstract. Laser plasma interaction is one stop source of high energy electrons, ions, electromagnetic radiation ranging from THz to X-rays. Such bright particle beam and small source size has potential applications in wide range of contexts, from medical physics to defence and many other industries. To make the source viable for many applications production of high energy electrons with high repetition rate of laser is necessary. The recent developments from our group have shown that structural modification of target enhances two plasmon decay instability and boosts electron acceleration to MeV energies even at intensity of 10^{16} W/cm². In this work, we present the effect of bandwidth on the emission of electrons studied by manipulating the chirp of the laser pulse for its potential use with MHz lasers which have a shorter bandwidth.

References:

- [1] Felicie Albert and Alec Thomas. Applications of laser wakefield accelerator-based light sources. *Plasma Physics and Controlled Fusion*, 58, 09 2016.
- [2] Angana Mondal, et al., Laser structures micro-targets generate MeV electron temperature at $4 * 10^{16}$ W/cm². arViv:2107.033866.

Electron spectrum and angular distribution from aerosol jet collimated by an aerodynamic lens

Ravishankar Sugumar^{1,2}, Haritha Venugopal¹, Ram Gopal², M. Krishnamurthy²,
S. R. Krishnan³, Vandana Sharma¹

¹ Indian Institute of Technology Hyderabad, Kandi, India

² Tata Institute of Fundamental Research Hyderabad, Hyderabad, India

³ Indian Institute of Technology Madras, Chennai, India

vsharma@phy.iith.ac.in

Abstract. Electrons at relativistic temperatures are typically generated with laser intensity of 10^{18} W/cm². However, electrons of temperature at 200 keV and 1 MeV and photons of energies up to 6 MeV have been observed at non-relativistic intensities ($\sim 10^{16}$ W/cm²) for single micro-droplet target of size 15 μ m [1] and from boric acid solid particles of size ranging from 100 nm to 1 μ m [2]. To bridge the gap in understanding of the physics in 1 μ m – 10 μ m particle size interaction with the laser, an aerosol generator was considered as the particle source and an aerodynamic lens to collimate the aerosol jet to increase the particle intensity. Simulation of aerodynamic lens was carried out on SimScale and the lens was fabricated according to the design. The size and velocity distribution of the jet were calculated by analysing the images of the droplets imaged with nanosecond laser pulses. In this work, we present the data from the aerosol size distribution, the electron spectrum and angular distribution obtained from the aerosol interaction with a femtosecond laser at an intensity of $\sim 10^{16}$ W/cm².

Keywords: Aerodynamic lens, high energy electrons, laser-matter interaction, particle imaging with laser, Simscale simulation.

References:

[1] A. Mondal, arXiv preprint, arXiv:2107.03866 (2021).

[2] R.K. Yembadi, PhD thesis (2021)

Relativistic electron acceleration at non-relativistic intensities using sub-lambda targets

Ratul Sabui^{1,2}, Rakesh Kumar Y², Vandana Sharma², M. Krishnamurthy¹

¹Tata Institute of Fundamental Research, Hyderabad, India.

²Indian Institute of Technology, Hyderabad, India.

mkrism@gmail.com, ratulsabui@gmail.com

Abstract: Intense laser plasma interactions have traditionally been seen as a source of accelerated charged particles and radiation and involves a transfer of energy from a laser pulse to particles. This transfer of energy from EM wave to the plasma and subsequently to individual particles have been attributed to various mechanisms and their scaling laws are well documented. At intensities of 10^{16} W/cm², one can ideally expect electron temperatures of 50keV. Recent studies conducted at our lab have shown that at similar intensities, with certain structural modifications of the target, one can get a temperature enhancement of 20 times, with maximum electron energies reaching up to 6MeV. The structural modification is brought about by carefully designing the low intensity pre-pulse that precedes the main pulse. The emissions were studied both experimentally and through simulations to reveal the exact mechanism leading to this enhancement. Parametric Instabilities triggered by the modifications were ascertained to be the chief cause of this energy enhancement. The emitted electrons had a very distinct directionality and was released in bright ultrashort bunches, thus making this technique a promising contender for various applications – both scientific and commercial. The emission ranges that were only possible with low repetition rate multi-terawatt laser systems could now be realized using a high rep-rate sub-terawatt university class laser. The above experiments were conducted using particles that were several multiples of the laser input wavelength in size, thus ensuring the occurrence of the concerned structural modification. The change in the density profile was largely expected to have a stringent dependence on the initial target structure, but experiments have proved the contrary. In later studies it was observed that even with smaller targets (some of them smaller than the wavelength of light) similar temperature enhancements could be seen in the electron emission spectra, thus offering an incentive for further exploration of such systems.

Keywords: laser plasma interaction, two plasmon decay, ultrafast intense laser, nano-particles, relativistic electron.

References:

- [1] N. A. Ebrahim, H. A. Baldis, C. Joshi, and R. Benesch, “Hot electron generation by the two-plasmon decay instability in the laser-plasma interaction at 10.6 μ m,” Phys. Rev. Lett. 45, 1179–1182 (1980)

Peripheral optics in the eye: from myopia to cataracts

Pablo Artal

Universidad de Murcia, Lab. Optica, Campus de Espinardo (Ed 34), Murcia, Spain

pablo@um.es

Abstract. The optical quality of the images formed by the eye in the retina imposes a physical limit to our vision. For decades, the eye's optics has been mainly studied on axis, typically at the fovea where the eye has its maximum spatial resolution. However, beyond the fovea, the quality of the eye in the periphery of the retina presents special characteristics. In the last years, there has been a renewed interest in this area fueled by two important applications. On the one hand, it was suggested that optical errors in the periphery could trigger the development of myopia in children. On the other hand, it was discovered that the crystalline lens have a protective effect for the peripheral optics that was missed after cataract surgery when intraocular lenses were implanted. In this talk, I will revise the state of the art of this area with special emphasis in the results of my lab including the design and clinical result of a new intraocular lens to improve peripheral optics in pseudophakic patients.

Some recent advances in color science

Manuel Melgosa

Department of Optics. University of Granada. 18071 – Granada (Spain)

mmelgosa@ugr.es

Abstract. We will discuss some of main topics in two recent publications on color from the International Commission on Illumination (CIE): CIE 015:2018 [1] and CIE 248:2022 [2]. Regarding CIE 015:2018, it is the 4th edition of most important CIE general publication on color science, generally known as ‘CIE 15’ publication. Among main novelties of CIE 015:2018 with respect to its previous edition, dated 2004, we can mention the introduction of the next four topics: 1) cone-fundamental-based colorimetric observers; 2) new CIE illuminants (indoor daylight illuminants, smoothed daylight illuminants, illuminant E, LED illuminants); 3) CIE colour appearance model CIECAM02; 4) CIE 2017 color fidelity index. As a consequence of the active research on color appearance during the past few years, CIE 248:2018 proposed the CIECAM16 color appearance model for related colors and CIE 1931 standard colorimetric observer. In general, color appearance models provide a viewing-condition-specific method for the transformation of the tristimulus values X , Y , Z , to or from perceptual attribute correlates. CIECAM16 replaces CIECAM02 and may be useful for color management systems or used in the imaging industries. CIECAM16 is simpler and maintains the CIECAM02 predictions of experimental visual data. Finally, we will discuss advances on two issues related to color within the currently proposed CIE Research Strategy [3]: 1) A roadmap toward a new CIE colorimetry based on cone fundamentals, currently studied by CIE Technical Committee 1-98; 2) Color differences in tri-dimensional object colors and spatio-chromatic complexity, currently studied by CIE Technical Committees 8-17 and 8-14, respectively. In overall, we can conclude stating that color science is an active inter- and multi-disciplinary research field where optics continues playing a key role.

Keywords: colorimetry, color appearance, color difference, color rendering, cone fundamental.

Acknowledgements: Ministry of Science and Innovation, National Government of Spain, PID2019-107816GB-I00/SRA/10.13039/501100011033.

References:

- [1] CIE 015:2018. *Colorimetry, 4th Edition*. CIE Central Bureau, Vienna, 2018.
- [2] CIE 248:2022. *The CIE 2016 Colour Appearance Model for Colour Management Systems: CIECAM16*. CIE Central Bureau, Vienna, 2022. [3] *CIE Research Strategy*. April 2020. Accessed May 3, 2022. [http://files.cie.co.at/CIE%20Research%20Strategy%20\(April%202020\).pdf](http://files.cie.co.at/CIE%20Research%20Strategy%20(April%202020).pdf)

Color prediction of monolithic and layered dental resin composites of varying thicknesses

Tejada-Casado, Maria ^a; Ghinea, Razvan ^a; Ruiz-López, Javier ^{a*};
Lübbe, Henning ^b; Perez, Maria M ^a; Herrera, Luis Javier ^c.

^a Department of Optics, Faculty of Science, University of Granada, Campus de Fuentenueva, s/n 18071 Granada, Spain. mariatejadac@ugr.es; rghinea@ugr.es; jruizlo@ugr.es; mmperez@ugr.es

^b Vita Zahnfabrik H. Rauter GmbH & Co. KG, Ballyweg 6, 79713, Bad-Säckingen, Germany. H.Luebbe@vita-zahnfabrik.com

^c Department of Computer Architecture and Computer Technology, E.T.S.I.I.T. University of Granada, s/n 18071, Granada, Spain. jherrera@ugr.es

* jruizlo@ugr.es

Abstract. Objectives: Resin composite is the material of choice for direct anterior restorations. Newer composites are offered with different translucency levels, usually referred as dentin and enamel shades which are layered to mimic the optical properties of the teeth. The main objective of this study was to develop a regression predictive method for color estimation of monolithic and layered dental resin-based composites of varying thicknesses.

Material and method: Monolithic and bi-layer pellets of 2M2, 3M2 and 4M2 shades of VITAPAN Excell were used in this study. The monolithic samples were manufactured at 5 different thicknesses within 0.5–2.5 mm range while 14 bi-layered samples were manufactured by combining different clinically relevant thicknesses of dentine and corresponding enamel shades. A non-contact spectroradiometer (PR 670, Photo Research) with CIE 45°/0° geometry was used to measure the spectral reflectance of all samples over a standard black background. Second degree polynomial regression was used to estimate the CIE L*a*b* color coordinates. CIEDE2000 total color difference (ΔE_{00}) was used as performance tool, by comparative assessment with 50:50% acceptability (AT) and perceptibly (PT) thresholds for dentistry.

Results: For color prediction of monolithic samples, mean color difference among predicted and measured (real) color was $\Delta E_{00} = 1.24$, with 80% of the color differences (ΔE_{00}) lower than AT and 46.6% lower than PT. In the case of the bi-layered samples, the mean color difference among predicted and measured (real) color was $\Delta E_{00} = 0.87$, with 86.6% of the ΔE_{00} lower than AT and 53.3% lower than PT.

Conclusions: The proposed predictive method allowed color estimation of monolithic and layered dental resin-based composites of varying thicknesses with a high degree of accuracy. These results open the way for custom design and manufacture of dental resin composites and could be a useful tool for the clinical success of dental restorations.

Keywords: predictive method, color coordinates, color thresholds, spectroradiometry, dental materials.

Acknowledgements: The authors acknowledge funding support from the R&D&I projects PGC2018-101904-A-I00 and VITA Zahnfabrik H. Rauter GmbH & Co. KG (OTRI Contract 4346).

Effect of thickness and printing angle on color of 3D printing dental restorative polymer-based materials

Ruiz-López, Javier^a; Espinar, Cristina^b; Della Bona, Alvaro^c;
Tejada-Casado, Maria^{a*}; Pulgar, Rosa^b; Perez, Maria M^a.

^a Department of Optics, Faculty of Science, University of Granada, Campus de Fuentenueva, s/n 18071 Granada, Spain. jruizlo@ugr.es; mariatejadac@ugr.es; mmperez@ugr.es

^b Department of Stomatology, Faculty of Dentistry, University of Granada, Colegio Máximo, Campus de Cartuja s/n 18071. Granada, Spain. cristinaesppul@hotmail.com; rpulgar@ugr.es

^c Postgraduate Program in Dentistry, Dental School, University of Passo Fundo, Passo Fundo, Brazil. dbona@upf.br

* mariatejadac@ugr.es

Objective: Digital technology has led to a breakthrough in restorative dentistry. This allowed development of a large variety of 3D printed materials with different applications in dentistry. This study explores the effect of thickness and printing angle on the color of recent 3D printed dental restorative polymer-based materials.

Materials and Methods: Specimens of 0.5, 1.0, 1.5 and 2.0mm thick (n=3) corresponding to A1, A2 and A3 shades of Freeprint® Temp (DETAX GmbH, Germany) were manufactured using a DLP printer (Asiga Max UV 385) with a 62microns pixel resolution and 0° and 90° printing angles. CIE L*a*b* color coordinates of all samples were calculated from spectral reflectance measurements over a black background using a spectroradiometer PR-670, CIE D65 illuminant and the CIE 45°/0° geometry. CIEDE2000 color difference (ΔE_{00}) between samples with different thicknesses and printing angles, for all shades, were evaluated by comparative analysis with corresponding 50:50% perceptibility (PT) and acceptability (AT) thresholds.

Results: L*, a* and b* coordinates increase with thickness of the sample, with ΔE_{00} greater than AT (1.8 units) for all shades. When different printing angles were used for manufacturing, the color differences found for each shade were $\Delta E_{00} (0^\circ-90^\circ) A1 = 2.6, 1.0, 2.5, 1.4$; $\Delta E_{00} (0^\circ-90^\circ) A2 = 0.7, 0.6, 1.0, 3.0$ and $\Delta E_{00} (0^\circ-90^\circ) A3 = 0.9, 0.4, 1.2, 2.1$ for 2.0, 1.5, 1.0 and 0.5mm thick samples, respectively. Except for A1 and for 0.5mm thick samples, $PT < \Delta E_{00} > AT$ were registered. Thus, in general, color change due to difference in printing angle is visually perceptible and depends on the thickness and shade of the sample.

Conclusions: Color of 3D printed dental polymer-based materials is influenced by its thickness and the used printing angle. Such behavior must be considered by dental technicians to achieve an appropriate dental restoration.

Keywords: 3D printing, Color, Dental restorative polymer.

Acknowledgements: The authors acknowledge funding support from research projects: P20-00200 from the Government of Andalusia, Spain; PGC2018-101904-A-I00 from the Spanish Ministry of Science, Innovation and Universities, Spain; A.TEP.280. UGR18 grant from the University of Granada, Spain.

Standardization of Diffractive Optical Surfaces

Michael Pfeffer

IΦOS – Institute for Photonic Systems, University of Applied Sciences Ravensburg-Weingarten, 88250 Weingarten (Germany)

pfeffer@rwu.de

Abstract. Although optical elements with diffractive features exist since many years, fabrication processes for these are still not as common as those for corresponding purely refractive optical elements. This is mainly due to primarily non-mechanical fabrication processes such as lithographic and replication techniques, arising the necessity to develop new manufacturing, testing and handling skills of the technicians. Moreover, up to ten times more parameters are required to characterize and tolerance the complex discontinuous nanometric surface geometries. Starting from a general analysis of the current situation in optical industry, the following issues will be addressed: First, general types of corresponding material-, coating-, manufacturing- and drawing-standards will be discussed. Here, a special focus is on standardization issues of fabrication and testing including the related dimensioning and tolerancing. Second, in order to confine the term “diffractive feature” a classification of diffractive optical surfaces will be developed. Finally, this paper gives an introduction to the newly published ISO-standard ISO 10110-16 including application examples.

Keywords: Diffractive optical surfaces, standardization of optical features, ISO 10110-16

Optical design for Sport Optics

João Tiago Silva

Leica – Aparelhos Ópticos de Precisão, S.A.
Rua da Leica, 55 – 4760-810 Lousado VNF - Portugal

joao.tiago.silva@leica-camera.com

Abstract. T&I department at Leica Camera AG works mainly in three different fields: technology development, product development and product industrialization. To launch a product into the market with some required features, quality and cost, the three steps above must be very well synchronized.

As an example, the process could start from an idea of market needs, followed by a benchmark on technology available for that end. The product development starts whenever all the technologies needed are within an high Technology Readiness Level (TRL).

The development of a rangefinding binocular has to consider analogic binocular, laser rangefinding and augmented reality technologies synchronized all together. For the first, geometrical optics is considered to minimize aberrations, the second photonic components as Laser diodes and Avalanche photo diodes (APD) should be optimized positioned to do the measurements and finally a display with user relevant information must be projected into the visual path of the binocular.

To deliver the newly developed product to the market, an industrialization stage must be taken into account. At this stage a MonteCarlo analysis using production and adjustment tolerances for the process is done in collaboration with the process engineers.

Keywords: Optical Design, Range Finding

Acknowledgements: Leica – Aparelhos Ópticos de Precisão, S.A.;

Photon bubble turbulence in cold atomic gases: astrophysics in the lab.

Hugo Terças

Instituto de Plasmas e Fusão Nuclear, Instituto Superior Técnico Av. Rovisco Pais 1,
1049-001 Lisboa

hugo.tercas@tecnico.ulisboa.pt

Abstract. Cold atomic gases, produced with state-of-the-art laser cooling techniques, are excellent platforms to simulate astrophysics phenomena, as photons and atomic species interact in a self-consistent matter, just like in stars. In the particular case of near-resonant laser cooling, the light transport inside the atomic cloud is diffusive, and the photon residence time can increase up to five order of magnitude in respect to its free-space (off-resonant) value. For particular conditions, the diffusive light interacting with the cold atomic gas may trigger some sort of photon bubbling turbulence, in analogy to what happens at the interior of some stars. We experimentally report on the observation of photon bubble turbulence in cold Rubidium gases, and discuss the excellent agreement with the theoretical model for the photon bubbling instability.

Keywords: photon bubble turbulence, quantum simulation, astrophysics, dynamical instability

Experimental turbulent states with paraxial fluids of light in photorefractive media

Tiago D. Ferreira^{1,2}, Nuno A. Silva^{1,2}, Duarte Silva^{1,2}, Vicente Rocha^{1,2},
Carla C. Rosa^{1,2}, and Ariel Guerreiro^{1,2}

¹ Department of Physics and Astronomy, Faculty of Sciences, University of Porto, Rua do Campo Alegre, 4169-007 Porto, Portugal.

² INESC TEC, Centre of Applied Photonics, Rua do Campo Alegre 687, 4169-007 Porto, Portugal

tiagodferreira@hotmail.com

Abstract. The analogy between a quantum fluid and light propagating in nonlinear optical materials allows researchers to investigate quantum-like complex dynamics in faithful two-dimensional, more predictable, and affordable experimental setups [1]. Turbulence is a good example of a complex and not fully comprehended behavior that can be explored and studied in a controllable manner using these fluids of light [2]. In this work, we take advantage of these similarities and explore the formation of turbulent regimes in a fluid of light disturbed by an all-optical defect with a photorefractive crystal as a nonlinear medium. These states are created by working above the superfluid regime, where the emission of vortex pairs, a hallmark of turbulence dynamics, occurs. Using a holographic technique, we can reconstruct the complex representation of the field (amplitude and phase) and examine the presence of energy cascades in the incompressible component of the kinetic energy. These energy cascades are a signature of turbulent states [3], and in this work, we show how to study them in a controllable manner. The experimental results are compared with numerical simulations, revealing similar dynamics with the experimental analogue simulator.

Keywords: Fluids of light, Turbulence, Optical Analogues, Photorefractive media, GPGPU supercomputing

Acknowledgements:

This work is financed by National Funds through the Portuguese funding agency, FCT - Fundação para a Ciência e a Tecnologia, within project UIDB/50014/2020. T.D.F. is supported by Fundação para a Ciência e a Tecnologia through Grant No. SFRH/BD/145119/2019. N.A.S. also acknowledges the financial support of the project “Quantum Fluids of Light in Hot Atomic Vapors”, supported by FCT in collaboration with the Ministry of Education, Science and Technological Development of the Republic of Serbia.

References:

- [1] Carusotto, I. 2014. “Superfluid light in bulk nonlinear media”. *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences* 470, no. 2169: Article number 20140320. <https://doi.org/10.1098/rspa.2014.0320>.
- [2] Silva, N. A., T. D. Ferreira, and A. Guerreiro. 2021a. “(INVITED) Exploring quantum-like turbulence with a two-component paraxial fluid of light”. *Results in Optics 2*: Article number 100025. <https://doi.org/10.1016/j.rio.2020.100025>.
- [3] Kolmakov, G. V., P. V. E. McClintock, and S. V. Nazarenko. 2014. “Wave turbulence in quantum fluids”. *Proceedings of the National Academy of Sciences of the United States of America* 111, no. SUPPL.1: 4727-34. <https://doi.org/10.1073/pnas.1312575110>

Expansion Dynamic and Characterization of Stagnation Layer in Laterally Colliding Plasmas: Dependence of Observation Bandwidth and Plasma Plume Separation

Haider M. Al-Juboori^{1,*}, Tom McCormack²

¹ Dept. of Electronics Engineering and Communications, Faculty of Engineering, South East Technological University, Carlow, Ireland.

² School of Physics, University College Dublin, Belfield, Dublin, Ireland.

* haider.aljuboori@setu.ie

Abstract. The colliding laser-produced plasma (CLPP) has a wide range of applications in various contexts, that might start with astrophysical applications or pulsed laser deposition or Laser-induced breakdown spectroscopy, which is a powerful analytical technique for elemental analysis and material identification.

In CLPP experiments, the stagnation layer might form at the interface region when two dense laser-induced plasmas collide [1], and the degree of stagnation can be diagnosed by the collisionality parameter that is used to determine what kind of interaction will take place, i.e., soft or hard stagnation [2].

Our experimental present the results of the temporal, spatial and semi-spectrally imaging of colliding plasmas of aluminium and silicon targets. The analysis is focused on describing the velocity of the expanding plasma front for the interaction zone. The aim of the work presented here is to further advance and study colliding plasma techniques, as well as other methods to realize and control species density and expansion, with a view to a deep understanding of these complex mechanisms and optimising emission in the visible wavelength range.

All investigation sequences were based on a similar experimental setup, where two different focusing lenses were used with an effective focal length (EFL) of approx. 100mm or 125mm to achieve seed separation around 1.66mm or 125mm, respectively. Time-resolved emission imaging was employed to track the stagnation layer's size and shape, which might act as a signature of hard versus soft stagnation.

The study provides a considerable amount of detailed data related to the expansion velocity of the interaction zone which extends the understanding of the behaviour of particular species within colliding laser-produced plasmas.

Keywords: Laser-induced plasma, LIBS, Colliding plasma systems, Stagnation layer, Emission imaging.

References:

- [1] Al-Juboori H., McCormack T., "Digital nanosecond imaging architecture and analytical tracking technique of colliding laser-produced plasma", *Optical and Quantum Electronics*, 54/321, (2022). <https://doi.org/10.1007/s11082-022-03734-4>.
- [2] Al-Juboori, Haider M., N. A. Malik, and T. McCormack. "Investigations on the effect of target angle on the stagnation layer of colliding laser produced plasmas of aluminum and silicon." *Physics of Plasmas* 28, no. 12: 123515, (2021). <https://doi.org/10.1063/5.0069277>

On the total estimation of the electromagnetic field in the focal area with no interaction with the media

David Maluenda^{1*}, Marcos Aviñoá¹, Kavan Ahmadi¹, Artur Carnicer¹
and Rosario Martínez-Herrero²

¹ Universitat de Barcelona (UB), Departament de Física Aplicada, Martí i Franquès 1,
08028 Barcelona, Spain

² Departamento de Óptica, Facultad de Ciencias Físicas, Universidad Complutense de
Madrid, Ciudad Universitaria, 28040 Madrid, Spain

* dmaluenda@ub.edu

Abstract. The potential offered by highly focused fields has been demonstrated in last years. The design of these beams to provide them with the properties required in each situation continues to be a challenge, where it is essential to take into account the distribution of polarization and phase along the beam. In addition, it is also crucial to bear in mind not only the transverse components of the field, but also the longitudinal one. Moreover, this component parallel to the beam propagation direction often plays the most relevant role. However, experimentally detecting the complex amplitudes of the three components of the electromagnetic field to foresee the properties of the beam is not a simple task. Although what refers to the transverse components can be studied simply by taking polarimetric images in a conventional way, as soon as we deal with a three-dimensional field, knowing the longitudinal component becomes mandatory. In this talk, we review several techniques to detect experimentally the contribution of the longitudinal component. These methods usually require specially designed optical elements to extract light from the focal zone in an invasive manner or they have a very limited signal-to-noise ratio [1-3]. In addition, we discuss a new approach to estimate the entire electromagnetic field using the transversal Stokes images recorded on different transverse planes near the focus [4]. In this way, we computationally retrieve the phase of each component and finally we infer the longitudinal component by means of the Gauss's law.

Keywords: Optical Physics, Polarization, Fields in the focal area.

Acknowledgements: Funding: Grants PID2019-104268GB-C21 and PID2019-104268GB-C22 funded by Ministerio de Ciencia e Investigación MCIN/AEI / 10.13039/501100011033.

References:

- [1] Novotny, L., Beversluis, M., Youngworth, K. and Brown, T. "Longitudinal field modes probed by single molecules." *Phys. Rev. Lett.* **86**, 5251 (2001).
- [2] Wang, J., Wang, Q. and Zhang, M. "Development and prospect of near-field optical measurements and characterizations." *Front. Optoelectron.* **5**, 171–181 (2012).
- [3] Alférov, S., Khonina, S. and Karpeev, S. "Study of polarization properties of fiber-optics probes with use of a binary phase plate." *JOSA A* **31**, 802–807 (2014).
- [4] Maluenda, D., Aviñoá, M., Ahmadi, K., Martínez-Herrero, R. and Carnicer, A., "Experimental estimation of the longitudinal component of a highly focused electromagnetic field." *Sci Rep* **11**, 17992 (2021).

Contribution to the improvement of the correlation filter method modal analysis with a spatial light modulator

David Benedicto¹, M. Victoria Collados¹, Juan C. Martín¹, Omel Mendoza-Yero²,
Juan A. Vallés¹, Jesús Atencia¹

¹Department of Applied Physics and I3A, Faculty of Sciences, University of Zaragoza, C/P. Cerbuna 12, 50009, Zaragoza, Spain

²Photonics Research Group, GROC UJI, Ultrafast Optics Area, Universitat Jaume I, Av. Vicent Sos Baynat s/n, 12071, Castelló de la Plana, Spain

dbenedicto@unizar.es

Abstract. It has been proved that it is possible to obtain the full information of the optical field at a waveguide output end employing the correlation filter method (CFM), just by measuring the modal amplitudes and relative phases of the structure modes [1]. Achieving a full modal decomposition of light is of great interest for some applications (i.e. mode division multiplexing, mode converters, large mode area designs, etc.) and it also allows us to study the transmission properties of waveguides, of particular importance due to the physical insight that can be obtained (i.e. beam quality, mode coupling, angular momentum, etc.).

While implementing this mode analysis setup, there are different factors that can influence and worsen its performance (i.e. system alignment, filter adjustment, a priori mode computation, laser instabilities, etc.). In this work we propose a set of procedures that can help us reduce the instabilities and imprecisions of the mode analysis performance. We have tested all of them with a conventional SMF-28 fiber excited at 632 nm which presents six LP propagation modes. In order to implement the correlation filters we have used a phase-only spatial light modulator (SLM), encoding the complex amplitude by using the double phase method (DPM) [2]. First of all we have studied the influence of the mode normalization in the DPM inherent noise term, concluding that it can be avoided by means of an appropriate normalization. Then, we have used the symmetries of the LP modes in an effort to improve the SLM transversal alignment (through both LP_{11}^e and LP_{11}^o modes) and the system magnification (through the LP_{02} mode). These symmetries, which can be found in different set of modes, help us to smoothly correct the adjustment, thus improving the modal analysis results. Finally, we propose a more robust method to measure the phase difference between modes, by performing more than just two measurements (as it is common) and acquiring the phase through a function fit. This method allows us to particularly reduce both the laser and fiber position instabilities. Finally, we show the experimental performance of the modal analysis procedure by comparing two measured intensity distributions with their reconstruction departing from the modal analysis results.

Keywords: filter correlation method, mode analysis, spatial light modulator, double phase method.

References:

- [1] T. Kaiser, D. Flamm, S. Schröter and M. Duparre, Optics Express, 17, 9347 (2009).
- [2] V. Arrizón and D. Sánchez-De-la-Llave, Applied Optics, 41, 3436 (2002).

Design concepts of a new imaging system for a high-intensity XUV source beam by colour centres excitation in lithium fluoride crystals

Haider M. Al-Juboori^{1,*}, Serhiy Danylyuk²

¹Dept. of Electronics Engineering and Communications, Faculty of Engineering, South East Technological University, Carlow, Ireland.

²Fraunhofer-Institute for Laser Technology ILT, Steinbach str. 15,52074, Aachen, Germany.

* haider.aljuboori@setu.ie

Abstract. Stable colour centre production in lithium fluoride (LiF) crystals can employ as a high-spatial-resolution imaging tool for extreme ultraviolet (XUV) irradiation, as well as the possibility for images of the unfocused beam and the beam focused by a multi-layer mirror.

The LiF crystal sensitivity has sufficient to impress high-contrast photo-luminescent patterns with XUV single-pulse irradiation on an area up to 40mm². The suggested imaging technique, using LiF as a detector, can contribute to reducing the lack of sufficient knowledge for XUV beam characterization and profile featurization which can open a very wide range of XUV metrology and tomography applications.

The experimental results explain the concepts of detection of high-intensity source at 13.5nm using a YAG:Ce scintillator crystal embedded with a CMOS camera, additionally using LiF as a 2D high-resolution detector, as shown in Figure (1), and the work shows investigations outcomes and improvement procedure and analysis.

The results demonstrate the potential of LiF crystals as a sub-micrometre resolution two-dimensional imaging tool for XUV irradiation applications. Moreover, The research study explains the optimization sequences of the new imaging technique that will play an important role to predict the achievable spot size, geometry, beam profile and intensity distribution, as well as the characterization complexity of XUV source features.

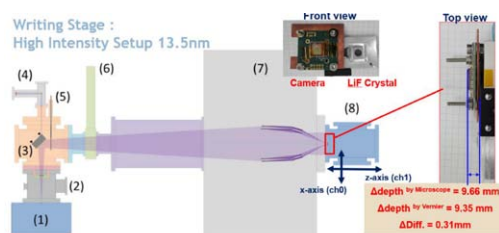


Figure (1): Scheme of the experimental setup with source (1), 6-way-cross connector (2), multilayer mirror (3), reference diode (4), removable collector blocker (5) (not visible in the photograph), gate valve (6), collector chamber (7) and sample chamber (8).

Keywords: colour centre production, instrumentation for new light sources, imaging system and digitization processing.

Acknowledgements: This work is associated under framework partnership agreement FPA-2012-0033 of EXTATIC project for EU FP7 Erasmus Mundus Joint Doctorate Program. The authors acknowledge the members of the EXTATIC academic committee for their continuing support.

Rubber vulcanization method for FBG pressure sensors

Leandro Avellar^{1*}, Anselmo Frizera¹, Camilo Diaz¹, Arnaldo Leal-Junior¹

¹ Graduate Program in Electrical Engineering, Federal University of Espírito Santo, Vitória-ES, 29075-910, Brazil

* leandro.avellar@edu.ufes.br

Abstract. Vulcanization is a widely used process in industries for diaphragms fabrication, allowing the optimization of rubber properties, providing higher tensile, resistance to expansion, and higher elasticity. Sensors based on fibre Bragg gratings (FBGs) have been applied to measure several parameters. One approach for measure parameters such as liquid level, pressure, and vibration is to embed the FBG in a diaphragm. In this paper, we present the experimental analysis of the vulcanization of nitrile rubbers for the construction of diaphragms used in pressure sensors based on FBGs. The vulcanization process comprises the use of two rubbers of the same thickness, which received a mixture containing solvents, resins, catalysts, and sulphur, together, in the presence of heat and pressure, formed a bonded. Tests using diaphragms with different rubber thicknesses (0.5 mm, 1.0 mm, and 1.5 mm), vulcanization temperatures (125°C, 150°C, and 200°C), and vulcanization times (2.5 min and 5.0 min) were performed to analyse the chemical degradation caused by the rupture of the elastomer cross-links. Degradation analysis was performed using digital macrography of the diaphragm surfaces in which ten images were taken at different positions. Subsequently, the stiffness of the diaphragms was analysed by tensile tests. By inspection, the parameters of temperature and time which resulted in the lowest rubber degradation were selected to embed the FBG in the diaphragm. Thereafter, the FBG signal was analysed during the vulcanization process. Also, an analysis of the diaphragms' sensitivity in a metallic structure was also carried out by measuring the Bragg wavelength variation during a compression test. Results of the visual inspection (via software) show that diaphragms vulcanized at 125°C showed smaller areas of degradation regardless of the time (2.5 minutes or 5.0 minutes). Diaphragms with 0.5 mm rubbers showed an area degradation mean of 17.5%, whereas 1.0 mm rubbers showed a 14.5% area degradation mean, and 1.5 mm rubbers showed an 11.0% area degradation mean. In addition, there is a higher standard deviation of the degraded area for temperatures of 150°C and 200°C, showing an inconsistency of vulcanization for these temperatures. Moreover, the greater thickness (higher the density of cross-links), the smaller the degraded area for the same temperature and vulcanization time. Tensile test results using the diaphragms vulcanized at 125°C presented stiffness of 29.59 N/mm, 41.95 N/mm, and 72.01 N/mm, whereas the diaphragms vulcanized at 150°C presented 39.69 N/mm, 48.25 N/mm and 78.29 N/mm stiffness. Thus, for the same thickness in the rubber, the higher vulcanization temperature results in a higher stiffness of the material, where stiffness is directly related to the reduction of cross-links due to the degraded area of the high temperature. Results of the sensitivity test using diaphragms vulcanized at 125°C showed a pressure sensitivity of 11.67 kPa/mm and wavelength sensitivity of 456.1 pm/mm for 0.5 mm rubber thicknesses, 18.04 kPa/mm pressure sensitivity, and 112.3 pm/mm wavelength sensitivity for 1.0 mm rubber thickness and 31.55 kPa/mm pressure sensitivity and 913.8 pm/mm wavelength sensitivity for 1.5 mm rubber thickness. It concludes that the 0.5 mm rubber vulcanized diaphragm obtained higher sensitivity when comparing pressure and wavelength.

Keywords: (Fibre Bragg Gratings, Diaphragm, Vulcanization, Rubber)

A FBG based sensor for horizontal displacement measurements of a small scale tailing dam model.

Willian L. O. Filho, Marcelo M. Werneck and Regina C. S. B. Allil

Electrical Engineering Program (PEE), Federal University of Rio de Janeiro (UFRJ),
Rio de Janeiro, Brazil

Willian.filho@coppe.ufrj.br

Abstract. The Brazilian mining disasters in the state of Minas Gerais has motivated the development of several studies aimed at increasing the safety of tailings dam [1]. The present work consists in the development of a novel sensor based on FBGs to measure the horizontal displacements of an iron ore tailings dam scale model, built to simulate liquefaction triggers. The sensor was built with a slender acrylic bar with 1 m of length, 15 mm of width and 3 mm of thickness. The FBGs were manufactured using a Nd:YAG laser, and characterized in strain and temperature in the Instrumentation and Photonics Laboratory of COPPE/UFRJ. The strain variations measured by the FBGs were converted into horizontal displacements through the Euler-Bernouli Beam theory [2]. The sensor was interrogated using an interrogator Micron Optics si155 with a resolution of 1 pm. Two strings with five FBGs spaced at 200 mm were glued to the opposite faces of the bar in order to perform temperature self-compensation [3]. The simulation results show that the sensor has a resolution of 0.01 mm for the measurement range from 0 to 150 mm. The five deformation points obtained with the sensor will be interpolated in order to obtain a two-dimensional profile. These results will be compared with accelerometer measurements and cameras that will monitor ground displacements using the Digital Image correlation (DIC) technique. The dam model will be built in a test box with dimensions of (4 x 1 x 1) m where the sensor will be installed in order to measure the model deformations. The sensor developed in this work will generate data that will help to understand the behaviour of tailings dams subjected to triggers that can cause the phenomenon of rupture by liquefaction.

Keywords: FBG, Tailing Dams, Soil displacement measurement

Acknowledgements: The Author thanks the Coordenação de Aperfeiçoamento de Pessoal de Nível Superior (CAPES) and VALE S. A. for funding this research.

References:

- [1] Allil, R. C. S. B., Lima, L. A. C., Allil, A. S., & Werneck, M. M. (2021). FBG-Based Inclinometer for Landslide Monitoring in Tailings Dams. *IEEE Sensors Journal*, 21(15), 16670–16680. <https://doi.org/10.1109/JSEN.2021.3081025>
- [2] Gere, J. M. (2004). *Mechanics of Materials* (sixth edit). Belmont, USA: Thomson Learning.
- [3] Werneck, M. M., Allil, R. C., & Nazaré, F. V. B. (2017). *Fiber Bragg Gratings Theory, Frabrication, and Applications* (Vol. TT 114). Bellingham, Washington, USA: SPIE PRESS.

Fatigue crack growth monitoring using Electronic Speckle Pattern Interferometry

**Frederico Direito, Pedro J. Sousa, Behzad V. Farahani, Paulo Tavares,
Pedro Moreira**

INEGI – Institute of Science and Innovation in Mechanical and Industrial Engineering,
Campus da FEUP, R. Dr. Roberto Frias 400, 4200-465 Porto, Portugal

fdireito@inegi.up.pt, psousa@inegi.up.pt, bfarahani@inegi.up.pt,
ptavares@inegi.up.pt, pmoreira@inegi.up.pt

Abstract. In this work, an Electronic Speckle Pattern Interferometry system is deployed in order to monitor the growth and closure of a previously generated fatigue crack, through an innovation in discontinuity analysis, during the unwrapping process; while also measuring the in-plane displacements of the specimen in analysis. In parallel, a DIC system is also employed, performing the same analysis as ESPI, as a redundant method to confirm the results. For this purpose, Middle Tension (MT) specimens, fabricated with an initial notch, were subjected to fatigue cyclic loading, originating a crack on the flanks of said notch. At the end of the loading, the cracks are measured through the use of a travelling microscope, obtaining a reference value for the crack length. For the analysis, the specimens are mounted on a portable tensile machine, setup on an optical table, and subjected to static loading. Due to the ESPI system's nature, the analysis is always performed between an interval of force values. For each set of force values, a full analysis is performed, obtaining the crack length on both flanks of the initial notch, measuring the in-place displacement, and also calculating the strain field. As such, it is possible to monitor the crack length with the increasing load values, enabling the study of the crack closure phenomenon for low loads, and the opening curve of said crack. At the maximum load value, which corresponds to the maximum value for the fatigue cyclic loading, the crack length also corresponds to the reference value, obtained from the traveling microscope methodology. Additionally, the results obtained from DIC are in agreement with the analysis performed with the ESPI system.

Keywords: ESPI, Interferometry, Fatigue crack, Monitoring

Acknowledgements: This work was developed in the scope of the project MIAMI - Ref^o POCI-01-0145-FEDER-029339, funded by “Programa Operacional Competitividade e Internacionalização” and “Fundação para a Ciência e a Tecnologia”.

Innovative hybrid optical sensing design to simultaneously discriminate pressure and temperature.

Fábio Freitas*, Lucca Matuck, Jörg Bierlich, Marta Ferreira, Carlos Marques, Micael Nascimento

Department of Physics, University of Aveiro, Campus de Santiago, 3810-193 Aveiro, Portugal

* ffreitas@ua.pt

Abstract. In this work, hybrid optical fiber sensors based on Fabry-Perot (FP) interferometers and fiber Bragg grating (FBG) sensors were developed to simultaneously measure two external parameters, pressure, and temperature. The proposed sensor consists of a photosensitive Single-Mode Fiber (SMF), where the FBG is recorded, spliced to a small section of a Hollow-Core Fiber (HCF) (~200 m). After that, the HCF tip is submerged in a UV-photosensitive polymer, creating two cavities: one composed by air in the HCF, and the other with the polymer. These two cavities will create three light interferences, allowing the observation of two FP responses in the spectral response. Two liquid polymers with different viscosities and refractive index (RI) were used to create the hybrid sensor. After the curing process, the sensors were calibrated to both parameters in the ranges of 0.0 to 4.0 bar (steps of 0.2 bar), and 20.0 to 30.0 °C (steps of 2.0 °C), respectively. By tracking the spectral responses, and the peaks shifts of the FPs, it achieved high sensitivities for the sensor with UV-photosensitive polymer with lower viscosity (RI = 1.46) of around 0.6 nm/°C and 20.0 nm/bar. On the other side, the higher viscosity polymer (RI = 1.39) achieved a different spectral response: around -0.15 nm/bar and -0.15 nm/°C for the FP. On both sensors, the FBGs achieved nearly 9.0 pm/°C and 6.0 to 12.0 pm/bar. With these results, the sensor with the cavity from the lowest viscosity polymer presents higher pressure and temperature sensitivity values and it was simpler to make, due to the smaller curing time. In this way, the simultaneously discrimination of pressure and temperature could be achieved by using the matrixial method with the FP and FBG sensitivities. The developed sensor has potential to be used inside batteries to measure and decouple both parameters.

Keywords: Hybrid optical fiber sensors; UV-photosensitive polymer; Dual parameter discrimination; Pressure; Temperature.

Acknowledgements: The authors gratefully acknowledge the European Project “Innovative physical/virtual sensor platform for battery cell” (INSTABAT) (European Union’s Horizon 2020 research and innovation program under grant agreement No 955930), grant number BI /UI96/9971/2022, <https://www.instabat.eu/> and the financial support within the scope of the project i3n, UIDB/50025/2020 & UIDP/50025/2020, financed by national funds through the FCT/MEC. The authors also acknowledge the *Bundesministerium für Bildung und Forschung* (FKZ 03WKC03E), the *Programa Operacional Regional do Centro* (CENTRO-01-0145-FEDER-031568), the *Deutscher Akademischer Austauschdienst* and *Fundação para a Ciência e a Tecnologia* (CEECIND/00777/2018, PTDC/EEI-EEE/31568/2017).

A Fiber Bragg Grating based Accelerometer for Monitoring the Vibration of an Industrial Engine Prototype: A Preliminary Study

Mariana Silveira¹, Leticia Avellar¹, Leandro Macedo¹, Arnaldo Leal¹,
Anselmo Frizera¹, Camilo A. R. Diaz¹

¹Graduate Program in Electrical Engineering, Federal University of Espírito Santo,
Fernando Ferrari avenue, 29075-910 Vitória-ES, Brazil

marianalyrasilveira@edu.ufes.br

Abstract. Optical fibers are most commonly known as a component of communication systems that provide broader modulation bandwidth than electrical mediums. In addition to this wellknown application, they have also been intensively explored for electro-optical sensing. Regarding industrial applications, optical fiber sensors (OFS) have shown potential to overcome some drawbacks of electronic solutions due to the fiber's intrinsic characteristics. An important parameter to continuously monitor in industrial control plants is the vibration of engines, since this information is essential for fault detection and predictive maintenance. Therefore, this paper describes an optical accelerometer based on a fiber Bragg grating (FBG) and a cantilever structure for monitoring the vibration of an industrial engine prototype whose maximum operating speed is 6000 rpm (100 rps). The optical accelerometer uses an uniform FBG inscribed in a standard single mode fiber (SMF) and centred at 1550 nm. The FBG is attached to an 1-axis bronze cantilever that is coupled to the motor's gearbox to identify its vibration along the z-axis and connectorized to an optical interrogator with a sampling rate of 1 kHz. To validate the proposed system, an electronic accelerometer (IMU sensor GY-80) whose sampling rate is approximately 320 Hz was also attached to the gearbox. In addition, to compare the vibration signal signature in different parts of the motor, the bearings were also monitored via an electronic accelerometer. Experimental tests were performed adjusting the motor's rotation speed during normal operation to 15, 20, 25, 30, 35, 40, 45 and 50 rps. At each frequency, data was collected by means of a computer and processed offline. Experiments have shown that the cantilever's fundamental frequency is 220.1 Hz, which is in accordance with the simulated result. The optical fiber sensor was able to correctly identify the operation speeds of 20, 25, 35, 40, 45 and 50 rps with a maximum error of 0.011 Hz. The mean signal-to-noise ratio (SNR) of the signals provided by the optical fiber sensor was 25.8% higher than the mean SNR of the GY-80 signals. The experiments have pointed out that the vibration signals have different characteristics when measured at the bearings and at the gearbox, indicating the feasibility of multi-signals analysis for fault detection.

Keywords: FBG, Cantilever, Accelerometer, Vibration Monitoring, Optical Fiber Sensor

Azobenzene based on-fiber waveplates for polarization control

**Mendes, Manuel¹; Brás, Ricardo¹; Soares, Beatriz²; Frazão Orlando²
Raposo, Maria³; and Ribeiro P.A.³**

¹ Department of Physics, NOVA School of Science and Technology, NOVA University Lisbon, 2829-516 Almada, Portugal

² Centre for Applied Photonics, Institute for Systems and Computer Engineering, Technology and Science (INESC TEC), Rua do Campo Alegre, 687, 4150-179 Porto, Portugal

³ Laboratory of Instrumentation, Biomedical Engineering and Radiation Physics (LIBPhys-UNL), Department of Physics, NOVA School of Science and Technology, NOVA University Lisbon, 2829-516 Caparica, Portugal

pfr@fct.unl.pt

Abstract. Currently, all optical fibre polarization control devices make use of massive devices for polarization control, which often forces the light to leave the optical fibre into the air with lenses and wave plates, requiring the need for tricky alignment and high re-coupling losses. On the other hand, more modular solutions using dedicated high-birefringence fibres of the spun Hi-Bi fibre type are limited in terms of high cost and non-trivial application. In this work it is proposed novel fibre optic devices capable of controlling the polarization state based on azobenzene films. The underlying idea is to make use of the isomerization properties around the N=N bond of the azobenzene compounds; from the fact that this photoisomerization can be induced by light, resulting in changes in conformation and molecular spatial orientation, susceptible of inducing a net birefringence in the medium where these compounds are dispersed. In this work describes the dynamics of birefringence creation in azobenzene thin films in terms of film preparation conditions and conditions as solution concentration and thermal treatment and writing lasers parameters as power and polarization state. Birefringence close to 10^{-2} were shown to be reachable which allows to assemble half or quarter wave plates in a few tens of micron of film thicknesses. A discussion will be provided on the real capabilities of azobenzene devices to write birefringence and change the polarization state of a propagating wave, in reliable devices and infer about real applications in which they can be applied.

Keywords: Azobenzenes, Birrefringence, Writable Waveplates, Polarization Control

Acknowledgements: The research leading to these results has received funding from the Portuguese funding agency FCT—Fundação para a Ciência e a Tecnologia—within project UID/FIS/04559/2020 to LIBPhys-UNL and from the FCT/MCTES/PIDDAC. C.S.M. was financed by the FCT—Portuguese national funding agency for science, research and technology—through grant number SFRH/BD/135820/2018.

Optimal filtering of measured Mueller matrices using full Poincaré polarimetry

Juan Carlos Suárez-Bermejo^a, J.C.G. de Sande^b, Gemma Piquero^c, M. Santarsiero^d

^a Materials Science Department, Universidad Politécnica de Madrid, Avda. de la Memoria, 28040 Madrid, Spain

^b ETSIS de Telecomunicación, Universidad Politécnica de Madrid, Campus Sur 28031 Madrid, Spain

^c Departamento de Óptica, Universidad Complutense de Madrid, 28040 Madrid, Spain

^d Dipartimento di Ingegneria Industriale, Elettronica e Meccanica, Università Roma Tre, Via V. Volterra 62, 00146 Rome, Italy

juancarlos.suarez@upm.es

Abstract. Non-uniformly totally polarized beams contain many independent states of polarization [1]. In particular, the so-called full Poincaré beams (FPBs) present all possible states of polarization across their transverse section [2]. FPB's have been proposed for Mueller matrix polarimetry [3]. The states of polarization before and after the sample are measured by means of a polarization state analyzer consisting of a quarter wave phase plate and a linear polarizer that are positioned before a CCD camera in six different configurations [4]. For this approach, a critical point is the inaccuracy of the intensity measurement at each pixel of the CCD camera. Due to small misalignments of the optical measuring elements and the sample, displacements of the images captured by the CCD camera can occur and will introduce additional errors in the determination of the Mueller matrix. For a Mueller matrix to be physically realizable, i.e., to correspond to a real sample, it must satisfy a number of constraints [5]. This set of conditions can be cast in the form of a coherency matrix \mathbf{H} associated with a Mueller matrix \mathbf{M} [5]. The four eigenvalues of the Hermitian matrix \mathbf{H} must be nonnegative. An optimal filtering [5] can be done to eliminate any negative value of the eigenvalues in \mathbf{H} before reconstructing a new Mueller matrix \mathbf{M} . This optimal filtering has been tested with several Mueller matrices measured by full Poincaré polarimetry and it has been found that the filtering procedure leads to an overall error of the 16 elements of \mathbf{M} that is lower than the error found before optimal filtering.

Keywords: Polarimetry, Polarization, Full Poincaré beams, Mueller matrix, Optimal filtering

Acknowledgements: This work has been partially supported by Spanish Ministerio de Economía y Competitividad under project PID2019104268GB-C21.

References:

- [1] G Piquero, R Martínez-Herrero, JCG de Sande, M Santarsiero, J. Opt. Soc. Am. A **37**, 591-605 (2020)
- [2] G Piquero, L Monroy, M Santarsiero, M Alonzo, J C G de Sande, J. Opt. **20** 065602 (2018)
- [3] JC Suarez-Bermejo, JCG de Sande, M Santarsiero, G Piquero, Opt. Lasers Eng. **122**, 134-141 (2019)
- [4] J C Suarez-Bermejo, JCG de Sande, G Piquero, M Santarsiero, Chapter 3 in Advances in Optics: Reviews Book Series, Vol. 5 (Ed. S.Y. Yurish) IFSA Publishing, (2021)
- [5] J.J. Gil, Appl. Opt. **55**, 5449-5455 (2016)

Estimation of Zernike polynomials for a highly focused electromagnetic field using polarimetric mapping images and neural networks

Kavan Ahmadi* and Artur Carnicer

Universitat de Barcelona, Facultat de Física, Departament de Física Aplicada, Martí i Franquès 1, 08028 Barcelona, Spain

* klahmadi@ub.edu

Abstract. In this communication, we present a method to estimate the aberrated wavefront at the focal plane of a vectorial diffraction system. In contrast to the phase, the polarization state of optical fields is simply measurable. In this regard, we introduce an alternative approach for determining the aberration of the wavefront using polarimetric information. The method is based on training a convolutional neural network using a large set of polarimetric mapping images obtained by simulating the propagation of aberrated wavefronts through a high-NA microscope objective; then, the coefficients of the Zernike polynomials could be recovered after interrogating the trained network. On the one hand, our approach aims to eliminate the necessity of phase retrieval for wavefront sensing applications, provided the beam used is known. On the other hand, the approach might be applied for calibrating the complex optical system suffering from aberrations. As proof of concept, we use a radially polarized Gaussian-like beam multiplied by a phase term that describes the wavefront aberration. The training dataset is produced by using Zernike polynomials with random coefficients. Two thousand random combinations of polynomial coefficients are simulated. For each one, the Stokes parameters are calculated to introduce a polarimetric mapping image as the input of a neural network model designed and trained for predicting the polynomial coefficients. The accuracy of the neural network model is tested by predicting an unseen dataset (test dataset) with a high success rate.

Keywords: Wavefront sensing, Polarimetric images, Convolutional neural networks, highly focused beams

References:

- [1] Novotny L and Hecht B 2012 *Principles of Nano-Optics* (Cambridge University Press)
- [2] Maluenda D, Aviñoá M, Ahmadi K, et al. 2021 Experimental estimation of the longitudinal component of a highly focused electromagnetic field Sci Rep. 11 17992
- [3] White J, Wang S, Eschen W and Rothhardt J 2021 Real-time phase-retrieval and wavefront sensing enabled by an artificial neural network Opt. Express 29 9283-9293

The development of test station to characterize the capabilities of emission of LiDAR

N. F. Cunha^{1,*}, M. Rodrigues², F. Ferreira¹, J. Gomes², J. Linhares², S. Franco²,
F. Oliveira², N. Soares³, M. Vasilevskiy², and L. Rebouta¹

¹ Physics Center of Minho and Porto Universities, Azurém, University of Minho
4800-058 Guimarães Portugal

² Physics Center of Minho and Porto Universities, Gualtar, University of Minho
4710-057 Braga Portugal

³ Bosh Car Multimédia Portugal S.A., 4710-970 Braga, Portugal

*ncunha@fisica.uminho.pt

Abstract. Light Detection and Ranging (LiDAR) technology offers an efficient way of generating high-accuracy spatial data for a wide range of mapping and surveying applications. It has gradually being integrated as a sensor in autonomous vehicle applications, and it might become the most important technology in this field of application in the near future. Automotive industry quality and safety requirements are rigorous. Thus, these kinds of devices have to be tested in a way to ensure the quality that meets automotive original equipment manufacturer standards. The performance of the light source and beam propagation characteristics through free space are also important for a more accurate evaluation of the returned signal and the control of these parameters during the development of LiDAR systems is also critical, and can have a strong impact on its success.

To address this question, a prototype test station capable of characterising the beam quality and propagation parameters of a LiDAR system laser was developed. The main techniques of the station that enables the measurement of the different parameters are described. Among those parameters, the evaluation of the system eye safety class, wavelength peak and full width at half-maximum (FWHM), pulse duration and pulse energy, pulse repetition rate, horizontal and vertical angular resolution, the field of view and the beam propagation factor (M^2), this latter one allowing the determination of beam waist size, position and divergence. For a demonstration of the performance of this test station, a commercial spinning LiDAR, a Velodyne VLP-16 emitting at a wavelength of 913 nm, was used. The measurement of the beam propagation characteristics was performed successfully with the LIDAR working in normal operational conditions

Keywords: LiDAR, beam propagation factor M^2 , beam divergence, eye safety, Field of View

Acknowledgements: This work was supported by European Structural and Investment Funds in the FEDER component, through the Operational Competitiveness and Internationalization Programme (COMPETE 2020) [Project nº 037902; Funding Reference: POCI-01-0247-FEDER-037902] and partially supported by the Portuguese Foundation for Science and Technology (FCT) in the framework of the Strategic Funding UIDB/04650/2020.

Implementation of a Scheimpflug Lidar for Assessment of Native Aerofauna in Tropical Forests in Ecuador

Cesar Costa-Vera¹, Víctor Santos¹, Pamela Rivera-Parra², Mikkel Brydegaard³

¹Mass Spectrometry and Optical Spectroscopy Group, Lab. Espectroscopia Óptica, Dept. Física, Escuela Politécnica Nacional, 170925, Quito, Ecuador; ²Departamento de Biología, Escuela Politécnica Nacional, Quito, Ecuador; ³Department of Physics, Lund University, Lund, Sweden

cesar.costa@epn.edu.ec

Abstract. Ecuador has a great diversity of bats: in a single habitat, more than 50 species of bats can be present.[1] Insectivorous bats eat large quantities of nocturnal insects, thus contributing to the environmental balance and to regulate pests, which in turn, saves on pesticide expenditures.[2] Entomological lidars are optical tools for the non-invasive, continuous, and extensive monitoring of insects. They are better than conventional methods such as sweep nets or traps. We implemented a lidar, based on the Scheimpflug principle, as a new technique for the detection, counting, and classifying the insects in Ecuadorian ecosystems. The counting rate reaches several hundred thousand observations per day, allowing for detailed statistics [3], while operating at a kHz sampling rate. With this rate, targets can be classified according to their oscillatory properties (wing flapping). [3] Fig. 1(a) and 1(b), show the exposure time of one animal in front of the optical sensor and its position about the sensing termination point. Fig. 1(c) shows the three statistical measures used to set the detection threshold. Fig. 1(d), the total oscillating signal is shown in blue, and in red the contribution of the slow body. The most harmonics for the oscillatory signal are presented in Figure 1(e) in the power spectrum. For the first time, targets were detected through dense fog with this technology with high sensitivity in the frequency domain. With this instrument, Ecuador becomes part of a world network on remote optical sensing.

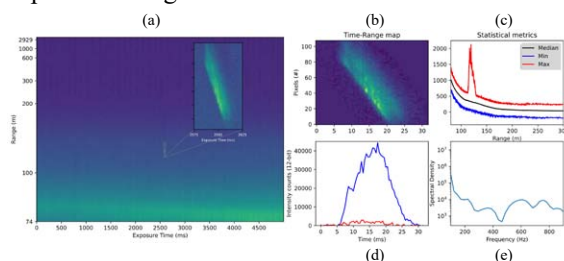


Figure 1. (a) (b) Time-range maps of an observation (La Maná). (c) Maximum, median and minimum for each range for the time window in (a). (d) The time series from the time-range maps. (e) The power spectra of the time series shown above.

Keywords: Entomological lidar; Remote sensing; Scheimpflug; Biodiversity; Measurement in Fog

Acknowledgements: The financing by Corporación Ecuatoriana para el Desarrollo de la Investigación y la Academia (CEDIA) is duly acknowledged.

References:

- [1] Aguirre, L., et al., Proc. R. Soc. Lond. B.269: 1271–1278 (2002);
- [2] Mccracken, G. F., et al., PloS one 7(8) (2012);
- [3] Brydegaard, M., SPIE Newsroom: 8–11 (2015).

Neural network computing with large-area lasers

**Xavier Porte^{1,*}, Anas Skalli¹, Nasibeh Haghighi², Stephan Reitzenstein²,
James A. Lott², and Daniel Brunner¹**

¹ Institut FEMTO-ST, Université Bourgogne Franche-Comté CNRS UMR 6174,
Besançon, France

² Institut für Festkörperphysik, Technische Universität Berlin, Hardenbergstraße 36,
10623 Berlin, Germany

* javier.porte@femto-st.fr

Abstract. High-performance computing hardware is crucial for advanced neural network (NN) computing schemes [1]. Photonics promises strong advantages in terms of parallelism, yet until now scalable and integrable concepts are scarce and partially rely on exotic substrates [2]. Here, we implement a fully parallel photonic reservoir computer based on the spatially distributed modes of an efficient and fast large-area vertical-cavity surface-emitting laser (LA-VCSEL) [3].

As photonic neuron substrate we use the complex multimode field of an injection locked LA-VCSEL of ~ 50 μm diameter emitting around 920 nm. Our LA-VCSEL was fabricated via standard commercial technology and follows a minimalistic design principle boosting its small-signal modulation bandwidths beyond 20 GHz. Noteworthy, all the photonic NN connections to- and from- the LA-VCSEL are implemented in hardware: the injected information is Boolean encoded on a digital micro-mirror device (DMD). Intra-cavity fields and carrier diffusion intrinsic to LA-VCSELs recurrently couple the >300 photonic neurons, and trainable readout weights are encoded on a second DMD and photo-detected to directly provide the computational result. We online train the readout weights to perform n-bit header recognition, XOR and digital-to-analog conversion tasks.

We operate our recurrent photonic NN in its steady state with bandwidths of several 100s inferences per second, only limited by the communications with external hardware. Further, we analyze the optimal system parameters and relevant computational metrics for neural network computing [4]. Finally, we discuss the application of our approach to a photonics

Keywords: Neuromorphic computing, Semiconductor lasers, Photonic neural networks.

References:

- [1] N. P. Jouppi, C. Young, N. Patil, and D. Patterson, "A domain-specific architecture for deep neural networks," *Commun. ACM* **61**(9), 50–59 (2018). W. J. Dally, Y. Turakhia, and S. Han, "Domain-specific hardware accelerators," *Commun. ACM* **63**(7), 48–57 (2020).
- [2] G. Van der Sande, D. Brunner, and M. C. Soriano, "Advances in photonic reservoir computing," *Nanophotonics* **6**(3), 561–576 (2017).
- [3] X. Porte, A. Skalli, N. Haghighi, S. Reitzenstein, J. A. Lott, and D. Brunner, "A complete, parallel and autonomous photonic neural network in a semiconductor multimode laser," *J. Phys. Photonics* **3**(2), 024017 (2021).
- [4] A. Skalli, X. Porte, N. Haghighi, S. Reitzenstein, J. A. Lott, and D. Brunner, "Computational metrics and parameters of an injection-locked large area semiconductor laser for neural network computing," arXiv: 2112.08947 (2021).

Photonic Neuromorphic Computing with Vertical Cavity Surface Emitting Lasers

Dafydd Owen-Newns, Weikang Zhang, Juan Alanis, Julian Bueno,
Joshua Robertson, Matej Hejda and Antonio Hurtado

Institute of Photonics, Dept. of Physics, University of Strathclyde, Technology and
Innovation Centre, 99 George Street, G1 1RD, Glasgow (Scotland, United Kingdom)

antonio.hurtado@strath.ac.uk

Abstract. Photonic approaches emulating the powerful computational capabilities of the brain are receiving increasing research interest for radically new paradigms in ultrafast information processing and Artificial Intelligence (AI). In this talk, I will review our research on neuromorphic photonic systems built with artificial optical neurons based upon Vertical-Cavity Surface Emitting Lasers (VCSELs). These are ubiquitous light-emitting optical devices found in mobile phones, supermarket barcode scanners, automotive sensors, optical transceivers in data centres, etc. Hence, there is great potential in adding intelligence and novel processing capabilities in key-enabling VCSELs for a wide range of novel technological developments.

Our research has shown that a rich variety of neuronal computational features (e.g. spiking activation/inhibition) can be reproduced optically in VCSELs at ultrafast sub-nanosecond speeds (up to 9 orders of magnitude faster than the millisecond timescales in cortical neurons) [1-3]. During the talk I will describe how we capitalise on the ultrafast neural-like behaviours elicited in VCSELs to develop novel photonic spike-based processing systems for use in strategic applications (e.g. pattern recognition, image processing) and neuronal circuit emulation at ultrafast speeds [1-3].

This talk will also introduce our recent work on laser-based, Recurrent and Spiking Neural Networks (RNNs and SNNs) for novel VCSEL-based photonic Reservoir Computing (RC) systems, yielding excellent performance across complex computing tasks at ultrafast rates [4].

Finally, this talk will review our recent work on neuromorphic systems merging in the same platform VCSELs with key-enabling Resonant Tunnelling Diodes (RTDs), for novel ultrafast, low power spiking optoelectronic artificial neuronal models, towards future chip-scale SNN implementations of light-enabled brain-inspired computing and AI hardware [5].

Keywords: Neuromorphic Photonics, Vertical-Cavity Surface Emitting Lasers (VCSELs), Resonant Tunnelling Diodes (RTDs), Photonic Neurons, Photonic Reservoir Computing.

Acknowledgements: UKRI Turing AI Acceleration Fellowships Programme (EP/V025198/1); US Office of Naval Research Global (Grant ONRG-NICOP-N62909-18-1-2027); European Commission (Grant 828841-ChipAI-H2020-FETOPEN-2018-2020); Engineering and Physical Sciences Research Council ((EP/N509760/1, EP/P006973/1)).

References:

- [1] J. Robertson et al., *IEEE J. Sel. Top. Quantum Electron.*, 26, 7700715 (2020).
- [2] J. Robertson et al., *Sci. Reps.*, 10, 6098 (2020).
- [3] J. Robertson et al., *Sci. Reps.*, 12, 4874 (2022).
- [4] J. Bueno et al., *IEEE Phot. Tech. Letts.*, 33, 920 (2021).
- [5] M. Hejda et al., *Phys. Rev. Appl.*, 17, 024072 (2022).

Dynamic speckle imaging with SVD compression

**E. Stoykova¹, M. Levchenko¹, B. Ivanov¹, V. Madjarova¹, D. Nazarova¹,
L. Nedelchev¹, A. Machikhin², J. Park³**

¹Institute of Optical Materials and Technologies, Bulgarian Academy of Sciences,
Acad. Georgi Bonchev Str., Bl.109, 1113 Sofia, Bulgari

²Scientific and Technological Center of Unique Instrumentation, Russian Academy of
Sciences, 15 Butlerova, Moscow, 117342, Russia

³Electronics and Telecommunications Research Institute, 218 Gajeong-ro,
Yuseong-gu, Daejeon, 34129, Republic of Korea

elena.stoykova@gmail.com

Abstract. Dynamic speckle imaging (DSI) produces a 2D map of activity through statistical processing of speckle patterns formed on the surface of industrial or biological objects under laser illumination. The map gives areas of different speed of processes ongoing in the objects. DSI is highly sensitive to micro-changes of the object topography in time at the expense of strong fluctuations of the map entries. For a high-quality map, storage and processing of a large number of images is required. Raw data compression becomes mandatory for monitoring a process in time when many maps are built. The raw data are 8-bit encoded images of correlated in time speckle patterns. They represent widely spread within the dynamic range of the optical sensor symmetric/asymmetric intensity distributions with a signal-dependent variance. The latter entails normalized processing for non-uniform illumination. Compression must keep intact information about the speed of intensity changes.

We propose compression of the raw DSI data by applying singular value decomposition (SVD). A specific feature of speckle images for DSI is lack of a structure with areas of close intensity values. Thus, the gain from the direct SVD application to the recorded images is rather modest because a comparatively great number of non-zero singular values should be kept for an activity map comparable in quality to the ground truth map from bitmap images. For higher compression, we proposed SVD to be applied to the 2D arrays containing the differences between the successive images. The arrays exhibit some structure due to the spatial distribution of the speed of the ongoing processes. High quality of the activity map is achieved for much smaller number of non-zero singular values and compression substantially increases. The proposed method is feasible for non-uniform illumination if the differences are normalized. The method is verified by using synthetic and experimental data.

Keywords: dynamic speckle, compression, SVD

Acknowledgements: This work was supported by National Science Fund of Bulgaria (contract KII-06-Russia/7) and by IITP grant funded by the Korea government (MSIT) (No. 2019-0-00001, Development of Holo-TV Core Technologies for Hologram Media Services). M. Levchenko thanks 2020 Plenoptic Imaging project funded by Horizon 2020 under the Marie Skłodowska-Curie grant agreement No 956770 for supporting his PhD training.

Data Augmentation in 3D Object Detection for self-driving vehicles: the role of original and augmented training samples

X Santos¹, P Georgieva², P Girão³, and M Drummond⁴

Department of Electronics Telecommunications and Informatics¹, Institute of Telecommunications^{2,4}, University of Aveiro^{1,2,4}, Bosch Cross-Domain Computing Solutions at Braga³, Portugal

xavier@ua.pt, petia@ua.pt, pedro.girao@pt.bosch.com, mvd@av.it.pt

Abstract. Safe self-driving vehicles require precise 3D Object Identification. LiDAR sensors are key in accomplishing such a task, as LiDARs produce high-definition point clouds. Such point clouds are then processed by 3D Object Detection models to finally detect objects.

Most Object Detection models require massive amounts of data to be trained. Gathering and processing this data is an expensive and time-consuming task, which is why the information taken from each sample must be fully harnessed. Such can be done through Data Augmentation.

Data Augmentation contributes significantly for improving performance, being at least as relevant as the advances in the Object Detection models themselves.

A few studies have been reported regarding the effectiveness of Data Augmentation. However, the role played by original and augmented samples has been neglected. This work reports the first-ever detailed quantification of the impact that the inclusion of original and augmented samples in a dataset has in 3D Object Detection in the context of autonomous driving. The obtained results show that although a good augmentation strategy is crucial to the model's performance, it is only as good as the quality of the original samples allows it to be.

Keywords: LiDAR sensors, computer vision, data augmentation, point cloud, autonomous driving

Acknowledgements: Project SOFTLI, financed by Bosch Car Multimedia within the framework of Project Sensible Car (POCI-01-0247-FEDER-037902), is acknowledged.

Intrinsic temperature-compensated fibre optic current/ magnetic sensor

P. Robalinho¹, O. Frazão¹, M. Melo² and A. B. Lobo Ribeiro³

¹INESC TEC—Institute for Systems and Computer Engineering, Technology and Science, R. do Campo Alegre 687, 4169-007 Porto, Portugal.

²Amplitude Portugal Lda., R. Eng. Frederico Ulrich 2650, 4470-605 Moreira da Maia, Portugal.

³University Fernando Pessoa, Faculty of Health Sciences, R. Carlos da Maia 296, 4200-150 Porto, Portugal.

paulo.robalinho@inesctec.pt

Abstract. The fibre optic current sensor demonstrated here uses the intrinsic temperature and wavelength dependence of the Verdet constant of a terbium gallium garnet (TGG) magneto-optic material and the two micro-optic linear polarizers attached, to simultaneously extract the values of temperature and the optical Faraday rotation (induced by the presence of the magnetic field due an electric current on a conductor) without any extra optical component attached to the optical sensor head. The simultaneous measurement is achieved by illuminating the sensor head with a broadband optical source and by careful signal processing of the originated channelled-spectrum, compensate the sensor's temperature dependence.

Keywords: fibre optic, sensor, magneto-optic, TGG, multiplexing

References:

- [1] Barnes N P and Petway L B 1992 Variation of the Verdet constant with temperature of terbium gallium garnet *J. Opt. Soc. Am. B* **9** 1912.
- [2] Slezak O, Yasuhara R, Lucianetti A and Mocek T 2016 Temperature-wavelength dependence of terbium gallium garnet ceramics Verdet constant *Opt. Mater. Express* **6** 3683.
- [3] Slezak O, Yasuhara R, Lucianetti A and Mocek T 2015 Wavelength dependence of magneto-optic properties of terbium gallium garnet ceramics *Opt. Express* **23** 13641.
- [4] Yasuhara R, Nozawa H, Yanagitani T, Motokoshi S and Kawanaka J 2013 Temperature dependence of thermo-optic effects of single-crystal and ceramic TGG *Opt. Express* **21** 31443.
- [5] Madden W I 1999 Temperature compensation for optical current sensors *Opt. Eng.* **38**, 1699.
- [6] Perciante C D and Ferrari J A 2005 Faraday current sensor with temperature monitoring *Appl. Opt.* **44** 6910.

Considerations involving the determination of the band gap energy by diffuse reflectance spectroscopy

Salmon Landi Jr.^{1,*}; Iran Rocha Segundo^{2,3}; Orlando Lima Jr.²; Cátia Afonso³;
Manuel F. M. Costa^{4,*}; Joaquim Carneiro^{3,*}

¹ Federal Institute Goiano, 75901-970, Rio Verde – GO, Brazil;

² ISISE, Department of Civil Engineering, University of Minho, 4800-058, Guimarães, Portugal;

³ Centre of Physics of Minho and Porto Universities (CF-UM-UP), University of Minho, Azurém Campus, 4800-058, Guimarães, Portugal

⁴ Centre of Physics of Minho and Porto Universities (CF-UM-UP), University of Minho, Gualtar Campus, 4710-057, Braga, Portugal

* salmon.landi@ifgoiano.edu.br; mfcosta@fisica.uminho.pt; carneiro@fisica.uminho.pt

Abstract. The band gap energy (E_g) of non-single-crystal semiconductors can be obtained from diffuse reflectance measurements. For this purpose, the classical theory proposed by Kubelka and Munk (K-M) and the so-called plot Tauc have been largely employed. In this work, the authors revisited the main aspects of the two-flux K-M model. For a sample with semi-infinite thickness, the ratio between the K-M absorption and scattering coefficients defines a function, named K-M function, $F(R)$, that depends only on the reflectance (R) of the sample. In addition, it is shown that in obtaining E_g the correct use of the $F(R)$ needs to take into account the nature of the electronic transition. On this matter, a recent case in which the E_g values are obtained inadequately, because E_g was obtained directly from the plot of $F(R)$ versus incident photon energy, is also discussed.

Acknowledgements: This work has been supported by the Portuguese Foundation for Science and Technology (FCT) under the framework of the Strategic Funding UIDB/04650/2020 and NanoAir PTDC/FIS-MAC/6606/2020.

Coupled two-cores integrated waveguides modal analysis

**David Benedicto, M. Victoria Collados, Juan C. Martín, Juan A. Vallés,
Jesús Atencia**

Department of Applied Physics and I3A, Faculty of Sciences, University of Zaragoza,
C/P. Cerbuna 12, 50009, Zaragoza, Spain

dbenedicto@unizar.es

Abstract. Multicore fibers are currently of great interest in optical communications due to their suitability for increasing the capacity of optical fibers and for the design of large mode area structures [1]. Writing techniques by means of strongly focused femtosecond pulsed lasers [2] facilitates the transfer of fiber-based technology to compact monolithic optical circuits. The characterization of these waveguides entails not only the difficulties of rare earth doped integrated waveguides characterization but also the issues associated with the multicore structure and with the fabrication process (i.e. ions migration, irregularities).

We present the modal analysis of coupled two-core integrated waveguides fabricated in an $\text{Er}^{3+}/\text{Yb}^{3+}$ co-doped phosphate glass by femtosecond laser writing. In order to do that, we implement the correlation filter method in a phase-only spatial light modulator (SLM). This method has been used several times in multimode fibers [3], but there is no report yet of its performance in multicore integrated waveguides. In this work, we first show that the special symmetry of the two-core waveguides with identical cores allows us to perform the modal analysis with a phase-only element, without the need of encoding any complex amplitude distribution. Then, we compare the theoretical modal weights with the measured ones as a function of the fiber excitation position and the waveguide core-to-core separation. The selection of the focal plane lens position to perform the modal analysis is critical, and both the asymmetries between cores and the gap between the two-core waveguide and the excitation fiber play a fundamental role on the modal behaviour. However, this phase-only modal analysis method allows us to reproduce the modal weights theoretical behaviour. The advantages of its use are clear: on one side, the SLM alignment is much simpler. On the other hand, there is no need to use any technique to implement complex amplitudes in a phase-only device. This considerably simplifies the experimental setup adjustment.

Keywords: multicore fiber, femtosecond laser writing, modal analysis, correlation filter method

Acknowledgements: We would like to thank the Laser Processing Group of the Institute of Optics of the Centro Superior de Investigaciones Científicas (CSIC) for the fabrication of the multicore waveguides.

References:

- [1] K. Saitoh and S. Matsuo, *Journal of Lightwave Technology*, 34, 55 (2016).
- [2] T. T. Fernandez, M. Sakakura, S. M. Eaton, B. Sotillo, J. Siegel, J. Solis, Y. Shimotsuma and K. Miura, *Progress in Materials Science*, 94, 68 (2018).
- [3] T. Kaiser, D. Flamm, S. Schröter and M. Duparré, *Optics Express*, 17, 9347 (2009).

Analysis of power transfer between two multi-core fibers with long-period gratings

Liliana M. Sousa^{1,2,*}, Margarida Facão^{1,3}, Rogério Nogueira², Ana M. Rocha²

¹ Universidade de Aveiro, Aveiro, Portugal

² Instituto de Telecomunicações, Aveiro, Portugal

³ i3N, Universidade de Aveiro, Aveiro, Portugal

*sousa.liliana@ua.pt

Abstract. Multi-core fibers (MCFs) have been proposed to increase the capacity over an optical fiber by spatial division multiplexing. Some devices for MCF systems were developed, but they are still inefficient, sensitive and/or complex. Long-period gratings (LPGs) may play a role in the development of efficient in-line MCF components. LPGs are periodic perturbations of the optical fiber refractive index that promote the coupling between the core mode and a cladding mode at a resonant wavelength [1]. We have numerically demonstrated a single-mode fiber (SMF) to MCF coupler based on LPGs, which showed promising results [2]. The SMF cladding is reduced to increase the power transfer between the fibers. If the fibers are similar, i.e., an MCF replaces the SMF, the coupler will show high power transfer without any further changes. Furthermore, techniques to inscribe gratings in just one core of a 4-core fiber were already developed [3]. Here, we analyse the coupling between two MCFs using couple-mode theory [1] and the scheme of [2], with the input fiber as an MCF with an LPG inscribed in one core. First, the pump light is launched into the input core of the MCF and the optical power is transferred to the cladding due to the LPG inscribed in the core. The optical power in the cladding is then transferred to the other MCF cladding by evanescent field coupling. The optical power in the cladding of the output MCF is distributed by all its cores due to the identical LPGs inscribed in them. As the LPGs are wavelength selective, the other signals are not affected. We optimized the LPGs period, their lengths and offset distance to increase the power transfer at 1480 nm. We achieved a power transfer of 92% of the input power, distributed by all MCF cores, in 10.6 cm of length.

Keywords: Multi-core fibers, Long-period Gratings, Coupler

Acknowledgements: This work is funded by FCT through FEDER, and COMPETE 2020 and national funds under the projects UIDB/50025/2020, UIDP/50025/2020, LA/P/0037/2020UIDB/50008/2020-UIDP/50008/2020, POCH Program SFRH/BD/144226/2019 and contract program 1337.

References:

- [1] T. Erdogan, "Fiber grating spectra," *J. Light. Technol.*, vol. 15(8), pp. 1277 - 1294 (1997).
- [2] L.M. Sousa, et. al, "Long-period grating based coupler for multi-core fiber systems," *J. Light. Technol.*, vol. 39(18), pp. 5947-53 (2021).
- [3] W. Bao, et al., "Selective fiber Bragg grating inscription in four-core fiber for two-dimension vector bending sensing," *Optics Express*, vol. 28(18), pp. 26461-26469 (2020).

Indoor guidance of Automated Guided Using Visible Light Communication

Paula Louro^{1,2}, Manuela Vieira^{1,2,3}, Manuel Augusto Vieira²

¹ DEETC-ISEL-IPL, R. Conselheiro Emídio Navarro, 1949-014 Lisboa, Portugal

² CTS-UNINOVA, Quinta da Torre, Monte da Caparica, 2829-516, Caparica, Portugal

³ DEE-FCT-UNL, Quinta da Torre, Monte da Caparica, 2829-516, Caparica, Portugal

plouro@deetc.isel.ipl.pt

Abstract. In recent years, devices with wireless communication capabilities have generated a growing interest in indoor navigation. Indoor localization and proximity detection is becoming increasingly attractive due to the emergence of the Internet of Things (IoT) and the inherent end-to-end connectivity of billions of devices. In a closed space, GPS has poor, unreliable performance, requiring alternative techniques and wireless technologies. In this paper, we propose the use of Visible Light Communication (VLC) to support guidance and communication for signaling in an indoor environment. Visible Light Communications (VLC) is a precursor of optical communication for large scale-integration with other conventional communication technologies, and a strong candidate for next generation of indoor interconnection and networking, in parallel with radio communications. Main characteristics of VLC include high capacity, unregulated spectrum, immunity to RF electromagnetic interference, spatial confinement, and low power consumption, making it an energy efficient green technology.

This research focuses mainly on the development of navigation VLC systems, transmission of control data information, and decoding techniques to support positioning and guidance of automated guided vehicles. The communication system uses RGB white LEDs as emitters and pinpin photodiodes with selective spectral sensitivity as receivers. Downlink communication is established between the infra-structure and the automated guided vehicles. The illumination infrastructure transmits operates in two different communication mode. In the standard mode it transmits the geographic position, which is delivered to every vehicle under the coverage of the lamp. In the request mode it additionally transmits instructions to the vehicle related to guidance directions or other instructions. The transduced signal measured by the receiver unit is a multiplexed signal, resultant from different optical excitations. The decoding strategy of the multiplexed signal is based on accurate calibration of the output signal and uses bit error control methods to reduce the BER of the system. In this paper, we will describe the coding schemes and decoding algorithms, as well as the characteristics of transmitters and receivers.

Cooperative Traffic Control using Visible Light Communication.

**Manuel Augusto Vieira^{1,2}, Manuela Vieira^{1,2,3}, Paula Louro^{1,2},
Alessandro Fantoni^{1,2}, Pedro Vieira^{1,4}**

¹ DEETC-ISEL-IPL, R. Conselheiro Emídio Navarro, 1949-014 Lisboa, Portugal ²

CTS-UNINOVA, Quinta da Torre, Monte da Caparica, 2829-516, Caparica, Portugal;

³ DEE-FCT-UNL, Quinta da Torre, Monte da Caparica, 2829-516, Caparica, Portugal;

⁴ Instituto de Telecomunicações, IST, 1049-001, Lisboa, Portugal.

mv@isel.ipl.pt

Abstract. Monitoring the network traffic status of urban roads in real-time can provide rich and high-quality basic data and allow the assessment of traffic control effects. Information and communication technologies enable optoelectronic cooperative vehicular systems with bi-directional communication, where vehicles communicate with others vehicles, road infrastructures, traffic lights and vulnerable road users.

Our work focuses on the use of Visible Light Communication (VLC) as a support for transmission of information providing guidance to drivers, as well as specific information to them. Connected vehicles communicate with one another and with the infrastructure using street lights, street lamps, and traffic signals. Using V-VLC-ready connected cars, we propose a queue/request/response approach for managing an urban intersection. In this study, the connected vehicles receive information from the network (Infrastructure-to-Vehicle, I2V), interact with each other (Vehicle-to-Vehicle, V2V) and with the infrastructure (Vehicle-to-Infrastructure, V2I), using a request distance and pose estimation concept. In parallel, an Intersection Manager (IM) coordinates the crossroad and interacts with the vehicles (I2V) using the response distance and the pose estimation concepts. The vehicles' arrival is controlled and they are scheduled to cross intersections at predetermined times to minimize traffic delays. V2I2V communication provides real-time data on queues, requests, and messages distances, including queue, request, and message travel times that influence traffic channeling in various routes. The communication is performed through VLC using the street lamps and the traffic signalling, to broadcast the information. Data is encoded, modulated and converted into light signals emitted by the transmitters. Tetra-chromatic white sources are used, providing a different data channel for each chip. As receivers and decoders, optical sensors with light filtering properties, are used. To command the passage of vehicles safely queue/request/response mechanisms and temporal/space relative pose concepts are used. A communication scenario is established and a "mesh/cellular" hybrid network configuration proposed. As a PoC, a phasing of traffic flows is suggested. The results indicate that the V-VLC system increases safety by directly monitoring critical points such as queue formation and dissipation, relative speed thresholds, as well as inter-vehicle spacing. Based on the simulated/experimental results, the proposed VLC cooperative architecture appears to be appropriate for the intended applications.

Visible Light Communication-based Indoor Navigation for Mobile Users in Large Buildings.

Manuela Vieira^{1,2,3}, Manuel Augusto Vieira^{1,2}, Paula Louro^{1,2},
Alessandro Fantoni^{1,2}, Pedro Vieira^{1,4}

¹ DEETC-ISEL-IPL, R. Conselheiro Emídio Navarro, 1949-014 Lisboa, Portugal

² CTS-UNINOVA, Quinta da Torre, Monte da Caparica, 2829-516, Caparica, Portugal;

³ DEE-FCT-UNL, Quinta da Torre, Monte da Caparica, 2829-516, Caparica, Portugal;

⁴ Instituto de Telecomunicações, IST, 1049-001, Lisboa, Portugal.

mv@isel.ipl.pt

Abstract. With the rapid increase in wireless mobile devices, the continuous increase of wireless data traffic has brought challenges to the continuous reduction of radio frequency (RF) spectrum, which has also driven the demand for alternative technologies. In order to solve the contradiction between the explosive growth of data and the consumption of spectrum resources, Visible Light Communication (VLC) has become the development direction of the next generation communication network with its huge spectrum resources, high security, low cost. Compared to conventional wireless communications, VLC has higher rates, lower power consumption, and less electromagnetic interferences. VLC is a data transmission technology that can easily be employed in indoor environments since it can use the existing LED lighting infrastructure with simple modifications. The main goal of this paper is a VLC based guidance system to be used by mobile users inside large buildings. The system is composed of several transmitters (ceiling luminaries) which send the map information, alerts and the path messages required to wayfinding. Tetra-chromatic white sources are used providing a different data channel for each chip. Data is encoded, modulated and converted into light signals. Mobile optical receivers, with VLC support, using joint transmission, collect the data at high frame rates, extract their location to perform positioning and, concomitantly, the transmitted data from each transmitter. An architecture based on a mesh cellular hybrid structure was used. The luminaires are equipped with one of two types of nodes: a “mesh” controller that connects with other nodes in its vicinity and can forward messages to other devices in the mesh, acting like routers nodes in the network and a “mesh/cellular” hybrid controller, that is also equipped with a modem, providing IP base connectivity to the central manager services. The luminaires, via VLC, deliver their geographic position and specific information to the users, making them available for whatever use they request. The communication protocol, coding/decoding techniques, and error control are examined. Bidirectional communication is implemented and the best route to navigate through venue calculated. We propose several guidance services and multi-person cooperative localization. The system informs the users, in real time, not only of the best route to the desired destination, through a route without clusters of users, but also of crowded places. By analysing the results, it became clear that the system not only provides self-location, but also the capability to determine the direction of travel and to interact with information received in order to optimize the route towards a static or dynamic destination.

Photonic tools for single cell analysis

Pedro A. S. Jorge^{1,2}

¹ Departamento de Física e Astronomia, Faculdade de Ciências, Universidade do Porto.
Rua do Campo Alegre, 687. 4169 007 Porto.

² Centre for Applied Photonics, INESC TEC. Rua do Campo Alegre, 687. 4169 007
Porto.

pedro.jorge@fc.up.pt

Abstract. The ability to select, separate, manipulate and monitor single cells is one of the keystones of modern biotechnology. Sensing at the single cell level can provide insights into its dynamics and heterogeneity, yielding information otherwise unattainable with traditional biological methods where average population behaviours are observed.

For this purpose, minimum invasive techniques are required and trapping and accurate manipulation without physical contact is an important requirement. Presently some of the most attractive solutions available rely on the use of optical trapping techniques using single beam optical tweezers. While many different approaches have been reported and successfully applied for in vitro, and even some in vivo assays, there are still many challenges to overcome before this can be considered a standard tool.

In this talk, the implementation of optical systems with single cell manipulation and sensing capabilities are presented. Different strategies, from the design and fabrication of fiber optical tweezers to the implementation of automation strategies, coupled with advanced statistical analysis, for cell classification and diagnostics, will be discussed.

Keywords: (optical fiber tweezers, single cell analysis, scattering)

Acknowledgements: Work financed by ERDF - European Regional Development Fund through the Operational Programme for Competitiveness and Internationalisation - COMPETE 2020 under the Portugal 2020 Partnership Agreement and by National Funds through FCT - Fundação para a Ciência e a Tecnologia, I.P. within project MYTAG, with reference PTDC/EEI-EEE/4832/2021.

References:

- [1] (Ashkin, A.; Dziedzic, J.M.; Yamane, T. Optical trapping and manipulation of single cells using infrared laser beams. *Nature* 1987, 330, 769–771.
- [2] Luo, T.; Fan, L.; Zhu, R.; Sun, D. Microfluidic Single-Cell Manipulation and Analysis: Methods and Applications. *Micromachines* 2019, 10, 104. <https://doi.org/10.3390/mi10020104>

Generation of high-frequency photoacoustic pulses to enhance skin permeation of active molecules

**Celso P. João¹, Sofia M.-Guímaro¹, Renato Cardoso¹, João Santos¹,
Diogo A. Pereira², Luís G. Arnaut^{1,2}, Carlos Serpa^{1,2}**

¹LaserLeap Technologies, Rua Coronel Júlio Veiga Simão, CTCV, Edifício B, 3025-307 Coimbra, Portugal

²CQC-IMC, Department of Chemistry, University of Coimbra, Rua Larga, 3004-535 Coimbra, Portugal

celsopaivajoao@laserleap.com

Abstract. Skin is a complex physical barrier which protects the body against pathogens, chemical agents and physical aggressions, and prevent unregulated loss of water and salts [1]. Its barrier effect is also effective among the drugs and cosmetics making their passive topical deliver very inefficient for molecules with high molecular weight (>500 Da) [2]. As solution, the research community is searching the for new methods to increase the transdermal delivery of active molecules in localized areas of the body, minimizing their invasive nature and increasing the compliance by patients or individuals [3].

In this work, we present a painless, non-invasive transdermal delivery technique based in the release of photoacoustic pulses on the skin, “piezoporation”. During the procedure, a piezophotonic converter is placed over a specific spot of the skin, previously covered with a gel moisturizing. Gel is the base solvent for active molecules and provides the required acoustic coupling for an efficient transmission of the photoacoustic pulses to the skin. The piezophotonic converter is then lighted by 10 mJ-level, nanosecond, Q-switched laser generating high pressure amplitude, high-frequency ultrasound pulses capable to transiently destabilise the skin’s barrier, allowing an efficient permeation of large active molecules.

In pre-clinical studies, we demonstrate “piezoporation” can be used to increase the diffusion of active substances into the skin compared with a passive topical application. We show, 5 minutes of “piozoporation” are enough to increase the deposition into the skin of an anti-aging and skin whitening agent, vitamin C analogue [4] and of a drug indicated in the treatment of alopecia, minoxidil, in 15 folds. The results are obtained after 1 and 3 hours of dermal exposure to the substances, respectively. In clinical studies, we also demonstrate this technique to be used to enhance facial and dermal filling together with a high concentrated hyaluronic acid gel with a molecular weight of 20 kDa [5].

Keywords: Transdermal delivery, Skin barrier, Photoacoustics, Piezophotonic materials, Pulsed lasers

Acknowledgements: This work was funded by COMPETE 2020 (Project no. 39704/LASER-P).

References:

- [1] J. M. Jensen and E. Proksch, *G Ital Dermatol Venereol.*, 144(6): 689-700 (2009)
- [2] J. D. Bos, M.M. Meinardi, *Exp Dermatol.*, 9(3): 165-9 (2000)
- [3] A. Z. Alkilani, et al. *Pharmaceutics*, 7(4): 438-70 (2015)
- [4] S. M.-Guímaro et al., accepted for publication in *Int J Cosmet Sci.*
- [5] F. Santos et al. *Aesth. Plast. Surg.*, 42 1655 (2018)

Multifunctional liposomes containing magnetic and gold nanoparticles for cancer therapy

Mélanie R. Pereira, Elisabete M. S. Castanheira and Ana Rita O. Rodrigues

Physics Centre of Minho and Porto Universities (CF-UM-UP) and LaPMET Associate Laboratory, University of Minho, Campus of Gualtar, 4710-057 Braga, Portugal

ritarodrigues@fisica.uminho.pt

Abstract. Plasmonic magnetoliposomes are promising nanosystems for dual hyperthermia (magneto-photothermia) and local chemotherapy. The combination of magnetic and gold nanoparticles in a single nanosystem (multifunctional liposomes) enables greater efficiency, allowing to reach deep tumors and use hyperthermia as a therapeutic approach. In addition, it enables the targeting and controlled release of encapsulated drugs [1-3].

In this work, manganese ferrite nanoparticles and gold nanoparticles were prepared. The structural, magnetic and optical properties were measured by SEM, SQUID and UV/vis/NIR absorption, respectively. The gold nanoparticles were incorporated in the membrane of liposomes and the magnetic ones in the aqueous core of liposomes of Egg-PC or DPPC, resulting in multifunctional nanosystems. The transition temperature was evaluated by fluorescence anisotropy measurements and the heating capacity of the nanosystems were assessed under irradiation. The developed multifunctional liposomes are promising for combination between hyperthermia and chemotherapy, addressing a better cancer treatment with lower drug dosages and minor side effects.

Keywords: magnetic nanoparticles, plasmonic nanoparticles, multifunctional liposomes, photothermal effect, combination therapy.

Acknowledgements: FCT under Strategic funding of CF-UM-UP (UIDB/04650/2020).

References:

- [1] Namdari M, Cheraghi M, Negahdari B, Eatemadi A, Daraee H. Recent advances in magnetoliposome for heart drug delivery. *Artificial Cells, Nanomedicine, and Biotechnology*. 2017; 45(6): 1051–1057
- [2] Lim J, Majetich SA. Composite magnetic–plasmonic nanoparticles for biomedicine: Manipulation and imaging. *Nano Today*. 2013; 8(1): 98-113.
- [3] Yang W, Liang H, Ma S, Wang D, Huang J. Gold nanoparticle based photothermal therapy: Development and application for effective cancer treatment. *Sustainable Materials and Technologies*. 2019; 22: e00109.

Detection of Alzheimer's by Machine Learning-assisted Vibrational Spectroscopy in Human Cerebrospinal Fluid

Laura Arévalo¹, Olga Antonova¹, Stephen O'Brien¹, Gajendra Pratap Singh²
and Andreas Seifert^{1,3*}

¹CIC nanoGUNE BRTA, Tolosa Hiribidea 76, 20018 San Sebastián, Spain

²Singapore-MIT Alliance for Research and Technology, 138602, Singapore ³

IKERBASQUE, Basque Foundation for Science, 43009 Bilbao, Spain

* a.seifert@nanogune.eu

Abstract. Nowadays, the diagnosis of Alzheimer's disease (AD) is a complex process that involves several clinical tests. Cerebrospinal Fluid (CSF) contains common AD-related biomarkers that include amyloid beta 1-42 ($A\beta_{1-42}$) and tau proteins. In this work, we propose vibrational spectroscopy techniques supported by machine learning for the detection of AD-related biomarkers in CSF by prediction models. Vibrational spectroscopy provides the entire biochemical composition of CSF and that way small but typical physiological changes related with AD can be ascertained. CSF samples were obtained by a lumbar puncture done by clinical doctors. The liquid is filtered using ultrafiltration in such a way that the protein concentration is enriched. A 5 μL drop of each CSF sample was deposited by careful pipetting onto a quartz substrate for Raman measurements, and 3 μL was poured onto an ATR (attenuated total reflectance) crystal for FTIR (Fourier-transform infrared) measurements. The samples were dried in air for 20 min. The dried sample is analyzed with a Witec Raman microscope at 532 nm and a Bruker FTIR-ATR system. A total of 22 samples from volunteers were studied, of which some were clinically diagnosed with AD. Of each patient several measurements were performed to capture the complete variability of each CSF sample. A dataset with 610 spectra, including Raman and FTIR, were analyzed within a machine learning framework. Fig. 1a shows the spectral differences between control and AD patients for both Raman and FTIR spectra. Applying principal component analysis (PCA) to a combined dataset including Raman and FTIR unveils a clear separation between the two classes (AD vs. healthy), as shown in Fig. 1b. We found that a logistic regression model can discriminate between healthy control and AD patients with a precision of 98%, when the input for the model combines data from both vibrational spectroscopy methods. Our approach shows high discriminative capabilities and constitutes a proof of concept for an alternative and accurate tool for the diagnosis of AD.

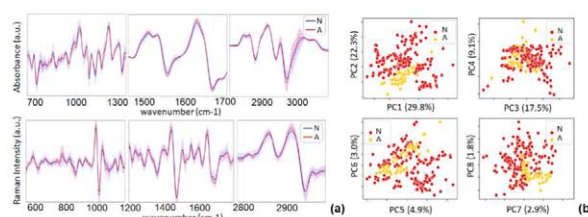


Fig. 1: (a) FTIR and Raman spectra from CSF samples of AD patients (A) and healthy control (N). (b) PCA analysis of the vibrational spectroscopy data.

Insect-Brain inspired Neuromorphic Nanophotonics

Anders Mikkelsen

Department of Physics and NanoLund, Lund University, Sweden

anders.mikkelsen@sljus.lu.se

Abstract. Combining highly efficient nanophotonic structures into artificial neural networks hold significant promise for superior hardware solutions [1]. However, we need well-defined circuit architectures and concepts, with limited size and clear functionality to develop and verify the novel concepts. Insects are capable of amazing autonomous feats well beyond current computers, such as navigating across hundreds of kilometres of unfamiliar terrain, with only a few drops of nectar as energy supply. One important module of the insect brain, conserved across species with vastly different lifestyles, is the central complex navigation circuit. This has been distilled to its fundamental neuroarchitecture and the function of a number of its components into a biologically constrained computational model [2].

We use this architecture to explore the potential of neuromorphic nanophotonic computing. We propose an artificial neural network in which the weighted connectivity between nodes is achieved by overlapping light signals inside a shared quasi 2D waveguide – a broadcasting concept. This decreases the circuit footprint by two orders of magnitude compared to existing optical solutions. The evaluation of optical signals is performed by neuron-like nodes constructed from highly efficient III–V nanowire optoelectronics [3]. This minimizes power consumption of the network. [4]. Detailed simulations of the central network parts, demonstrate feasibility and promise performance orders of magnitude beyond present hardware solutions [4].

We now expand these concepts in the European Innovation Council (EIC) project InsectNeuroNano. The vision is a novel on-chip hybrid nanostructure platform for energy-efficient, fast artificial neural networks and integrated sensor arrays. It is based on (i) neural circuit architectures found in insects [2] (ii) replacing physical interconnects by light (iii) using novel nanoscale components [3,4] and molecular dyes [5] to control and interpret signals with extreme energy efficiency. The novel neural components can be assembled into a wide spectrum of circuits and the technology platform can be integrated with standard silicon technology.

Keywords: Nanowires, III-V semiconductors, insect, neuromorphic, nanophotonic

References:

- [1] "Artificial neural networks enabled by nanophotonics." Zhang, Q., Yu, H., Barbiero, M. et al. *Light Sci Appl* 8, 42 (2019)
- [2] "An anatomically constrained model for path integration in the bee brain", T. Stone, et al., *Current Biology* 27 (2017), 3069.
- [3] "Realization of axially defined GaInP/InP/InAsP triple-junction photovoltaic nanowires for high performance solar cells", L. Hrachowina, et al., *Materials Energy Today*, (2022) 101050
- [4] "Implementing an Insect Brain Computational Circuit Using III–V Nanowire Components in a Single Shared Waveguide Optical Network", DO Winge, et. al *ACS Photon.* 7 (2020) 2787
- [5] "Ultrabright Fluorescent Organic Nanoparticles Based on Small-Molecule Ionic Isolation Lattices" J. Chen et al., *Angew Chem Int Ed Engl* 60 (2021), 9450.

Dendritic-like computation using multimode optical fibers

**Silvia Ortín, Miguel C. Soriano*, Ingo Fischer, Claudio R. Mirasso,
and Apostolos Argyris**

Instituto de Física Interdisciplinar y Sistemas Complejos (IFISC, UIB-CSIC), Campus
Universitat de les Illes Balears E- 07122, Palma de Mallorca, Spain

* miguel@ifisc.uib-csic.es

Abstract. Multi-mode and few-mode optical fibers are recently being considered for optical computing purposes. By exploiting the complex spatial and spatio-temporal transformation of the optical signals that propagate along these types of optical fibers, unconventional computing tasks such as learning of ultrafast pulses, image classification or image identification can be performed. Here we propose and numerically demonstrate the use of a few-mode fiber as an equivalent optical dendrite that mimics some of the operations performed by the dendrites of real neurons. Given that different spatial modes propagate along the fiber with different group velocities, we can consider that each group of spatial modes with equal group velocity act as a dendritic branch. In this manner, a few-mode fiber can operate as an ultra-fast spatio-temporal coincidence detector [1]. More precisely, we focus on the use of a few-mode, step-index fiber as a linear computing element that operates at 40 Gb/s data encoding rate, showing that the spatio-temporal information at the output of a few meters fiber can be efficiently used to solve header recognition tasks at the same rate of 40 Gb/s. Depending on the diameter of the few-mode fiber core, we can perform the recognition of headers with up to 6 bits, at a 1550nm wavelength operation. This becomes possible as the few-mode fiber introduces multiple delay paths and short-term memory that effectively operate as different dendritic branches, temporally mixing the input information. In the proposed scheme, the spatio-temporal information at the fiber end is photodetected and further post-processed with a simple supervised learning algorithm (logistic regression) to solve the corresponding tasks. The analogy between the optical hardware computing scheme and biological neurons could be advanced a step further by introducing nonlinearities and adaptive (plasticity) mechanisms in the input-to-output optical transformation. Since the adaptation mechanisms can operate at a slower time scale compared to the encoded information as in biological neurons, such mechanisms could be implemented by using optical elements like spatial light modulators or digital micromirror devices.

Keywords: few-mode optical fibers, neuro-inspired photonic computing, spatio-temporal coincidence detector.

Acknowledgements: The authors acknowledge the support of the European Union's Horizon 2020 research and innovation programme under grant agreement No. 899265 (ADOPD). They also acknowledge the support of the Spanish State Research Agency, through the Severo Ochoa and María de Maeztu Program for Centers and Units of Excellence in R&D (MDM-2017-0711, MCIN/AEI/10.13039/501100011033), and the DECAPH and QUARESC projects (PID2019-111537GB-C21, PID2019-109094GB-C21, -C22 / AEI /10.13039/501100011033).

Reference:

[1] S. Ortín, M. C. Soriano, I. Fischer, C. R. Mirasso, and A. Argyris, "Optical dendrites for spatio-temporal computing with few-mode fibers," *Opt. Mater. Express* 12, 1907-1919 (2022).

High-speed Silicon Photonic neuromorphic computing enabled by hardware-aware deep learning methods

Miltiadis Moralis-Pegios^{1,2}, George Mourgias-Alexandris^{1*},
Apostolos Tsakyridis^{1,2}, George Giamougiannis^{1,2}, Angelina Totovic^{1,2},
Nikolaos Passalis^{1,2}, Manos Kirtas^{1,2}, Anastasios Tefas^{1,2} and Nikos Pleros^{1,2}

¹ Department of Informatics, Aristotle University of Thessaloniki, Greece

² Center for Interdisciplinary Research and Innovation, Aristotle University of Thessaloniki, Greece

* now with Microsoft Research, Cambridge UK

mmoralis@csd.auth.gr

Abstract. The relentless growth in complexity and energy requirements of next generation AI workloads, combined with the inevitable stagnation of computing growth solely based on micro-electronic technology advancements, has shifted research interest in non-Von-Neuman architectures and novel technological platforms. In this context, neuromorphic photonics have arisen as a powerful technological candidate [1], capable of harnessing photonics low-power and high bandwidth credentials in neuromorphic hardware implementations. Demarcating, however, from lab-based demonstrations towards powerful Silicon Photonic (SiPho) integrated systems, necessitates advances in the underlying architecture and the deployment of deep learning (DL) training models capable of harnessing photonics' high-speed advantages even in noisy and nonlinear frequency response circuitry.

In this communication, we provide an overview of our progress in high-speed and high-accuracy SiPho coherent neuromorphic layouts, that synergize novel architectures with hardware-aware DL training models [2]. Our approach is built upon the unique properties of a coherent Crossbar layout, that breaks through the inherent modulation bandwidth insertion loss trade-off of previous implementations, allowing for the first time both high-speed data and weight update rates [3]. Through the deployment of two SiPho prototypes, we validate experimentally both the high-speed and high-accuracy advantages of hardware aware DL-models and demonstrate for the first-time GHz-scale input-data and weight imprinting. Accuracy improvements of up to 6% in the MNIST and CIFAR-10 classification tasks at 5 GMAC/sec/axon are reported when noiseaware training is enforced, while a neuromorphic photonic layout reaching 16 GHz update rates in the MNIST classification task is presented. Finally, we project the scalability of our architecture towards a 32×32 layout revealing lower than ~0.09 pJ/MAC at 50 GHz update rates.

Keywords: —neural networks, neuromorphic computing, neuromorphic photonics

Acknowledgements: This work was supported by the EC through H2020 PLASMONIAC (871391).

References:

- [1] B. J. Shastri et al., "Photonics for artificial intelligence and neuromorphic computing," *Nat. Photon.*, vol. 15, no. 2, pp. 102–114, 2021.
- [2] M. Moralis-Pegios et al., "Neuromorphic Silicon Photonics and Hardware-Aware Deep Learning for High-Speed Inference," in *Journal of Lightwave Technology*, vol. 40, no. 10, pp. 3243-3254, 2022.
- [3] A. Tsakyridis et al., "Silicon Photonic Neuromorphic Computing with 16 GHz Input Data and Weight Update Line Rates", *CLEO*, 2022.

Optical Computing with Extreme Learning Machines

Nuno A. Silva, Tiago D. Ferreira, Duarte Silva, Carla Rosa, Ariel Guerreiro

Departamento da Faculdade de Ciências da Universidade do Porto, Rua do Campo Alegre 687, 4169-007 Porto, Portugal
Center for Applied Photonics, INESC TEC, Rua do Campo Alegre 687, 4169-007 Porto, Portugal

nuno.a.silva@inesctec.pt

Abstract. Computing paradigms alternative to von Neumann architecture are now fueling renewed approaches to analogic processing, easing the path towards all-optical computing solutions. In particular, the reservoir computing framework is an emerging concept that greatly simplifies the transference of neuromorphic concepts to hardware implementations, leveraging solely on nonlinear dynamics which allow most physical systems to act as a computing platform.

In this communication, we explore how interferometric concepts can be exploited to perform computing tasks when using phase or modulation encoding techniques of an optical beam. First, we establish a theoretical framework based on the transmission matrix and connect it with extreme learning machines to understand the computing capacity of the systems in terms of regression and classification tasks. We then present experimental results obtained with two distinct setups: an optical system using i) amplitude encoding through a DMD and with a multimode optical fiber as the propagation media, and another with ii) phase encoding using an SLM and a nonlinear crystal as the reservoir layer. The results demonstrate that both systems can perform some classification and regression tasks, with specific advantages that will be discussed in detail. Furthermore, the results are consistent with the theoretical framework derived, which is an important step to support future research towards general-purpose all-optical hardware. To conclude, the findings enclosed have thus potential to drive future research toward novel technological applications, such as dedicated edge computing solutions integrated in optical sensing devices.

Keywords: Optical Computing, Extreme Learning Machine

Acknowledgements: This work is financed by National Funds through the FCT - Fundação para a Ciência e a Tecnologia, I.P. (Portuguese Foundation for Science and Technology) within project UIDB/50014/2020.

References:

- [1] Silva, Nuno Azevedo, Tiago D. Ferreira, and Ariel Guerreiro. "Reservoir computing with solitons." *New Journal of Physics* 23.2 (2021): 023013
- [2] Pierangeli, Davide, Giulia Marcucci, and Claudio Conti. "Photonic extreme learning machine by free-space optical propagation." *Photonics Research* 9.8 (2021): 1446-1454.

Ultrafast ptychography: from tabletop HHG to Free Electron Lasers

Prof. Giulia Fulvia Mancini

Laboratory for Ultrafast X-ray and Electron Microscopy (LUXEM), Physics
Department, University of Pavia, Via Agostino Bassi 6, Pavia, 27100, Pavia, Italy

giuliafulvia.mancini@unipv.it

Abstract. Breakthrough advances in ultrafast imaging have recently been enabled by the availability of bright, coherent, pulsed sources. In this talk, I will present a novel ultrafast microscopy approach to functional imaging, with resolution on Ångstrom-to-nanometer length and femtosecond time scales. The novelty of this method relies on combining soft X-ray sources with ptychography [1, 2], a technique for coherent diffractive imaging [3, 4] in which multiple diffraction patterns from overlapping fields of view are processed by iterative algorithms to recover amplitude and phase images of sample and beam, separately. I will provide an overview of recent demonstrations applied to the study of thermal transport [5] and plasmonics in nanostructures.

References:

- [1] A. Maiden and J. Rodenburg, *Ultramicroscopy* 109, 1256–1262 (2009).
- [2] P. Thibault, M. Dierolf, A. Menzel, O. Bunk, C. David, F. Pfeiffer, *Science* 321, 379-382 (2008).
- [3] D. Sayre, Some implications of a theorem due to Shannon. *Acta Crystallogr.* 5, 843–843 (1952)
- [4] J. Fienup, “Reconstruction of an object from the modulus of its Fourier transform,” *Opt. Lett.* 3, 27–29 (1978).
- [5] R. Karl, et al., *Sci. Adv.* 4, 4295 (2018).

Ultra-fast Laser-induced Molecular Dissociations on Plasmonic Nanoparticles Driven by Tailored Optical Fields: Mass Spectrometric Evaluations

César Costa-Vera¹, Wenbin Zhang^{2,3}, Ritika Dagar^{2,3}, Philipp Rosenberger^{2,3}, Ana Sousa-Castillo⁴, Emiliano Cortes⁴, Stefan Maier⁴, Boris Bergues^{2,3}, Matthias F. Kling^{2,3,5,6}

¹ Dept. Física, Escuela Politécnica Nacional, 170925, Quito, Ecuador, ² Department of Physics, Ludwig-Maximilians-Universität Munich, D-85748 Garching, Germany, ³ Max Planck Institute of Quantum Optics, D-85748 Garching, Germany, ⁴ Chair in Hybrid Nanosystems, Nanoinstitute Munich, Königinstrasse 10, Faculty of Physics, Ludwig-Maximilians-Universität Munich, 80539, Munich, Germany, ⁵ SLAC National Accelerator Laboratory, Menlo Park, CA 94025, USA, ⁶ Applied Physics Department, Stanford University, Stanford, CA 94305, USA

cesar.costa@epn.edu.ec

Abstract. Reactions on molecular adsorbates on nanoparticles are key players in nanophotocatalysis, atmospheric, and astrochemistry. They can be induced, enhanced, and controlled by field localization and enhancement on the nanoparticle surface. Being able to control near-field-mediated reactions would help in understanding surface photoactivity on nanosystems. Recently, with reaction nanoscopy, it was demonstrated that ion (proton) momenta from dissociation reactions induced by intense femtosecond pulses exhibit clear, distinguishable signatures for single silica nanospheres and their clusters. Later, with waveform-controlled tailored near fields from one and two-color laser pulses, an all-optical nanoscopic control of surface reaction yields was accomplished. Site-selective proton emission from dissociated adsorbate molecules on SiO₂ nanoparticles was observed as a function of polarization and relative phase of the two-color pulses. The angularly resolved mapping between the surface reaction yields and the measured ion momentum demonstrates effective spatial control of molecular reactions on the surface with nanoscopic resolution. In another study, the role of the solvent in the surface composition of the nanoparticles has been investigated. These evaporate on millisecond time scales upon injection of the nanoparticles into the vacuum. The mass spectrometric study indicated that the generated ions originate predominantly from covalent bonds with the silica surface rather than from physisorbed solvent molecules. The experimental results have been modelled and reproduced qualitatively by classical trajectory Monte Carlo simulations. This work paves the way toward all-optical control of photocatalytic chemical reactions on nanoscale surfaces, including plasmonic particles.

Keywords: reaction nanoscopy, adsorbates dissociation, nanoparticle surfaces, optical emission control

Acknowledgements: The support of the Alexander Humboldt Foundation is appreciated.

References:

- [1] Rupp, P. et al., Nat. Commun. 10, 4655 (2019)
- [2] Rosenberger, P. et al., ACS Photon. 7, 1885–1892 (2020)
- [3] Zhang, W. et al., Optica 9, 551-560 (2022)
- [4] Rosenberger, P. et al., Eur. J. Phys. D 76, 109 (2022)

Hollow square core fiber sensor for physical parameters measurement

Diana Pereira^{1,*}, Jörg Bierlich², Jens Kobelke², Marta S. Ferreira¹

¹i3N & Physics Department, University of Aveiro, Campus de Santiago, 3810-193 Aveiro, Portugal

²Leibniz Institute of Photonic Technology, Albert-Einstein-Straße 9, 07745 Jena, Germany

* dsap@ua.pt

Abstract. The measurement of physical parameters is important in many current applications, since they often rely on these measurands to operate with the due quality and the necessary safety. In this work, a simple and robust optical fiber sensor based on an antiresonant hollow square core fiber (HSCF) is proposed to measure simultaneously temperature, strain, and curvature. The proposed sensor was designed in a transmission configuration where a segment of HSCF, with a 10 mm length, was spliced between two single mode fibers. In this sensor, a cladding modal interference (CMI) and a Mach-Zehnder interference (MZI) are enhanced along with the antiresonance (AR) guidance. All the present mechanisms exhibit different responses towards the physical parameters. For the temperature, sensitivities of 32.8 pm/°C, 18.9 pm/°C, and 15.7 pm/°C were respectively attained for the MZI, AR, and CMI. As for the strain, sensitivities of 0.45 pm/μ ϵ , -0.93 pm/μ ϵ , and -2.72 pm/μ ϵ were acquired for the MZI, AR and CMI respectively. Meanwhile, for the curvature measurements, two regions of analysis were considered. In the first region (0 m⁻¹ – 0.7 m⁻¹) sensitivities of 0.033 nm/m⁻¹, -0.27 nm/m⁻¹, and -2.21 nm/m⁻¹ were achieved, whilst for the second region (0.7 m⁻¹ – 1.5 m⁻¹) sensitivities of 0.067 nm/m⁻¹, -0.63 nm/m⁻¹, and -0.49 nm/m⁻¹ were acquired for the MZI, AR and CMI, respectively.

Keywords: Antiresonance, Interferometers, Curvature, Strain, Temperature

Acknowledgements: This work was financially supported by the project AROMA, funded by FEDER, through CENTRO2020-Programa Operacional Regional do Centro, CENTRO-01-0145-FEDER-031568, and by national funds (OE), PTDC/EEI-EEE/31568/2017, UIDB/50025/2020 & UIDP/50025/2020, through FCT/MCTES. The work of M. S. Ferreira and D. Pereira was supported by the research fellowship CEEC-IND/00777/2018, and BI/UI96/9133/2022, respectively. The work was also funded by the German Federal Ministry of Education and Research (BMBF): “The Innovative Growth Core TOF” (Tailored Optical Fibers, FKZ 03WKCV03E) as well as the bilateral cooperation FCT/DAAD (FLOW, Project ID: 57518590).

Silicon Nitride Interferometers for Optical Sensing with Multi-micron Dimensions

**João Costa^{2,3}, Daniel Almeida^{1,2,3}, Alessandro Fantoni^{2,3}, Paulo Lourenço^{1,2,3},
Manuela Vieira^{1,2,3}**

¹ School of Science and Technology, NOVA University of Lisbon, Caparica, Portugal

² UNINOVA-CTS, Caparica, Portugal

³ ISEL - Instituto Superior de Engenharia de Lisboa, Instituto Politécnico de Lisboa, Lisboa, Portugal

jcosta@deetc.isel.ipl.pt

Abstract. Increasing the size of the smallest features of Photonic Integrated Circuits (PICs) to multi-micron dimensions can be advantageous to avoid expensive and complex lithographic steps in the fabrication process. In applications where the small chip size is not a requirement, the design of devices with large dimensions is potential interesting to avoid the need for e-beam lithography. Another benefit is that making the dimensions larger reduces the effect of lithographic imperfections such as waveguide surface roughness. However the benefits do not come without limitations. Coupling the light in and out of the circuit is more challenging since diffraction gratings are not available when designing for such large dimensions. Circuit curves must have a larger radius of curvature and the existence of multimode propagation conditions can have detrimental impact in the performance of several devices, such as interferometers. In this study we perform simulation of the power transfer between a lensed multimode optical fiber and several multi-micron SiN waveguides, both in the strip and rib waveguide formats. Light coupling efficiency is analyzed as a function of alignment and distance variations using the FDTD and the Beam Propagation methods. We study the fraction of power carried in the fundamental waveguide modes. Moreover we use numerical simulations to study the performance of a Mach-Zehnder interferometer sensitive to refractive index variations in the top layer. Both the interferometer, splitters and combiners are design with multi-micron dimensions.

Acknowledgements: Research supported by FCT - Fundação para a Ciência e Tecnologia, through grant SFRH/BD/07792/2021 and projects PTDC/NAN-OPT/31311/2017, FCT/MCTES: UIDB/00066/2020, and by Instituto Politécnico de Lisboa, through projects IPL/2021/wavesensor_ISEL and IPL/2021/MuMiAS-2D_ISEL.

Fiber Loop Mirror temperature sensor interrogated with different techniques

Antonio Vaz Rodrigues^{1,2}, S. M. O. Tavares³, Orlando Frazão¹

¹ Department of Physics and Astronomy, Faculty of Sciences of the University of Porto, and Center of Applied Photonics INESC TEC, Rua Campo Alegre, s/n, 4169007 Porto, Portugal

² Engineering Physics Department, Faculty of Engineering of the University of Porto, Rua Dr Roberto Frias, s/n, 4200465 Porto, Portugal

³ Center for Mechanical Technology and Automation, Department of Mechanical Engineering, University of Aveiro, Aveiro, Portugal

antonio.v.rodrigues@inesctec.pt

Abstract. In this work two different techniques are used to interrogate a Fiber Loop Mirror temperature sensor. In the first method, for static measurements up to 1Hz, a FiberSensing for Optical Spectrum Analysis like traditional OSAs was used to acquire both the transmission and reflection spectra of the temperature sensor. Using this method, the measured sensitivity for a Hi-Bi fiber FLM sensor with a free spectral range of 8.8 nm is 309 pm/°C. In the second approach, more suitable for dynamic measurements, the fiber loop mirror was cascaded with a Fabry-Perot cavity with variable length. A linear PZT drives a silver mirror that works as one of the interfaces of the FP. The applied triangular signal and optical output are acquired by a photodetector and analysed in an oscilloscope. The shape of the output signal is related to optical vernier effect, and after processing it one can accurately interrogate the temperature sensor. A sensitivity of 147 mV/°C was attained. The two methods may be complementary but under different practical situations one may be more adequate than the other. White Light interferometry interrogation may be interesting of complex sensing networks of fiber optic interferometric sensors.

Keywords: white light interferometry, fiber loop mirror, temperature sensing, Fabry-Perot, signal demodulation

Acknowledgements: This work was financed by FCT - Portuguese national funding agency for science, research, and technology through António V. Rodrigues (SFRH/BD/146285/2019).

Plasmonic and Thermal Properties of Nanostructured Systems Probed with Low-cost Optical Setups

**Cesar Costa-Vera, Isamar Sarabia, Queenny Lopez, Telmo Aguilar,
Camila Costa, Jorge Jara, Elizabeth Samaniego, Victor Santos**

Mass Spectrometry and Optical Spectroscopy Group (MSOS), Lab. de Espectroscopia Óptica, Dept. Física, Escuela Politécnica Nacional, 170925, Quito, Ecuador

cesar.costa@epn.edu.ec

Abstract. The characterization of nanostructured systems can be a complex and demanding task, depending on the target properties of the nanostructures. Optical methods are a natural election as they are rather ubiquitous and of simpler implementation. Also they construction can be efficiency-cost-efficient. The size of the wavelength of the light involved in the measurement is normally critical to accomplish the goals, and can be a limiting factor, because typical nanometric dimensions are much smaller than UV-Vis and NIR wavelengths. Still, absorption, fluorescence or diffuse reflectance can shed light into properties such as plasmonic resonances, related to the material and the size of the nanostructures. Also specular reflective measurements with evanescent wave penetration of thin metal films permit probing nanometric and molecular systems, even in real time. We will discuss several setups implemented in our laboratory on a competitive-cost philosophy, based on easy to acquire and off the shelf elements, complemented with 3D printing and ready-made electronics. First we will introduce a thermal lens setup working on the frequency domain in transmission geometry for the determination of thermal diffusivity of solutions or nanoparticle suspensions. Second, we discuss a complementary instrument based on a Sagnac interferometer and a CMOS camera for imaging to evaluate convective heat transfer in such solutions or suspensions. Thirdly, a simple Surface Plasmon Resonance device in Kretschmann configuration is introduced, which is being used to study molecular detachment (evaporation) from porous nanoparticles in ambient and vacuum conditions. Finally, the application of a homemade multispectral scanner with repurposed and 3D printed parts to evaluate the plasmonic responses of butterflies from three distinct vertical layers in a rainy forest (canopy, overstory, and understory) middle height and in connection with thermogravimetric measurements and SEM images of the underlying micro and nanostructures.

Keywords: Photothermal lens, SPR, Multispectral, plasmonic nanoparticles, interferometry

Acknowledgements: The support of the Alexander Humboldt Foundation is greatly appreciated.

Highly Sensitive Plasmonic Sensors and Biosensors realized via Polymer Waveguides

Nunzio Cennamo and Luigi Zeni

University of Campania Luigi Vanvitelli, Department of Engineering, Via Roma 29,
81031 Aversa, ITALY

nunzio.cennamo@unicampania.it

Abstract. Several developed low-cost, highly sensitive, and simple to realize and to use plasmonic sensor configurations are here presented. In particular, the proposed sensor configurations are based on unconventional platforms that efficiently excite the plasmonic phenomena in gold nanofilms, continuous or nanostructured, such as planar polymer waveguides, polymer optical fibers, and light-diffusing fibers (LDFs). The presented plasmonic sensor chips are monitored using a simple experimental setup based on a white light source and spectrometer. Moreover, the proposed platforms can be combined with chemical and biological receptors in several application fields. In these cases, we can obtain the selectivity for the substances of interest via the use of specific Molecular Recognition Elements (MREs) in contact with the plasmonic sensing surfaces, such as those based on molecularly imprinted polymers (MIPs), antibodies, aptamers, and nanoMIPs [1]. The substances measured with the proposed approach are pollutants, viruses, bacteria, toxic metals, pesticides, or other molecules of interest to detect in aqueous solutions. So, the advantages and disadvantages of each biochemical sensor system are presented in detail. More specifically, plasmonic extrinsic and intrinsic optical fiber sensor types will be reported in terms of plasmonic characteristics and key application fields. For instance, these selective plasmonic optical fiber sensor systems (intrinsic or extrinsic schemes) can be used for “Smart Cities” applications, as in water quality monitoring, through an IoT (Internet of Thing) approach, or, alternatively, they can be used onboard of simple robots, based on an autonomous guide, to follow increasing concentrations of pollutants in rivers or sea to identify the point of interest (the source), etc. Similarly, these plasmonic polymer-based biosensors can be used to realize interesting point-of-care tests for biomedical applications.

Keywords: Plasmonic sensors, Polymer waveguides, Biosensors, Polymer optical fibers, Nano-plasmonic sensors

References:

- [1] Nunzio Cennamo, Maria Pesavento, Luigi Zeni, A review on simple and highly sensitive plastic optical fiber probes for bio-chemical sensing, *Sensors and Actuators B: Chemical*, Volume 331, 2021, 129393, <https://doi.org/10.1016/j.snb.2020.129393>

Improving plasmonic sensing with suspended core fibres and metallic nanostructured inclusions

Diego Nóbrega dos Santos^{1,2}, José Manuel Baptista^{2,4}, José Luís Santos^{3,4},
Ariel Guerreiro^{3,4}

¹ Institute for Plasmas and Nuclear Fusion, Av. Rovisco Pais 1, 1049-001 Lisboa, Portugal

² Faculty of Exact Sciences and Engineering, University of Madeira, Campus da Penteadá 9020-105 Funchal, Portugal

³ Department of Physics and Astronomy, Faculty of Sciences, University of Porto, R. Campo Alegre, 4169-007 Porto, Portugal

⁴ INESC TEC - CAP, R. Campo Alegre, 4169-007 Porto, Portugal

jmb@staff.uma.pt

Abstract. Optical fibres with metallic nanostructured inclusions provide great versatility to tailor enhanced optical fibre sensors based on surface plasmons resonances. Through the control of both the geometry (fibre and inclusions) and the material optical properties of the micro and nanostructured components, it is possible to customize the plasmonic and fibre guided modes to optimize their respective interaction, improving the performance of these sensors [1].

The coupling of the optical modes with plasmonic modes depend essentially on the dispersion curves of the different type of modes and are stronger at wavelengths where these curves intersect. The optical properties of these modes near these intersection points define not only the spectral location and width of the plasmonic resonances, but also how these resonances respond to changes in the refractive index of an external analyte and ultimately, how these structures can be used as optical sensing platforms. From these general principles plasmonic sensors can be optimised. On one hand, metallic nanostructured inclusions, such as metallic films or filaments, at specific positions relatively to the core of the fibre permit to adjust the plasmonic resonances to certain wavelength ranges and create spectral telemetric channels. On the other hand, certain optical fibre geometries can further enhance the sensitivity of the plasmonic sensors to external refractive index changes [2-3].

In this work, we discuss the use of a suspended core fibre harnessing how this geometry facilitates the contact between the external analyte with the core fibre and the metallic nanostructured inclusions, permitting to optimise their optical-plasmonic interactions, resulting in changes in the spectral responses that are substantially more significant than in the conventional optical fibre plasmonic sensing configurations.

Keywords: Optical fibre plasmonic sensors, Refractive index sensor, Suspended core fibres, Metallic nanostructured inclusions.

References:

- [1] New Trends in the Simulation of Nanoplasmonic Optical D-Type Fiber Sensors, A. Guerreiro, D. Santos and J. M. Baptista, *Sensors*, 19, 1772, 1-20, 2019.
- [2] Design and Optimization of an Opened Suspended Core Fiber-Based SPR Sensor with Gold Cylinder Structures, J. Wentan, J. Liu, J. Zhang, G. Wang, M. Huang, *Applied Sciences*, 8(4) 592-600, 2018.
- [3] Evaluation of nanoplasmonic optical fiber sensors based on D-type and suspended core fibers with metallic nanowires, A. Guerreiro, D. Santos and J. M. Baptista, *Photonics*, 6, 100, 1-8, 2019.

Strongly coupled plasmonic systems on optical fiber sensors

Paulo S. S. dos Santos^{1,2}, João Mendes^{1,3,4}, I. Pastoriza-Santos^{5,6},
J. M. M. de Almeida^{1,7} and Luís C. C. Coelho^{1,3}

¹INESC TEC - Institute for Systems and Computer Engineering, Technology and Science, Rua Dr. Alberto Frias, 4200-465, Porto, Portugal

²FEUP, University of Porto, R. Dr. Roberto Frias, 4200-465 Porto, Portugal

³FCUP, University of Porto, Rua do Campo Alegre, 4169-007 Porto, Portugal

⁴CIQUP – Chemistry Research Unit, FCUP, Univ. of Porto, 4169-007 Porto, Portugal.

⁵CINBIO, Univ. de Vigo, Campus Univ. Lagoas, Marcosende, 36310 Vigo, Spain

⁶SERGAS-UVIGO, Galicia Sur Health Research Institute, 36312 Vigo, Spain

⁷Dep. of Physics, Univ. of Trás-os-Montes e Alto Douro, 5001-801 Vila Real, Portugal

* paulo.s.santos@inesctec.pt

Abstract. The recent development of hybrid nanostructures composed of metal nanoparticles (NP) and nanometric metallic films separated by a thin dielectric spacer presented a promising path towards highly performant near infrared (NIR) plasmonic sensing [1]. On such system, the surface charges created on the NPs are anti-symmetrically mirrored onto the thin film, creating a large electromagnetic (EM) field enhancement centred at the dielectric spacer. Thus, overcoming the extremely localized EM field enhancement only around the NPs surface, that hinders its refractive index (RI) sensitivity capabilities. The plasmonic characteristics of such strongly coupled system can be controlled by the NP surface area parallel the film, the NP shape, where sharper features cause band narrowing and both the NP and dielectric spacer complex permittivity. Those parameters can be used to tune the plasmonic band towards NIR with enhanced RI sensitivity [2]. However, illumination conditions are critical, requiring a careful implementation on optical fibres. In this work, it was studied the coupling between Au nanospheres, with diameters of 20, 60 and 90 nm, to a 50 nm Au thin film, with a dielectric spacing controlled by the number of polyelectrolytes layers. The optical platform chosen was a multimode optical fiber and it was found that by changing the NP size from 20 nm to 90 nm a red shift of 500 nm, from 700 to 1200 nm, was achieved along RI sensitivities around 2500 nm/RIU, a 25-fold increment from single Au nanospheres.

Keywords: Optical Fiber Sensors, Surface Plasmon Resonance, Localized Surface Plasmon Resonance

Acknowledgements: This work is financed by National Funds through the Portuguese funding agency, FCT - Fundação para a Ciência e a Tecnologia, within project UIDB/50014/2020, the PhD grant SFRH/BD/146784/2019, the PhD grant SFRH/BD/130674/2017 and the research contract CEECIND/00471/2017.

References:

- [1] N. Charchi *et al.*, “Small mode volume plasmonic film-coupled nanostar resonators,” *Nanoscale Advances*, vol. 2, no. 6, pp. 2397–2403, 2020, doi: 10.1039/d0na00262c.
- [2] N. J. Halas, S. Lal, W. Chang, S. Link, and P. Nordlander, “Plasmons in Strongly Coupled Metallic Nanostructures,” *Chemical Reviews*, vol. 111, pp. 3913–3961, 2011.

Room-Temperature Electroluminescence in RTDs: Towards a Universal Model

E.R. Brown

Wright State University, Dayton OH 45435 USA, Terapico, LLC, Beavercreek OH
45431 USA

elliott.r.brown@gmail.com

Abstract. The first room-temperature electroluminescence in n-type resonant tunneling diodes (RTDs) was reported in 2017-2018 [1,2] in GaAs/Al_{0.6}Ga_{0.4}As double-barrier structures emitting around the GaAs band-edge wavelength of ~870 nm. In the same timeframe, GaN/AlN double barrier structures were found to emit near the GaN band-edge around 363 nm [3]. More recently, In_{0.53}Ga_{0.47}As/AlAs double-barrier structures were found to emit around the InGaAs band-edge wavelength of 1631 nm [4]. For the GaAs/AlGaAs devices, the emission was attributed to hole generation by impact ionization on the collector side, followed by e-h radiative recombination on the collector or possibly emitter sides. For the GaN/AlN devices, the emission was attributed to hole generation by interband (Zener) tunneling on the collector side followed by e-h recombination on the emitter side. For the In_{0.53}Ga_{0.47}As/AlAs devices, a detailed analysis suggested that both generation mechanisms are present, with impact ionization dominant at lower bias voltages, and interband tunneling comparable at the higher voltages [4]. In this paper, we apply the same analysis to the GaAs/AlGaAs and GaN/AlN structures, seeking a universal model of electroluminescence applicable to all types of RTDs and their vastly different material parameters. The overriding goal is to predict how high the internal quantum efficiency (IQE) can possibly be, particularly when RTDs are used in the promising application of unipolar-doped light emitting diodes (LEDs). A value of IQE = 6% has been obtained from InGaAs-RTD experimental results [4], but much higher values are possible.

References:

- [1] "Temperature tuning from direct to inverted bistable electroluminescence in resonant tunneling diodes," F. Hartmann, A. Pfenning, M. Rebello Sousa Dias, F. Langer, S. Höfling, M. Kamp, L. Worschech, L. K. Castelano, G. E. Marques, and V. Lopez-Richard, *J. Appl. Phys.* 122, 154502 (2017).
- [2] "Electroluminescence of-off ratio control of n-i-n GaAs/AlGaAs-based resonant tunneling structures," C. de Oliveira, A. Pfenning, E. D. Guarin, M. D. Teodoro, E. C. dos Santos, V. Lopez-Richard, G. E. Marques, L. Worschech, F. Hartmann, and S. Höfling," *Phys. Rev. B* 98, 075302 (2018).
- [3] "Near-UV Electroluminescence in Unipolar-Doped, Bipolar-Tunneling (UDBT) GaN/AlN Heterostructures," T. A. Growden, W-D. Zhang, E. R. Brown, D. F. Storm, D. J. Meyer, and P. R. Berger, *Nature Light: Science & Applications* 7, 17150 (2018).
- [4] "Electroluminescence in unipolar-doped In_{0.53}Ga_{0.47}As/AlAs resonant-tunneling diodes: A competition between interband tunneling and impact ionization" E.R. Brown, W-D. Zhang, T.A. Growden, P. Fakhimi, and P.R. Berger, *Phys. Rev. Appl.* 16, no. 5 (2021).

Dual-functioning emitter-receiver III-V unipolar and bipolar microLEDs for on-chip neuromorphic photonic circuits

Bejoys Jacob^{(1)*‡}, João Lourenço^{(3)*‡}, Filipe Camarneiro⁽¹⁾, Jérôme Borme⁽²⁾,
Jana B. Nieder⁽¹⁾, José M. L. Figueiredo⁽³⁾, Bruno Romeira^{(1)**}

⁽¹⁾Ultrafast Bio- and Nanophotonics, ⁽²⁾2D Materials and Devices, INL – International Iberian Nanotechnology Laboratory, Av. Mestre José Veiga s/n, 4715-330 Braga, Portugal. ⁽³⁾Centra-Ciências and Departamento de Física, Faculdade de Ciências, Universidade de Lisboa, Campo Grande, 1749-016 Lisboa, Portugal.

*bejoys.jacob@inl.int, †jplourenco@fc.ul.pt, **bruno.romeira@inl.int,
‡equal contribution

Abstract. Since the invention of semiconductor p-i-n LEDs and lasers, these components have been predominantly used as light sources for various applications. LEDs operating in reverse-bias mode can be used as photodetectors [1], and have been previously explored in applications for sensing and visible light communications [2,3]. The possibility of a single light source component to operate simultaneously and efficiently as an emitter and receiver under the same forward-bias conditions remains largely unexplored. Here we introduce two novel and miniaturized two-terminal n-i-n-type and p-i-n-type micropillar LED (μ LED) devices based on III-V GaAs/AlGaAs semiconductor compound material with an embedded AlAs/GaAs/AlAs double barrier quantum well (DBQW) resonant tunneling diode [4], which can emit and detect light under the same forward-bias conditions. We have studied the static and dynamic characteristics of fabricated μ LEDs to demonstrate their potential for receiving and emitting light-modulated signals. These devices operate under low-voltage (<2 V) and current (<1 mA for n-i-n and <5 mA for p-i-n) driving conditions enabling an energy-efficient emitting and detecting integrated unit. Such compact light-receiver component which would be able to emit, sense and process light-modulated signals could pave the way for important application for LIDAR systems, imaging systems, low jitter optical clocks and on-chip neuromorphic photonic elements.

Keywords: III-V semiconductors, microLEDs, photodetectors, on-chip neuromorphic photonic circuits

Acknowledgements: Funding from European Commission (H2020-FET-OPEN No. 828841 “ChipAI”). We acknowledge Dr. Iwan Davies (IQE.plc) for the growth of the epilayer material.

References:

- [1] E. Vannacci, et.al, “Study of the Light Emitting Diode as a photoreceptor: Spectral and electrical characterization as function of temperature and lighting source,” *Opto-Electronics Rev.* 26, 201–209 (2018).
- [2] E. Vannacci, et.al, “Applications of light emitting diodes as sensors of their own emitted light,” *Opto-Electronics Rev.* 27, 355–362(2019).
- [3] R. Filippo, et.al, “LEDs: Sources and Intrinsically Bandwidth-Limited Detectors.,” *Sensors (Basel)* 17,(2017).
- [4] C. Ironside, et.al, “Resonant Tunneling Diode Photonics”, 2053-2571 (Morgan & Claypool Publishers, 2019).

Resonant Tunnelling Diode – Photodetectors for spiking neural networks

João Lourenço^{1*}, Qusay Raghieb Ali Al-Taai², A. Al-Khalidi², Edward Wasige²
and José Figueiredo¹

¹ Centra-Ciências and Departamento de Física, Faculdade de Ciências, Universidade de Lisboa, Portugal.

² High Frequency Electronics Group, James Watt School of Engineering, University of Glasgow, UK

* jplourenco@fc.ul.pt

Abstract. Spike-based neuromorphic devices promise to alleviate the energy greed of the artificial intelligence hardware by using spiking neural networks (SNNs), which employ neuron like units to process information through the timing of the spikes. These neuron-like devices only consume energy when active. Recent works have shown that resonant tunnelling diodes (RTDs) incorporating optoelectronic functionalities such as photodetection and light emission can play a major role on photonic SNNs. RTDs are devices that display an N-shaped current-voltage characteristics capable of providing negative differential conductance (NDC) over a range of the operating voltages. Specifically, RTD photodetectors (RTD-PDs) show promise due to their unique mixture of the structural simplicity while simultaneously providing highly complex non-linear behaviour.

The goal of this work is to present a systematic study of the how the thickness of the RTD-PD light absorption layers (100, 250, 500 nm) and the device size impacts on the performance of InGaAs RTD-PDs, namely on its responsivity and time response when operating in the second (1310 nm) and in the third (1550 nm) optical transmission windows. Our focus is on the overall characterization of the device optoelectronic response including the impact of the light absorption on the device static current-voltage characteristic, the responsivity and the photodetection bandwidth. For the static characterization, the devices I-V curves were measured under dark conditions and under illumination, giving insights on the light induced I-V tunability effect. The RTD-PD responsivity was compared to the response of a commercial photodetector. The characterization of the temporal response included its capacity to generate optical induced neuronal-like electrical spike, that is, when working as an opto-to-electrical spike converter. The experimental data obtained at each characterization phase is being used for the evaluation and refinement of a behavioural model for RTD-PD devices under construction.

Keywords: RTD-PDs, Optoelectronics, Photodetectors

Acknowledgements: EC Grant No. 828841 659 ChipAI-H2020-FETOPEN-2018–2020, FCT Grant PD/BD/142830/2018, JWNC nanofabrication centre (UGLA).

References:

- [1] M. Hejda et al., “Resonant Tunneling Diode Nano-Optoelectronic Excitable Nodes for Neuromorphic Spike-Based Information Processing,” *Phys. Rev. Appl.*, vol. 17, no. 2, p. 024072, Feb. 2022
- [2] B. Romeira et al., “Subwavelength neuromorphic nanophotonic integrated circuits for spike-based computing: challenges and prospects,” in *Emerging Topics in Artificial Intelligence (ETAi)* 2021.

Towards spiking laser diodes on a III-V/Si nanophotonic platform for neuromorphic applications

E. D. Malysheva¹, J. Figueiredo³, I. Davies⁴, A. Fiore², K. A. Williams¹,
V. Dolores-Calzadilla^{1,2}

¹ Eindhoven Hendrik Casimir Institute, Eindhoven University of Technology, P.O. Box 513,5600 MB Eindhoven, Netherlands

² Photonic Integration Technology Center, Groene Loper 19, 5612 AP Eindhoven, Netherlands

³ Faculdade de Ciências da Universidade de Lisboa, Campo Grande, Edifício C8, Lisboa, Portugal

⁴ IQE plc, Pascal Close, Cardiff CF3 0EG, UK

e.malysheva@tue.nl

Abstract. The monolithic integration of resonant tunnelling diodes with metal-cladding cavity nanolasers opens up the opportunity for dense integration of low-power spiking optical devices. Moving towards nanoscale neuromorphic functionality raises design and fabrication challenges. Fabrication non-idealities play a crucial role in nanophotonic devices performance, for example: high series resistance and unoptimized surface passivation of nanopillar devices may lead to excessive Joule heating and early thermal roll-off (i.e. before reaching lasing threshold). Furthermore, to allow for high-speed spiking operation, design flexibility to adjust the electrical characteristics of devices is desirable. The InP-Membranes on Silicon (IMOS) platform provides the possibility for double-side processing, thereby allowing a significant design freedom. In this work, we discuss our progress towards nanoscale spiking lasers integrated on the IMOS platform.

Keywords: nanophotonic, nanolaser, neuromorphic computing

Acknowledgements: This project has received funding support from the European Union's Horizon 2020 research and innovation program under Grant No. 828841. The authors would like to acknowledge Stuart Edwards for facilitating the supply of semiconductor wafers, and Daniele Pellegrino for contributing to device simulations.

Optical nanoantennas: from sensing to killing cancer

Pablo Albella*

* Department of Applied Physics, University of Cantabria (Spain)

albellap@unican.es

Abstract. Nowadays, optical biosensing and photothermal (PTT) cancer treatments are currently highly active research topics. In the case of biosensing, there is an increasing demand of high sensitivity-enhanced, strong selective and low-cost devices [1]. And in PTT, its success strongly depends on the heating source i.e., the optically absorbing agent employed [2].

Metallic or high-refractive index dielectric nanostructures that show resonances when excited with light can act as optical nanoantennas, providing a versatile tool to control light beyond the conventional diffraction limit [3]. Depending on the type of nanoantennas, they can be appropriate for different applications such as ultrasensitive (bio-) sensing, surface enhanced spectroscopies or photothermal application.

In this talk, I will present the most recent contributions we have made in this topic. In the first part, I will pay special attention to novel designs of highly sensitive optical biosensors based on surface plasmons and optical chirality [4,5]. The second part will be devoted to new nanoheating prototypes able to enhance and deliver heat in a control manner [6-8].

Acknowledgements: Authors would like to thank Prof C. R. Crick for the interesting and valuable discussions. We gratefully acknowledge financial support from Spanish national project INMUNOTERMO (No. PGC2018-096649-B-I), the UK Leverhulme Turst (Grant No. RPG-2018-384). J. G-C. thanks the Ministry of science of Spain for his FPI grant and P.A. acknowledges funding for a Ramon y Cajal Fellowship (Grant No. RYC-2016-20831).

References:

- [1] P. S. S. dos Santos, José M. M. de Almeida, I. Pastoriza-Santos and L. C. C. Coelho. Advances in Plasmonic Sensing at the NIR—A Review. *Sensors* 2021, 21, 2111.
- [2] André M. Gobin, Min Ho Lee, Naomi J. Halas, William D. James, Rebekah A. Drezek, and Jennifer L. West. *Nano Letters* 7 (7), 1929-1934, 2007.
- [3] Stefan A. Maier, *Plasmonics: Fundamentals and Applications*. Springer, 2007.
- [4] J. González-Colsa, G. Serrera, J. M. Saiz, F. González, F. Moreno and P. Albella. *Opt. Express* 29, 13733 (2021)
- [5] G. Serrera, J. González-Colsa, V. Giannini, J. M. Saiz and P. Albella. *J. Quant. Spec. Rad. Transf.* 284, 108166, 2022.
- [6] J. González-Colsa, G. Serrera, J. M. Saiz, D. Ortiz, F. Gonzalez, F. Brersme, F. Moreno and P. Albella. *Opt. Express* 30, 125–137 (2021).
- [7] J. González-Colsa, J. D. Olarte Plata, F. Bresme and P. Albella. Enhanced Thermo-Optical Response by Means of Anapole Excitation, (preprint) arXiv:2203.13723v1, 2022
- [8] J. González-colsa, A. Franco Pérez, F. Bresme, F. Moreno and P. Albella. arXiv:2110.11932, v1, 2021.

Au nanoparticles/semi-conductor thin film prepared by laser annealing and sol-gel

**Ching-Fu Lin^{1,2,3,4}, Amine Khitous,^{1,2} Laurent Noel,^{1,2} Hsiao-Wen Zan^{3,4},
Olivier Soppera^{1,2}**

¹ Université de Haute-Alsace, CNRS, IS2M UMR 7361, F-68100 Mulhouse, France ;

² Université de Strasbourg, France;

³ Department of Photonics and Institute of Electro-Optical Engineering, College of Electrical and Computer Engineering, National Yang Ming Chiao Tung University, Hsinchu, 300, Taiwan, ROC;

⁴ Department of Photonics and Institute of Electro-Optical Engineering, College of Electrical and Computer Engineering, National Chiao Tung University, Hsinchu, 300, Taiwan, ROC.

olivier.soppera@uha.fr

Abstract. The development of alternative methods of integrating electronic devices has become a major issue in the context of the Internet of Things (IoT). Among these basic components, photodetectors are important devices for applications in health, sports or more generally sensors.

We propose a new method for preparing gold nanoparticles (Au NPs)/indium-zinc-oxide (IZO) nanocomposite thin films based on photothermal mechanisms with near-Infrared (NIR) laser-annealing, which allows integrating the nanomaterial on fragile substrates such as thin glass, plastic sheets, or 3D printed pieces. The Au NPs were first prepared by NIR laser dewetting of a thin Au layer. Then, the Au NPs were used to locally cure the semiconductor material and provide suitable electronic properties owing to their efficient thermoplasmonic effects under our NIR laser annealing conditions. Finally, the electronic properties of the Au NPs/IZO thin films were characterized in the dark and under light excitation. Good photoresponsivity at 410 nm (UV, $> 10^0$ A/W) was demonstrated, but interestingly, the presence of Au NPs significantly improved the detection ability to a longer wavelength range, such as to 515 nm (green, $\sim 5 \times 10^{-3}$ A/W), even extending to 630 nm (red, $\sim 5 \times 10^{-4}$ A/W), and 780 nm (NIR, $\sim 10^{-4}$ A/W). In addition, with the critical evaluation of dynamic light detection and lifetime trace (> 22 days), the laser-annealed Au NPs/IZO photodetector (PD) demonstrated useful operating reliability and stability.

References:

[1] C. C. Yeh, H. W. Zan, O. Soppera, *Advanced Materials* 2018, 30, 24.

[2] C.-F. Lin, A. Khitous, H.-W. Zan, O. Soppera, *Advanced Optical Materials* 2021, 2100045.

Plasmonic/magnetic liposomes based on nanoparticles with multicore-shell architecture for chemo/thermotherapy

Ana Rita O. Rodrigues, Fábio A. C. Lopes, André V. F. Fernandes,
Elisabete M. S. Castanheira and Paulo J. G. Coutinho

Physics Centre of Minho and Porto Universities (CF-UM-UP) and LaPMET Associate
Laboratory, University of Minho, Campus of Gualtar, 4710-057 Braga, Portugal

ritarodrigues@fisica.uminho.pt

Abstract. Multifunctional liposomes containing magnetic and plasmonic nanoparticles (magnetic/plasmonic liposomes) are promising nanosystems for cancer therapy. Their structural and physical properties enable a synergistic effect between dual hyperthermia (magneto-photothermia) and local chemotherapy, allowing overheating of cancer cells while increasing drug toxicity [1,2].

In this work, multicore magnetic nanoparticles (NPs) of manganese ferrite were prepared using carboxymethyl-dextran and melamine as agglutinating agents. The NPs prepared exhibit a flower-shape structure and good capabilities for magnetic hyperthermia. Magnetoliposome-like structures containing the multicore NPs exhibit sizes in the range 250 – 400 nm, being suitable for biomedical applications. A new antitumor thienopyridine derivative was loaded in these nanocarriers with a high encapsulation efficiency. The stability of the nanosystem was confirmed, pointing to suitable characteristics of the magnetoliposomes for dual cancer therapy (combined hyperthermia and chemotherapy).

Keywords: magnetic nanoparticles, plasmonic nanoparticles, multicore-shell nanostructures, magnetic hyperthermia, combination therapy

Acknowledgements: FCT under Strategic funding of CF-UM-UP (UIDB/04650/2020).

References:

- [1] Rodrigues, A.R.O., Matos, J.O.G., Dias, A.M., Almeida, B.G., Pires, A., Pereira, A.M., Araújo, J.P., Queiroz, M.-J.R.P., Castanheira, E.M.S., Coutinho, P.J.G. (2019). Development of Multifunctional Liposomes Containing Magnetic/Plasmonic $\text{MnFe}_2\text{O}_4/\text{Au}$ Core/Shell Nanoparticles. *Pharmaceutics* 11(1), 10. DOI: 10.3390/pharmaceutics11010010
- [2] Rio, I.R.S., Rodrigues, A.R.R., Rodrigues, J.M., Queiroz, M.J.R.P., Calheta, R.C., Ferreira, I.C.F.R., Almeida, B.G., Pires, A., Pereira, A.M., Araújo, J.P., Castanheira, E.M.S., Coutinho, P.J.G. (2021). Magnetoliposomes Based on Magnetic/Plasmonic Nanoparticles Loaded with Tricyclic Lactones for Combined Cancer Therapy. *Pharmaceutics* 13(11), 1905. DOI: 10.3390/pharmaceutics13111905


Gas detection with high-resolution LSPR spectroscopy

Manuela Proença*, Marco S. Rodrigues, Joel Borges, Filipe Vaz

Physics Center of Minho and Porto Universities (CF-UM-UP), University of Minho,
Campus de Azurém, 4800-058 Guimarães, Portugal

manuelaproenca12@gmail.com

Abstract. Gas sensing, based on bulk refractive index (RI) changes, has been a challenging task for localized surface plasmon resonance (LSPR) spectroscopy. In this work, it is demonstrated that a plasmonic thin film composed of Au nanoparticles embedded in a CuO matrix can be used to detect small changes (as low as 6×10^{-5} RIU) in bulk RI of gases at room temperature, using a High-Resolution LSPR spectroscopy system [1,2]. Such a thin film system was optimized by reactive magnetron sputtering, followed by an in-air annealing protocol treatment at 700 °C to promote the Au nanoparticles' growth. To enhance the film's sensitivity, the effect of low power plasma etching was investigated on the surface properties and nanostructure of the thin film. A 5 min Ar plasma treatment was revealed to be enough to remove the top monolayers of the film and partially expose the embedded nanoparticles, thus maximizing the sensor sensitivity. The treated sample exhibit high sensitivity to inert gases (Ar, N₂), presenting a refractive index sensitivity to bulk RI changes of 850 nm/RIU. Furthermore, a 2-fold signal increase was observed for O₂ and CO gases, showing that the thin film system is clearly more sensitive to these non-inert gases, due to, most probably, gas adsorption on the film surface. The results show that the Au:CuO thin film system is capable to detect small RI changes caused by different gases, at room temperature, supporting the potential of this thin film system to be employed as a gas sensor, particularly in CO detection.

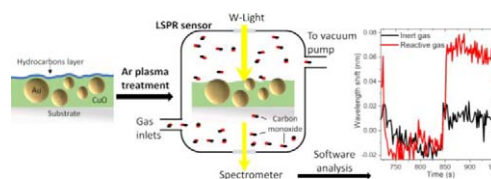

Keywords: Plasmonic thin film; Au nanoparticles; High-Resolution LSPR spectroscopy; optical gas sensing.

Acknowledgements: This work was funded by the Portuguese Foundation for Science and Technology (FCT) in the framework of the Strategic Funding UIDB/04650/2020, and by the project CO2Plasmon: EXPL/CTM-REF/0750/2021. M. Proença acknowledges FCT for PhD scholarship: SFRH/BD/137076/2018.

References:

- [1] M. Proença, M.S. Rodrigues, J. Borges, F. Vaz, Optimization of Au:CuO Nanocomposite Thin Films for Gas Sensing with High-Resolution Localized Surface Plasmon Resonance Spectroscopy., *Anal. Chem.* 92 (2020) 4349–4356.
- [2] M. Proença, M. Rodrigues, F. Vaz, J. Borges, Carbon Monoxide (CO) Sensor Based on Au Nanoparticles Embedded in a CuO Matrix by HR-LSPR Spectroscopy at Room Temperature, *IEEE Sensors Lett.* 5 (2021).

Photonic Crystal Design for Bloch Surface Wave Sensing

Bernardo Dias^{1,2}, José M. M. de Almeida^{1,3}, Luís C. C. Coelho^{1,2}

¹INESC TEC–Institute for Systems and Computer Engineering, Technology and Science, Faculty of Sciences, University of Porto, 4169-007 Porto, Portugal

²Department of Physics and Astronomy, Faculty of Sciences, University of Porto, 4169-007 Porto, Portugal

³Department of Physics, School of Science and Technology, University of Trás-os-Montes e Alto Douro, 5001-801 Vila Real, Portugal

bernardo.s.dias@inesctec.pt

Abstract. In the past few years, Bloch Surface Waves (BSW) have emerged as an alternative to Surface Plasmon Polariton (SPP) based sensing, which has been the predominant surface wave used in different types of optical sensors [1]. While SPP's are excited at the interface of a metal and a dielectric, BSW's are excited at the interface between a photonic crystal and a dielectric, thus displaying sharper resonances and better durability [2]. Nevertheless, due to the large number of parameters such as refractive indices, thicknesses and number of layers, the design of photonic crystals for the optimization of BSW-based sensors is not a trivial task, and several works have already approached this topic using different optimization techniques [3,4].

In this work, a strategy for designing 1D photonic crystals for BSW based sensing is presented, which builds upon previously published work. The goal is to establish a correlation between the parameters of a photonic crystal and the spectral characteristics of the BSW, which may provide important insights for future design of optical sensors.

Keywords: Bloch Surface Waves; Photonic Crystals; Optical Sensors; Nanophotonics

Acknowledgements: This work is financed by National Funds through the Portuguese funding agency, FCT - Fundação para a Ciência e a Tecnologia, within project UIDB/50014/2020 and the research contract CEECIND/00471/2017.

References:

- [1] A. Sinibaldi, N. Danz, E. Descrovi, P. Munzert, U. Schulz, F. Sonntag, L. Dominici, F. Michelotti, "Direct comparison of the performance of Bloch surface wave and surface plasmon polariton sensors", *Sens. Actuators B Chem.*, 174, 292-298 (2012).
- [2] M. Gryga, D. Ciprian, L. Gembalova, and P. Hlubina, "Sensing based on Bloch surface wave and self-referenced guided mode resonances employing a one-dimensional photonic crystal," *Opt. Express* 29, 12996-13010 (2021)
- [3] I. Degli-Eredi, J. E. Sipe, and N. Vermeulen, "Power-flow-based design strategy for Bloch surface wave biosensors," *Opt. Lett.* 43, 1095-1098 (2018)
- [4] Ji Ma, Xiu-Bao Kang, and Zhi-Guo Wang, "Sensing performance optimization of the Bloch surface wave biosensor based on the Bloch impedance-matching method," *Opt. Lett.* 43, 5375-5378 (2018)

Advanced refractive index sensor using 3-dimensional metamaterial based nano antenna array

Sneha Verma and B.M.A Rahman

School of Mathematics, Computer Science and Engineering, City University of London, London, United Kingdom

sneha.verma@city.ac.uk and b.m.a.rahman@city.ac.uk

Abstract. Photonic researchers have increasingly exploiting nanotechnology. Due to the advent of numerous prevalent nanosized manufacturing methods that enable adequate shaped nanostructures to be manufactured and investigated as a method of exploiting nano-structured. Owing of the variety of optical modes, hybrid nanostructures that integrate dielectric resonators with plasmonic nanostructures also offer enormous potentials. In this work, we have explored a hybrid coupled nano-structured antenna with stacked lithium tantalate(LiTaO₃)/Aluminium oxide(Al₂O₃) multilayer operating at infrared ranging from 400nm– 2000nm. Here, the sensitivity response has been explored of the hybrid nano-structured array made up of the gold metal elliptical disk placed on the top of a quartz substrate and excite the different modes in both materials. It shows large electromagnetic confinement at the separation distance(d) of the dimers due to strong surface plasmon resonance(*SPR*). The influence of the structural dimensions is investigated to optimise the sensitivity of stacked elliptical dimers. The designed hybrid coupled nano-structure with the combination of gold(*Au*) and Lithium tantalate(LiTaO₃)/Aluminium oxide(Al₂O₃) with $h_1=h_2=10$ nm each 10 layer exhibits bulk sensitivity(S), which is the spectrum shift unit per refractive index(RI) change in the surrounding medium was calculated to be 700 and 620nm/RIU with major axis, (a) = 100 nm, minor axis, (b) = 10nm, separation distance(d) = 10nm, height, (h) = 100nm. The outcomes from the proposed hybrid nano-structure has been compared with a single metallic(only gold) elliptical paired nano-structure to show a significant improvement in the sensitivity using hybrid nano-structure. Depending on these findings, we demonstrated a roughly two-fold increase in sensitivity(S) by utilising a hybrid nano linked nano-structure with respect to identical nano structure, which competes with traditional sensors with the same height, (h) based on localised surface plasmon resonances. Our innovative plasmonic hybrid nanostructures provide a framework for developing plasmonic nanostructures for use in various sensing applications.

Keywords: Nano-antenna, Surface plasmon resonance, plasmonic sensitivity, plasmons, refractive index sensing, and Localized surface plasmon resonance.

Acknowledgements: The authors wish to express their gratitude to City, University of London. City, University of London Doctoral Fellowship programme supported to this extensive research. S.V. would also want to acknowledge the Worshipful Company of Scientific Instrument Makers for offering partial financing for this scientific study.

Humidity and touch sensing by capacitive-type sensors obtained by electrochemical anodization

**J. O. Carneiro^{a,*}, Artur Ribeiro^b, F. Miranda^a, I. Rocha Segundo^{a,c}, S. Landi Jr.^d,
V. Teixeira^a, Manuel F. M. Costa^{a,#}**

^a Centre of Physics, University of Minho, Portugal

^b Centre of Biological Engineering, University of Minho, Portugal

^c Civil Engineering Department, University of Minho, Portugal

^d Federal Institute Goiano, Rio Verde, GO, Brazil

* carneiro@fisica.uminho.pt (J. O. Carneiro),

mfcosta@fisica.uminho.pt (Manuel F. M. Costa)

Abstract. Capacitive-type sensor created from nanoporous anodic aluminium oxide (NP-AAO) were prepared by the one-step anodization method conducted in potentiostatic mode. A low-cost preparation system was set. A series of samples were prepared via an anodization campaign carried out on different acid electrolytes, in which the anodization parameters were adjusted to investigate the effect of pore size and porosity on the capacitive sensing performance. Two sensor test cases are investigated: highly uniform NP-AAO structures for humidity sensing applications; and, the use of NP-AAO as a capacitive touch sensor for biological applications, namely to detect the presence of small “objects” such as bacterial colonies of *Escherichia coli*.

25G Receiver and Analysis of Filters Frequency Response

A. E. Abejide, S. Pandey, Kota M. R, P. Duarte, I. Alimi, M. Lima & A. Teixeira

Instituto de Telecomunicações-IT, Universidade de Aveiro, Portugalb

adebayo@ua.pt

Abstract. Cost-efficient transmission is an important objective of access networks. One approach to achieve this in 25 Gb/s high-speed passive optical networks (HSP) could be using 10G opto-electronic receiver (Rx). To do this, bandwidth (BW) limitation would cause major degradation and high error rate. In [1], a 10G-Rx with an adaptive equalizer is suggested which introduces extra cost. According to the standard [1], 75% of the signal's bandwidth is required for an efficient Rx design capable of smooth signal reception. This indicates that 3 dB-BW of 18.75 GHz would be required for 25 Gb/s transmissions.

In this work, analysis of four electrical low-pass filters (LPF) for the Rx design are carried out. These are Bessel (Be), Gaussian (Ga), Trapezoid (Tr) and Butterworth (Bu) LPF. For Be, Ga and Bu, optimal performances are obtained when the filter order is set to 4 and 3 dB-BW is set between 13 GHz and 19 GHz. For Tr, BER vs BW at different stop band attenuation (SBA) was obtained as shown in Fig.1(a) with optimal performance at SBA = 30 dB and 9 GHz 3 dB-BW. Throughout the simulation, Tr stop BW (sBW) is set to 2*Bitrate (50 GHz).

We generate a 25 Gb/s signal from a Hybrid Modulation transmitter (HM_t) following the procedure in [2]. The modulated signal is transmitted over 20 km of SMF and decoded by a PIN-PD followed by a LPF and an error analyser. The four filters are configured with 3 dB-BW of 7.5 GHz and 18.75 GHz BW mimicking 10G and 25G Rx respectively.

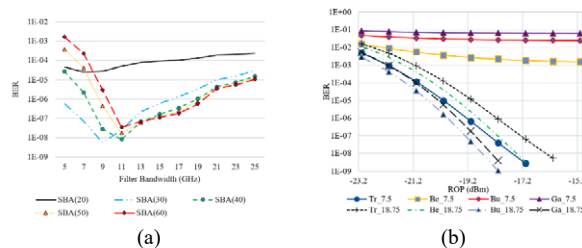


Fig. 1 (a) BER versus Tr BW at different SBA. (b) BER versus ROP for 20 km transmission of 25 Gb/s signal using different filter types (Be, Ga, Tr, Bu) with BW set to 7.5 GHz and 18.75 GHz.

The result of BER against ROP shown in Fig.1 (b) indicates the possibility of using 10G-Rx with Tr to decode 25 Gb/s signal. Whereas, this is challenging with other filters specified. The result pointed to the direction of designing low-cost 10/25G Rx for future 25/50 Gb/s access networks.

Acknowledgements: This work is supported by the European Regional Development Fund (FEDER), through the Competitiveness and Internationalization Operational Program (COMPETE 2020) of the Portugal 2020 framework [Project plugPON with Nr. 047221 (POCI-01-0247-FEDER-047221)]

References:

- [1.] International Telecommunication Union ITU-T. PON transmission technologies above 10 Gbit/s per wavelength. <https://www.itu.int/rec/SeriesGSupplement64>, 2018.
- [2] Abejide, A.E.; Pandey, S.; Kota, M.R.; Aboderin, O.; Lima, M.J.; Teixeira, A. Hybrid Modulation Approach for Next Generation Optical Access Networks. CSNDSP 2020, pp. 1–6.

Brain-inspired nanophotonic spike computing

Bejays Jacob, Jana B. Nieder, Bruno Romeira*

INL – International Iberian Nanotechnology Laboratory, Ultrafast Bio- and Nanophotonics Group, Av. Mestre José Veiga s/n, 4715-330 Braga

* bruno.romeira@inl.int

Abstract. Today's most successful artificial intelligence (AI) algorithms are inspired by brain-like neural networks. However, unlike our highly efficient brains, running these algorithms on computers consumes very large amounts of energy. These extremely inefficient central processing units hinder the development of efficient, scalable and portable AI systems.

Spiking photonic neural networks based on subwavelength excitable neuron-like devices are of paramount importance since they could enable the inherent parallelism and energy efficiency needed for brain-inspired AI systems. Despite the significant advances in neuromorphic photonics, compact and efficient nanophotonic elements for emission (and detection) of spiking signals, as required for spike-based computation, remains largely unexplored. Among numerous challenges, difficulties in achieving neuron-like non-linear properties, large non-radiative recombination rates leading to low-efficient sources, and challenges in light extraction and coupling to waveguides [1], all play a relevant role to realize on-chip brain-inspired nanophotonic hardware.

Here, we outline the main challenges, early achievements, and opportunities towards key-enabling photonic neuro-architectures using spiking nodes. Then, we present a platform based on resonant tunnelling diodes (RTDs) integrated with nanoscale light-emitting diodes (nanoLEDs) [2]. We utilize this nanophotonic hardware as the non-linear artificial optical neurons capable of producing non-linear spikes to realize neuron emitter and receiver spiking nodes. Such layout would exhibit small footprint and low-power consumption, all key requirements for efficient optoelectronic spike conversion. The future progresses towards the development of such a neuro-architecture integrated with optical interconnections, and configured with appropriate spike-based algorithms will pave the way for further progresses.

Keywords: Nanophotonics, nanoLEDs, neuromorphic computing, optical interconnects, spiking neural networks

Acknowledgements: European Commission, H2020-FET-OPEN Project “ChipAI” under Grant Agreement 828841.

References:

- [1] B. Romeira, J. Borme, H. Fonseca, J. Gaspar, and J. B. Nieder, “Efficient light extraction in subwavelength GaAs/AlGaAs nanopillars for nanoscale light-emitting devices,” *Optics Express*, vol. 28, no. 22, pp. 32302-32315, 2020.
- [2] B. Romeira, J. M. L. Figueiredo, and J. Javaloyes, “NanoLEDs for energy-efficient and gigahertz-speed spike-based sub- λ neuromorphic nanophotonic computing,” *Nanophotonics*, vol. 9, no. 13, pp. 4149-4162, 2020.

Two-photon polymerization simulation and fabrication of 3D microprinted suspended waveguides for on-chip optical interconnects

Artur Andrishak, Tiago L. Alves, Ricardo M. R. Adão, Christian Maibohm,
Bruno Romeira, and Jana B. Nieder

INL-International Iberian Nanotechnology Laboratory, Ultrafast Bio- and
Nanophotonics Group, Av. Mestre Veiga, s.n., 4715-330 Braga, Portugal.

*jana.nieder@inl.int, *artur.andrishak@inl.int, *tiago.alves@inl.int.

Abstract. Quantum and neuromorphic computational platforms based on integrated photonic circuits require next-generation optical functionalities and increasingly complex on-chip light-routing capabilities enabling, for instance, high interconnectivity and superpositions which are paramount for the realization of artificial neural networks. In such integrated photonic circuits, the single optical interconnect would be individually designed and optimized; for complex networks, two-photon polymerization (TPP)-based microprinting allows for expanding the waveguides into 3D which is not achievable by standard planar lithography fabrication technologies. Here we present a 3D morphology prediction tool which considers experimental TPP parameters enabling on-chip 3D waveguide performance simulations that allow estimation of transmission and in-coupling losses based on the waveguide design and material prior to fabrication reducing the cost-intensive and time-consuming systematic experimental optimization process. Fabricated 3D waveguides based on simulated designs show optical transmission properties in agreement with simulation results, demonstrating the benefits of the developed morphology prediction methodology for the development of versatile on-chip and potentially inter-chip photonic interconnect technology. Furthermore, several waveguide design strategies to circumvent fabrication limitations and improve optical properties are presented.

Keywords: polymeric waveguides, 3D printing, two-photon polymerization (TPP), neuromorphic computation, photonic wire-bonding.

Acknowledgements: We thank Beatriz Costa for testing the developed simulation and microfabrication techniques, and Filipe Camameiro for support on Python device control implementation. This work benefitted from the access to and support by the Nanophotonics and Bioimaging, the Nanofabrication and the AEMIS Research Core facilities of INL. RA acknowledges the Laser Photonics & Vision Ph.D. program, U. Vigo. This research is funded by the European Commission (H2020-FET-OPEN No. 828841 “ChipAI”); ERDF INTERREG V-A España Portugal (POCTEP) (2014–2020 0181_NANOEATERS_1_EP).

References:

- [1] R. M. R. Adão, T. L. Alves, C. Maibohm, B. Romeira, and J. B. Nieder, “Two-photon polymerization simulation and fabrication of 3D microprinted suspended waveguides for on-chip optical interconnects,” *Optics Express*, vol. 30, no. 6, p. 9623, 2022, doi: 10.1364/oe.449641.
- [2] J. Moughames, X. Porte, L. Larger, M. Jacquot, M. Kadic, and D. Brunner, “3D printed multimode-splitters for photonic interconnects,” *Optical Materials Express*, vol. 10, no. 11, p. 2952, 2020, doi: 10.1364/ome.402974.
- [3] H. Gao, G. F. R. Chen, P. Xing, J. W. Choi, H. Y. Low, and D. T. H. Tan, “High-Resolution 3D Printed Photonic Waveguide Devices,” *Advanced Optical Materials*, vol. 8, no. 18, pp. 1–8, 2020, doi: 10.1002/adom.202000613.
- [4] J. Moughames *et al.*, “Three-dimensional waveguide interconnects for scalable integration of photonic neural networks,” *Optica*, vol. 7, no. 6, p. 640, 2020, doi: 10.1364/optica.388205.

Subwavelength structures for taper waveguides

Paulo Lourenço^{a,b,*}, Alessandro Fantoni^{a,b}, João Costa^{a,b}, Manuela Vieira^{a,b,c}

^a DEETC-ISEL-Instituto Politécnico de Lisboa, 1959-007, Lisboa, Portugal

^b CTS-UNINOVA, 2829-516, Caparica, Portugal

^c DEE-FCT-UNL, Faculdade de Ciências e Tecnologia, 2829-516, Caparica, Portugal

* pj.lourenco@campus.fct.unl.pt

Abstract. In Photonic Integrated Circuits (PICs) it is often necessary some sort of mismatch adaptation between waveguides of different cross-sections. There are several instances of such a designing constraint, being the vertical coupling between the PIC and an optical fibre probably the most representative of all examples. Here, the beam of electromagnetic energy inside the PIC must be inserted/extracted through/to an optical fibre. Typical core diameters are approximately 10 μm and 5 μm , for single mode optical fibres operating in the near infrared and visible wavelengths, respectively. On the other hand, the optical interconnects linking individual structures in PICs are usually single mode waveguides, 400 to 500 nm wide and a few hundreds of nanometres thick. This presents a bidimensional mismatch between the optical fibre and the single mode waveguide within the PIC, that requires both lateral and longitudinal beam expansions. In this work, we have approached the lateral expansion of the fundamental mode propagating in a single mode waveguide, at the operating wavelength of 1550 nm and being coupled out into an optical fibre, through a grating structure 14.27 μm wide. To this end, we have designed and simulated a subwavelength metamaterial planar structure, which is able to expand laterally the fundamental mode's profile from 450 nm to 14.27 μm (typical width of the grating coupler), within 11.1 μm . Furthermore, we will be presenting the results obtained when comparing this structure with several linear inverted taper waveguides, regarding coupling and propagation efficiencies. Namely, we compared the coupling efficiencies of the modes propagating in an 100 μm long waveguide, when being excited by the analytically calculated fundamental mode and the fields obtained at the end of the designed structure. The results obtained for the designed structure 11.1 μm long and the calculated fundamental mode showed a coupling efficiency of -1.53 dB and -1.20 dB, respectively.

Keywords: subwavelength structures, metamaterial, planar waveguide, linear taper waveguide.

Acknowledgements: This research has been supported by EU funds through the FEDER European Regional Development Fund project LISBOA-01-0145-FEDER-031311 FCT – Fundação para a Ciência e Tecnologia projects PTDC/NAN-OPT/31311/2017 and UIDB/00066/2020 and by Portuguese national funds by FCT – Fundação para a Ciência e a Tecnologia through grant SFRH/BD/144833/2019, and by projects IPL/2021/MuMIAS-2D/ISEL and IPL/2021/wavesensor_ISEL.

MMI Splitters and Combiners for Multi-Micron Amorphous Silicon Nitride Rib Waveguides

**Daniel Almeida^{1,2,3}, João Costa^{2,3}, Alessandro Fantoni^{2,3}, Paulo Lourenço^{1,2,3},
Manuela Vieira^{1,2,3}**

¹ School of Science and Technology, NOVA University of Lisbon, Caparica, Portugal

² UNINOVA-CTS, Caparica, Portugal

³ ISEL - Instituto Superior de Engenharia de Lisboa, Instituto Politécnico de Lisboa, Lisboa, Portugal

daniel.almeida@isel.pt

Abstract. Light distribution devices are vital elements found in almost every photonic integrated circuit. Interferometric sensors, such as, for example the Mach-Zehnder and Young configurations rely on light beam division and combination. In this article multi-micron rib waveguide-based power splitters and combiners are investigated, these devices are etched directly on the waveguide's core, significantly simplifying the manufacturing process by only requiring one lithographic mask. In order to maximize power transfer, tapered connections are employed for waveguide width conversion. The performance of multi-micron waveguides is less affected by side-wall roughness than nanometre scale devices, also benefiting from less costly lithographic manufacturing processes, due to its larger feature size. Single-mode strip waveguides for near infrared and visible light have dimensions on the order of hundreds of nanometres, a limitation that does not exist in rib waveguides, which are able to support monomodal operation with much larger dimensions, above the micrometre. The proposed photonic devices' technology is silicon-on-insulator (SOI), featuring a waveguide core of hydrogenated amorphous silicon nitride with multi-micron features, compatible with low resolution ultra-violet lithography and Plasma-Enhanced Chemical Vapor Deposition (PECVD), which allows a significant cost reduction. In this study we employ simulation tools based on the FEM, BPM and FDTD to assess the performance of multi-micron SOI rib waveguide multi-mode interference (MMI) splitters and combiners. The fundamental mode power loss of the proposed devices, for quasi-TE and quasi-TM modes, is less than 1 dB, for a splitter-combiner setup.

Keywords: Rib waveguide, Multi-mode interference, Splitter, Combiner, Photonics.

Acknowledgements: Research supported by FCT - Fundação para a Ciência e Tecnologia, through grant SFRH/BD/07792/2021 and projects PTDC/NAN-OPT/31311/2017, FCT/MCTES: UIDB/00066/2020, and by Instituto Politécnico de Lisboa, through projects IPL/2021/wavesensor_ISEL and IPL/2021/MuMiAS-2D_ISEL.

Molecularly imprinted nanoparticles: plastic antibodies for optical sensing platforms.

Alessandra Maria Bossi^{1,2}

¹Department of Biotechnology, University of Verona, Strada le Grazie 15, 37134 Verona, Italy ²INESC TEC, Campus da FEUP, Rua Dr Roberto Frias, 4200-465 Porto, Portugal

alessandramaria.bossi@univr.it

Abstract. Molecularly imprinted polymers (MIPs) are tailor-made biomimetic materials prepared by means of a template assisted synthesis: the monomers and the crosslinker are polymerized in the presence of the target analyte, called the template, so that stereo-chemical template-complementary prints are left on the growing polymer. MIPs exhibit exceptional recognition properties for the template, possessing selectivity, specificity and affinity on the par of natural antibodies [1-4], but being plastics, MIPs are resistant to thermal stress and to extreme pHs, cheaper in production respect to the biological macromolecules and suitable to mass fabrication.

With the aim to improve the determination of biomarkers in sensing platforms, the rational design and the preparation of MIP nanoparticles (nanoMIPs) suitable for the recognition of proteins and peptides will be discussed.

NanoMIPs addressed at the recognition of targeted proteins or peptides can be synthesized by radical polymerization of monomers. The prepared materials are characterized physico-chemically. Generally size of the nanoMIPs are ~50 nm [5]. The binding of the nanoMIPs for their targets show very high affinity and selectivity, indicating that nanoMIPs can be ideal biomimetics for sensing platforms.

Examples of integration of nanoMIPs to optical sensors will be discussed [6-7].

Keywords: molecularly imprinted nanoparticles; biomimetics; molecular recognition; optical chemical sensor

References:

- [1] C. Alexander C. et al. *J. Mol. Recognit.*, 2003, 19, 106.
- [2] A. Bossi et al. *Biosens. Bioelectronics*, 2007, 22, 1131.
- [3] Y. Hoshino et al. *J. Am. Chem. Soc.*, 2008, 130, 15242.
- [4] A.M. Bossi *Nat. Chem.*, 2020, 12, 111.
- [5] L. Cenci et al. *Talanta*, 2018, 178, 772.
- [6] N. Cennamo et al. *Biosens. Bioelectronics*, 2020, 156, 112126.
- [7] N. Cennamo N et al. *Front. Bioeng. Biotechnol.* 2021, 9, 801489.

Nanoscopy, Metabolic Imaging and Intracellular Sensing based on Nanophotonics and Nonlinear Microscopy approaches

Dr. rer. nat. Jana B. Nieder

International Iberian Nanotechnology Laboratory (INL), Ultrafast Bio- and
Nanophotonics group, Headquarters at Av. Mestre Jose Veiga, 4715-330 Braga,
Portugal

jana.nieder@inl.int

Abstract. We will provide the background of state-of-the-art fluorescence sensing and imaging techniques that deploy nanophotonics approaches to surpass the optical diffraction limit based on near field effects [1, 2, 3], that make use of various fluorescence spectroscopy parameters to measure metabolic states of cells [4] to distinguish several fluorophores at the same time using ultrabroadband lasers [5] and to measure intracellular temperature via luminescence nanothermometers [6,7] and magnetic fields via fluorescent point defects in diamond [8].

It will provide an overview on the recent methodological developments in our research group “Ultrafast Bio- and Nanophotonics” at INL, while providing an overview of the physical background of these laser-based imaging technologies.

Keywords: MIET-FLIM, Intracellular temperature, ultrabroadband lasers, multiphoton microscopy.

Acknowledgements: We acknowledge funding by the FCT via the projects with grant no. 029417 and no. 032619, the CCDR-N via the project no. NORTE-01-0145-FEDER-000019 and PO NORTE; FCT for funding via the project no. NORTE-01-0247-FEDER-045932, and La Caixa Banking Foundation and FCT for funding via the project no.: LCF/PR/HP20/5230000

References:

- [1] E. Figueiras, O. F. Silvestre, T. O. Ihalainen, and J. B. Nieder, “Biochim. Biophys. Acta - Mol. Cell Res. 118530 (2019).
- [2] I. Ghaeli, R. M.R. Adão, and J. B. Nieder, *Adv. Mater. Interfaces*, 7, 22, (2020), p. 2000581
- [3] R. M. R. Adão, R. Campos, E. Figueiras, P. Alpuim, and J. B. Nieder, *2D Mater.* 6(4), 45056 (2019).
- [4] A. R. Faria, O. F. Silvestre, C. Maibohm, R. M. R. Adão, B. F. B. Silva, and J. B. Nieder, “*Nano Res.* 12(5), 991–998 (2018).
- [5] C. Maibohm, F. Silva, E. Figueiras, P. T. Guerreiro, M. Brito, R. Romero, H. Crespo, and J. B. Nieder, “*Biomed. Opt. Express* 10(4), 1891–1904 (2019).
- [6] O. A. Savchuk, O. F. Silvestre, R. M. R. Adão, and J. B. Nieder, *Sci. Rep.* 9(1), 7535 (2019).
- [7] P. L. Silva, O. A. Savchuk, J. Gallo, L. García-Hevia, M. Bañobre-López, and J. B. Nieder, *Nanoscale*, 12, 21647 (2020).
- [8] F. Camarinho, J. Bocquel, J. Gallo, M. Bañobre-López, K. Berg-Sørensen, U. L. Andersen, A. Huck, and J. B. Nieder, “*Part. Part. Syst. Character.* 38(8), (2021).

Dehydropeptide-based plasmonic lipogels as bionanosystems for controlled drug release

Sérgio R. S. Veloso¹, Valéria Gomes¹, Loïc Hilliou², Paula M. T. Ferreira³,
Miguel A. Correa-Duarte⁴, and Elisabete M. S. Castanheira¹

¹ Physics Centre of Minho and Porto Universities (CF-UM-UP) and LaPMET Associate Laboratory, University of Minho, Campus de Gualtar, 4710-057 Braga, Portugal;

² Institute for Polymers and Composites, Department of Polymer Engineering, University of Minho, Campus de Azurém, 4800-058 Guimarães, Portugal.

³ Centre of Chemistry (CQUM), University of Minho, Campus de Gualtar, 4710-057 Braga, Portugal;

⁴ CINBIO, University of Vigo, 36310 Vigo, Spain.

sergioveloso96@gmail.com

Abstract. The encapsulation and control over drug release, mainly of hydrophilic drugs, is currently a major challenge in the application of peptide-based hydrogels for drug delivery, as it might require screening several gelator structures to achieve the adequate release profiles. This can be overcome through encapsulation of the hydrophilic drugs in liposomes, which provides an additional barrier to the drug diffusion, besides enabling the spatiotemporal control and enhanced drug release through a trigger, such as photothermia.

Hence, in this work, silica-coated gold nanoparticles and liposomes (storage units) were combined with dehydropeptide-based hydrogels as a proof-of-concept to afford peptide-based NIR light-responsive lipogels. Several liposomes compositions were assessed to study its influence on the final assembly properties. Gold nanospheres were used to assess the preparation method that enabled a closer proximity of the nanoparticles to the liposomes. The control over a hydrophilic drug model, 5(6)-carboxyfluorescein, was achieved by its encapsulation in liposomes, in which the use of photothermia induced the liposomes phase transition and stimulated the drug release. Further, despite the liposomes and silica-coated nanorods inducing a lower elastic modulus, strongly enhanced the gelation kinetics. Hereby, this work advances strategies for the development of peptide-based hydrogels towards controlled release of hydrophilic drugs through photothermia under NIR light irradiation.

Keywords: peptide hydrogels; self-assembly; liposomes; gold nanorods; photothermia; drug delivery.

Acknowledgements: This work was funded by Ministerio de Economía y Competitividad de España (PID2020-113704RB-I00), Xunta de Galicia (Centro Singular de Investigación de Galicia - Accreditation 2019-2022 ED431G 2019/06 and IN607A 2018/5), and European Union-ERDF (Interreg V-A - Spain-Portugal 0245_IBEROS_1_E, 0712_ACUINANO_1_E, and 0624_2IQBIONEURO_6_E, and Interreg Atlantic Area NANOCULTURE 1.102.531), and by the Portuguese Foundation for Science and Technology (FCT) in the framework of the Strategic Funding of CF-UM-UP (UIDB/04650/2020), IPC (UID/CTM/50025/2020) and CQUM (UIDB/00686/2020). S.R.S. Veloso acknowledges FCT for a PhD grant (SFRH/BD/144017/2019). Support from MAP-Fis Doctoral Programme is also acknowledged.

Nanoscale distance sensing using fluorescently-labelled DNA origami tetrahedra on Graphene

João Azevedo^{1,3*}, Filipe Camarinho¹, Maria João Lopes¹, Ricardo M.R. Adão¹, João Freitas¹, Agnes Purwidyantri¹, Thorsten-Lars Schmidt², Pedro Alpuim^{1,3}, Jana B. Nieder¹

¹ INL - International Iberian Nanotechnology Laboratory

² Physics Department, Kent State University, Kent, Ohio, United States of America

³ Centro de Física das Universidades do Minho e Porto, Universidade do Minho

* joao.azevedo@inl.int

Abstract. We present a hybrid DNA origami-fluorophore-Graphene platform for nearfield sensing and emerging DNA memory applications. DNA origami are folded structures that can be three-dimensional and are usually based on binding short staple strands to a backbone, called a scaffold strand. They can have uses in many fields, e.g., biosensing or electronics.

Here, we add fluorophores at various positions along the tetrahedron architecture at specific distances away from the substrate, while the substrate supporting the tetrahedra is functionalized with Graphene. The functionalization with Graphene allows for Resonance Energy Transfer from the fluorophores to this material, which leads to a characteristic decrease in the lifetime of the fluorescence decay in the vicinity of the surface (quenching) [1]. A mathematical function can describe this effect, which converts fluorescence lifetime to distance to the Graphene layer [2]. DNA tetrahedra are prepared in a mixed solution of strands and then purified. The surface comprises a Graphene monolayer, functionalized by linker molecules and a DNA strand that binds to the origami. Binding sites are prepared at chosen heights in the tetrahedron so that new complementary strands substituted with a fluorophore can be added and set in place by DNA hybridization. These are the so-called *target strands*.

Fluorescence Lifetime Imaging Microscopy (FLIM) is used to characterize the fluorescence lifetimes of chosen sample areas. The distance distribution of the fluorophores relative to the Graphene layer is calculated and displayed using fluorescence lifetime fitting algorithms [3] and the fluorescence lifetime-to-distance conversion model [2]. We determined the fluorophore-to-Graphene distances based on this procedure, agreeing with the expected-by-construction distances. We demonstrate that the quenching effect can be manipulated by changing the Fermi level of Graphene through electrical gating. Both fluorescence intensity and lifetime changes in measurements performed under an applied gate voltage indicate that the tetrahedral origami structures are strained by the electric field, thereby changing the fluorophores' distances to the Graphene layer. We have determined that the tetrahedron can work either as a fluorescence switch or a high-resolution distance-sensitive sensor, depending on the applied voltage range, and we expect exciting developments in sensors based on this system.

Acknowledgements: The authors acknowledge fruitful discussions with Rui Campos and Edite Figueiras on DNA probing, and funding by FEDER, Portugal 2020 and FCT: On4SupremeSens (PTDC/NAN-OPT/29417/2017).

References: [1] R. M. R. Adão, R. Campos, E. Figueiras, P. Alpuim, and J. B. Nieder, "Graphene setting the stage: tracking DNA hybridization with nanoscale resolution", *2D Mater.* 6(4), 45056 (2019). [2] L. Gaudreau et al., "Universal Distance-Scaling of Nonradiative Energy Transfer to Graphene", *American Chemical Society, Nano Letters*, 13(5), pp. 2030-2035 (2013). [3] J. Enderlein and R. Erdmann. "Fast fitting of multi-exponential decay curves", *Optics Communications* 134, pp. 371-378 (1997)

Development of pH-sensitive magnetoliposomes containing shape anisotropic magnetic nanoparticles for applications in dual cancer therapy

Ana Rita F. Pacheco, Elisabete M. S. Castanheira and Ana Rita O. Rodrigues

Physics Centre of Minho and Porto Universities (CF-UM-UP) and LaPMET Associate Laboratory, University of Minho, Campus of Gualtar, 4710-057 Braga, Portugal

pg42480@uminho.pt, ecoutinho@fisica.uminho.pt, ritarodrigues@fisica.uminho.pt

Abstract. Magnetoliposomes are highly promising nanocarriers for application in dual cancer therapy. The combination of liposomes and magnetic nanoparticles in a single multifunctional nanosystem enables guiding the nanoparticles to the tumor site, ensuring a local temperature increase (hyperthermia) and triggering drug release (chemotherapy) while reducing cytotoxic effects. The development of nanoparticles with anisotropic shape (for its improved magnetic properties) and pH-sensitive liposomes with a triggered release of antineoplastic agents results in a safe therapeutic approach, alternative to the conventional therapy [1].

In this work, anisotropic magnetic nanoparticles of mixed calcium/magnesium ferrite were synthesized and characterized. These nanoparticles were encapsulated in pH-sensitive liposomes loaded with doxorubicin, and the resulting nanosystems were characterized by DLS. Fluorescence emission assays were performed to study the release profile of doxorubicin at different pH values and promising results were obtained for application in combined cancer therapy.

Keywords: Anisotropic shape nanoparticles, superparamagnetism, magnetoliposomes, pH sensitivity, dual cancer therapy.

Acknowledgements: FCT under Strategic funding of CF-UM-UP (UIDB/04650/2020).

References:

- [1] Cardoso BD, Rodrigues ARO, Bañobre-López M, Almeida BG, Amorim CO, Amaral VS, Coutinho PJG, Castanheira EMS. Magnetoliposomes based on shape anisotropic calcium/magnesium ferrite nanoparticles as nanocarriers for doxorubicin. *Pharmaceutics*, 2021: 13(8), 1248.

Optical harmonic Vernier effect: properties and applications

André D. Gomes^{1,*}, Marta S. Ferreira², Jörg Bierlich¹, Jens Kobelke¹,
Manfred Rothhardt¹, Hartmut Bartelt¹, and Orlando Frazão³

¹ Leibniz Institute of Photonic Technology (Leibniz-IPHT), Albert-Einstein-Strasse 9,
07745 Jena, Germany

² i3N and Department of Physics, University of Aveiro, Campus Universitário de
Santiago, 3810-193 Aveiro, Portugal

³ INESC TEC and Department of Physics and Astronomy, Faculty of Sciences,
University of Porto, Rua do Campo Alegre 687, 4169-007 Porto, Portugal

* andre.gomes@leibniz-ipht.de

Abstract. In the past decade a new tool with the potential to magnify the sensitivity and resolution of fiber interferometric sensors has emerged. Inspired by the Vernier caliper, invented in 1631, this technique relays the Vernier effect concept into the optical domain, particularly using optical fiber interferometers^[1]. The same way a caliper uses the overlap of two different scales to achieve higher resolution, here two interferometers with slightly detuned interferometric signals are used. The result is an envelope modulation that presents magnified sensing capabilities (i.e., magnified wavelength shift) compared to the signal of the main sensing interferometer employed in the system^[2]. In this context, the magnification factor (M) is an important metric, which indicates how many times the sensitivity is improved compared to that of the individual sensing interferometer used. Recently, we have demonstrated an extended concept of the optical Vernier effect, where harmonics can be introduced to further increase the sensitivity by multiple integers of the magnification factor, while keeping the size of the Vernier envelope modulation constant^[3]. This presentation will discuss the properties of the optical harmonic Vernier effect, with special focus on important aspects related with its potential and limitations. Subsequently, both simple and more complex configurations for applications in strain, temperature, and refractive index sensing will be presented^[4,5].

Keywords: Optical fiber sensors, Vernier effect, harmonic Vernier effect, fiber interferometers.

Acknowledgements: FCT (SFRH/BD/129428/2017)

References:

- [1] A. D. Gomes, H. Bartelt, and O. Frazão, *Laser Photon. Rev.* **15**, 2000588 (2021).
- [2] A. D. Gomes, M. Becker, J. Dellith, M. I. Zibaii, H. Latifi, M. Rothhardt, H. Bartelt, and O. Frazão, *Sensors (Switzerland)* **19**, (2019).
- [3] A. D. Gomes, M. S. Ferreira, J. Bierlich, J. Kobelke, M. Rothhardt, H. Bartelt, and O. Frazão, *Sensors* **19**, 5431 (2019).
- [4] A. D. Gomes, M. S. Ferreira, J. Bierlich, J. Kobelke, M. Rothhardt, H. Bartelt, and O. Frazão, *Opt. Laser Technol.* **127**, 106198 (2020).
- [5] A. D. Gomes, J. Kobelke, J. Bierlich, J. Dellith, M. Rothhardt, H. Bartelt, and O. Frazão, *Sci. Rep.* **10**, 19313 (2020).

Optofluidic fibre sensor for the real-time measurement of refractive index

João M. Leça^{1,2*}, Yannis Magalhães¹, Tiago Paixão¹, Paulo Antunes¹,
Vanda Pereira², and Marta S. Ferreira¹

¹ i3N and Physics Department, University of Aveiro, Campus de Santiago, 3810-193 Aveiro, Portugal

² ISOPlexis–Sustainable Agriculture and Food Technology Center, University of Madeira, Campus da Penteadá, 9020-105 Funchal, Portugal

* jmleca@ua.pt

Abstract. In this work, a microfluidic system combined with a fibre-optic extrinsic Fabry–Perot interferometer (EFPI) is proposed to measure refractive index continuously and in real time. A microfluidic platform was designed and created for this purpose through 3D printing. The EFPI cavity is an integral part of the chip and is perpendicular to the sample flow. The light is conducted through a single mode optical fibre and the refractive index measurements were based on the wavelength shift of the reflected spectra. The developed optofluidic set-up was tested using different concentrations of glucose in aqueous solutions. Different EFPI cavity lengths were evaluated and the sensor with a ~1640 nm length was found to have a sensitivity to the refractive index of 1143 nm/RIU when using the higher frequency signal. Combining the intrinsic advantages of microfluidic systems and optical fibre sensors, the proposed sensing device has a great potential for applications where refractive index real-time measurement is required, such as food and beverages process control (e.g., wine fermentation), quality and safety (e.g., in water and pharmaceuticals), among others.

Keywords: Optofluidics, Fabry–Perot, Refractive Index, Real-time Measurement

Acknowledgements: This work was financially supported by the project AROMA, funded by FEDER, through CENTRO2020-Programa Operacional Regional do Centro, CENTRO-01-0145-FEDER-031568, and by national funds (OE), PTDC/EEI-EEE/31568/2017, UIDB/50025/2020 & UIDP/50025/2020, through FCT/MCTES. The work of J. M. Leça and M. S. Ferreira was supported by the research fellowship BIPD-25 (16125/2021) and CEEC-IND/00777/2018, respectively.

Simultaneous measurement of displacement and temperature using balloon-like hybrid fiber sensor

João P. Santos,^{1*} Jörg Bierlich,² Jens Kobelke,² and Marta S. Ferreira¹

¹ i3N and Physics Department, University of Aveiro, Campus de Santiago, 3810-193 Aveiro, Portugal

² Leibniz Institute of Photonic Technology, Albert-Einstein-Straße 9, 07745 Jena, Germany

* jpsantos@ua.pt

Abstract. A hybrid sensor based on a silica capillary in a balloon-like shape for simultaneous measurement of displacement and temperature is proposed for the first time, to the best of our knowledge. The sensor is fabricated by splicing a segment of a hollow core fiber between two single mode fibers (SMF) and by creating a balloon shape with the capillary at the top-center position. The SMF-capillary-SMF configuration excites an antiresonant (AR) guidance and the balloon shape enhances a Mach-Zehnder interferometer (MZI). The different responses of the interferometers to external displacement and temperature variations lead to a hybrid application of the sensor for simultaneous measurement of these parameters. Experimental results show that, for a capillary length of 1.2 cm and a balloon length of 4 cm, AR is insensitive to displacement and its sensitivity to temperature is $14.3 \text{ pm}/^\circ\text{C}$, while the MZI has a sensitivity to displacement of $1.68 \text{ nm}/\text{mm}$ and twice the sensitivity of AR to temperature, of $28.6 \text{ pm}/^\circ\text{C}$. The proposed fiber sensor consists of only one sensing element in one configuration exciting two interferometers at the same time, which makes it of simple fabrication as well as low cost.

Keywords: Antiresonant, Mach-Zehnder, Balloon-like, Displacement, Temperature

Acknowledgements: This work was financially supported by the project AROMA, funded by FEDER, through CENTRO2020-Programa Operacional Regional do Centro, CENTRO-01-0145-FEDER-031568, and by national funds (OE), PTDC/EEI-EEE/31568/2017, UIDB/50025/2020 & UIDP/50025/2020, through FCT/MCTES. The work of M. S. Ferreira was supported by the research fellowship CEEC-IND/00777/2018. The work was also funded by the German Federal Ministry of Education and Research (BMBF): “The Innovative Growth Core TOF” (Tailored Optical Fibers, FKZ 03WKCV03E) as well as the bilateral cooperation FCT/DAAD (FLOW, Project ID: 57518590).

Characterization of a D-shaped photonic crystal fiber with two silver-Al₂O₃ nanowire metamaterial layers

Romeiro, Amanda de Freitas¹; Cardoso, Markos Paulo¹; Silva, Anderson Oliveira²; Costa, João Crisostomo Weyl Albuquerque¹; Giraldo, M. Thereza R.³; Santos, Jose L.^{4,5}; Baptista, Jose M.^{4,6}; Guerreiro, Ariel^{4,5}

Laboratory of Applied Electromagnetism - Federal University of Pará - Belém, Brazil¹

Department of Electronic Engineering – Federal Center for Technological Education
Celso Suckow da Fonseca – Rio de Janeiro, Brazil²

Military Institute of Engineering, Rio de Janeiro, Brazil³

INESC TEC, Porto, Portugal⁴

Faculty of Sciences, University of Porto, Porto, Portugal⁵

Faculty of Exact Sciences and Engineering, University of Madeira, Funchal, Portugal⁶

Amanda de Freitas Romeiro - romeiro.amanda@gmail.

Abstract. The metamaterial bulk properties are used in the control and to manipulate surface plasmon to produce a multiplasmonic D-shaped Photonic Crystal Fiber device. Two plasmon resonances can be tuned by the customization of two silver-silica nanowire metamaterial layers deposited adjacent to each other in the flat surface of the fiber. Using computational simulations based on finite element method (FEM), we show how to apply the sensor to address refractive index of surrounding media and the nanowire layer's constituent characteristics at different wavelengths. Such characteristics find large potential to provide several applications for plasmonic optical sensors

Keywords: surface plasmon resonance; photonic crystal D-shaped fiber; refractive index sensor; metamaterial; tunable sensor.

Acknowledgements: This study was financed in part by the Coordenação de Aperfeiçoamento de Pessoal de Nível Superior – Brazil (CAPES) – Finance code 001. During the period of elaboration of this work, the authors have, also obtained support from the Conselho Nacional de Desenvolvimento Científico e Tecnológico (CNPq), Brazil. It was also financed by the ERDF—European Regional Development Fund through the Operational Program for Competitiveness and Internationalization—COMPETE 2020 Program and by National Funds through the Portuguese funding agency, FCT—Fundação para a Ciência e a Tecnologia within project “GreenNanoSensing” POCI-01-0145-FEDER-032257.

Optical fiber sensor based on balloon-like interferometer structure and 3D printer for displacement sensing

Victor Cardoso^{1,4,*}, Paulo Caldas^{4,5}, M. Thereza R. Giraldo², Orlando Frazão^{3,4},
João Costa¹ and José L. Santos^{3,4}

¹ Federal University of Pará, Applied Electromagnetism Laboratory, Rua Augusto Corrêa, 01, 66075-110, Belém, Pará, Brazil

² Military Institute of Engineering, Laboratory of Photonics, Praça Gen. Tibúrcio, 80,22290-270, Rio de Janeiro, Brazil

³ Department of Physics and Astronomy, Faculty of Sciences of University of Porto, Rua do Campo Alegre, 687, 4169-007 Porto, Portugal

⁴ Institute for Systems and Computer Engineering, Technology and Science, Rua do Campo Alegre, 687, 4169-007 Porto, Portugal

⁵ Polytechnic Institute of Viana do Castelo, Rua Escola Industrial e Comercial de Nun'Álvares, 4900-347, Viana do Castelo, Portugal

* victorcard@ufpa.br

Abstract. An optical fiber sensor based on a balloon-like interferometer structure (BLIS) combined with a 3D printer piece has been presented and demonstrated, which can be used to measure displacement. This work presents preliminary results using this combination. BLIS has a compact size, easy fabrication, low cost, and it is repeatable. The sensor is based on the interference between the core and cladding modes, this is due to the curvature of the fiber, because a part of the light will be free from the core restriction and couple to the cladding when the light propagates in the curved balloon shaped section. The piece was developed so that there is an axial displacement in the balloon. The sensing head is embedded between two rods so that the dimension associated with the macro bend is changed when there is a displacement. From this, it is possible to analyse the variation of the transmitted optical power as a function of the displacement. Experimental results show that the BLIS offers a displacement sensitivity of 0.0003 dB/um and a dynamic range of 3000 um. Due to its and advantages presented above, this sensor is a good candidate for applications where displacement need to be analysed.

Keywords: Balloon-like interferometer, displacement sensor, bent single-mode fiber, displacement sensing, diameter variation

Acknowledgements: This study was financed in part by the Brazilian Funding Agencies Conselho Nacional de Desenvolvimento Científico e Tecnológico (CNPq) and Coordenação de Aperfeiçoamento de Pessoal de Nível Superior (CAPES). It was supported by the Federal University of Pará (UFPA) and the Military Institute of Engineering (IME) from Brazil and the Institute for Systems and Computer Engineering, Technology and Science (INESC TEC) and the Department of Physics and Astronomy, Faculty of Sciences of University of Porto from Portugal.

Evaluation of the orientation impact in thermal behavior of cylindrical Li-ion batteries in different cycling conditions using FBG sensors

Lucca Matuck^a, João L. Pinto^a, Carlos Marques^a, Micael Nascimento^a

^a I3N and Department of Physics, University of Aveiro, Campus de Santiago, 3810-193 Aveiro, Portugal

luccamatuck@ua.pt

Abstract. Optical fibre Bragg grating (FBG) sensors are nowadays widely used in several applications regarding the Li-ion battery (LiB) management [1]. In this work, FBG sensors were used to evaluate the thermal performance of an 18650 LiB operating under normal and abusive conditions while positioned in the horizontal and vertical orientations. In total, three FBG sensors were used to track in real time the temperature variation of cathode, middle and anode of the LiB. Tests for each orientation were performed, each of them consisted of two cycles: the first one with normal charge/discharge conditions (operating between 2.75 V and 4.2 V), and another in abusive conditions (2.0 V and 4.95 V). The battery was submitted to constant current charge and discharge steps, with rest intervals between each operation. The results suggest that, in general, the temperature variation while operation in vertical orientation is lower if compared to the horizontal one, mainly in the anode, while the LiB is submitted to the abusive charge procedure ($\Delta T = 2.7 \pm 0.2$ °C); in addition, the FBG sensors were able to track in real time the temperature variation of three different locations of the battery simultaneously. The temperature variation registered for each sensor is shown and discussed.

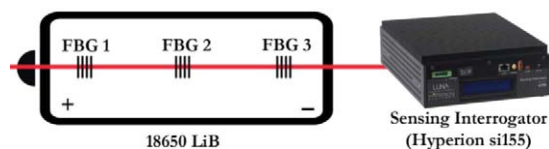


Figure 1- Experimental setup.

Keywords: Lithium-ion battery performance, fibre Bragg grating sensors, real time thermal monitoring, battery abusive operating, battery management.

Acknowledgements: The authors gratefully acknowledge the European Project “Innovative physical/virtual sensor platform for battery cell” (INSTABAT) (European Union’s Horizon 2020 research and innovation programme under grant agreement No 955930), grant number BI/UI96/9971/2022, <https://www.instatat.eu/>. The authors also acknowledge the financial support within the scope of the project i3n, UIDB/50025/2020 & UIDP/50025/2020, financed by national funds through the FCT/MEC.

References:

[1] Nascimento M, Paixão T, Ferreira MS, Pinto JL. Thermal Mapping of a Lithium Polymer Batteries Pack with FBGs Network. *Batteries*. 2018; 4(4):67. <https://doi.org/10.3390/batteries4040067>.

Magneto-piezoresistance in magnetorheological elastomer for low range conductive feedback

Muhammad Kashfi Shabdin¹, Mohd Mustafa Awang Kechik¹, Chen Soo Kien¹,
Lim Kean Pah¹, Abdul Halim Shaari¹, Nurhazimah Nazmi²

¹Superconductor and Thin Film Laboratory, Physics Department, Faculty of Science,
Universiti Putra Malaysia (UPM), 43400 UPM Serdang, Selangor Darul Ehsan,
Malaysia

²Advanced Vehicle System Research Group, Malaysia - Japan International Institute of
Technology, Universiti Teknologi Malaysia, Jalan Sultan Yahya Petra, Kuala Lumpur
54100, Malaysia

kashfi.shabdin@upm.edu.my

Abstract. This study investigates the influence of Graphite (Gr) based magnetorheological elastomer (MRE) on magneto-piezoresistance effect which could be applied in optical soft electronics such as wearable and flexible sensors. Gr is used as a filler in the construction of isotropic and anisotropic MRE samples. The morphological, rheological, and piezoresistive properties of Gr-MRE are explored and compared to those of standard pure MREs. Field emission scanning electron microscopy (FESEM), scanning electron microscopy (SEM), and energy dispersive X-ray spectroscopy (EDX) are used to analyze the morphology of Gr-MRE, while rheological properties are assessed using a rheometer. The piezoresistance qualities are next studied using the designated test-rig. Based on the piezoresistance evaluation, a curve was generated and drawn that describes the relationship between resistance (R) under different applied pressures (F) and magnetic fields (B). Furthermore, the FESEM pictures revealed the presence of Gr fractions, which contribute to the conductivity feature of MRE. It is also noticed that the addition of Gr improved the rheological and conductivity parameters such as storage modulus and resistance response as the magnetic field was increased. The results also shown that the addition of Gr in MRE can aid with the usage of force detection in sensing devices.

Keywords: Magnetorheological Elastomer, Conductive polymer, Graphite.

Acknowledgements: This work was supported by Ministry of Higher Education Malaysia (MOHE) under FRGS grant FRGS/1/2017/STG02/UPM/02/4 and KA107 ERASMUS+ Programme – International Credit Mobility – UmoveME.

Investigation on the operation modes of optoelectronic oscillators based on resonant tunnelling diodes

Tiago Ferro¹, Qusay Raghieb Ali Al-Taai², David Alves¹, A. Al-Khalidi²,
Edward Wasige², and José Figueiredo¹

¹ Centra-Ciências, Department of Physics, Faculty of Sciences, University of Lisbon, Portugal.

² High Frequency Electronics Group, James Watt School of Engineering, University of Glasgow, UK.

tiago7498@gmail.com

Abstract. In this work we report the preliminary work on simple and compact optoelectronic oscillators (OEOs) that takes advantage of the optoelectronic properties of double barrier quantum well (DBQW) resonant tunneling diodes (RTDs) based photodetectors (RTD-PDs). OEOs are optoelectronic circuits capable of producing low phase noise electronic sine waves and modulated optical continuous wave signals. Generically, they comprise a laser diode (LD), an optical modulator, electric filters, electrical and optical amplifiers, a photodetector (PD), and a low loss delay-line such as an optical fiber, arranged in a way to convert light energy into stable, spectrally narrow RF/microwave reference signals [1]. OEOs applications range from radar technology, satellite communication links, precise metrological time and frequency measurements, reference clock distribution, and high-bit rate, optically supported, communication wireless links, including radio over fiber.

DBQW-RTDs are nanoelectronic semiconductor devices with N-shape like current-voltage characteristic capable of producing electronic oscillations (up to THz), due to its ultrawideband negative differential conductance and nanometric dimensions [2]. When incorporating moderately thick light sensitive layers an RTD can operate as an amplified photodetector, known as RTD-PD. Taking advantage of RTD-PD properties (such as electrical gain and light detection) simple and compact low-cost OEOs can be implemented, where the RTD-PD replaces the need of an optical modulator, and electrical and optical amplifiers. The RTD-PD self-oscillation signal drives the LD, with a fraction of the LD optical output being feed back into the RTD-PD through an optical fiber. Here we report the optoelectronic characterization of RTD-PD devices aiming their function as amplified photodetectors, including its operation as optical controlled voltage-controlled oscillators (OC-VCO) being used to implement RTD-PD based OEOs, and present the investigation on the modes of operation of these RTD based OEOs, including injection locking to an external source and self-injection locking.

Keywords: Resonant tunnelling diode, optoelectronic oscillator, laser diode, injection locking

Acknowledgements: EC Grant No. 828841 659 ChipAI-H2020-FETOPEN-2018–2020, JWNC nanofabrication centre (UGLA).

References:

- [1] Yao, X. and Maleki, L., 1996. Optoelectronic oscillator for photonic systems. *IEEE Journal of Quantum Electronics*, 32(7), pp.1141-1149.
- [2] Maekawa, T., Kanaya, H., Suzuki, S. and Asada, M., 2016. Oscillation up to 1.92 THz in resonant tunneling diode by reduced conduction loss. *Applied Physics Express*, 9(2), p.024101.

Optimizations of Si PIN Diode Phase-Shifter Combined with RC Equalizer Under Forward Biasing

Dror Malka

Faculty of Engineering, Holon Institute of Technology (HIT), Holon 5810201, Israel

drom@hit.ac.il

Abstract. Silicon (Si) forward-biased PIN-Phase shifter (PS) has an un-doped intrinsic area at the centre of a Si waveguide core. This area is sandwiched between p and n doped, half-etched Si conducting areas. Because of this simple component formation, the PIN-PS can be easily integrated with other optical components [1]. Applying a forward bias to the Si PIN diode causes a large number of free-carriers to be gathered in the intrinsic territory and induce an optical phase shift via the carrier plasma effect [1]. Since both PIN and conventional PN phase shifters use the carrier plasma effect to form an optical phase shift, the quantity of electric charge necessary for the same optical modulation does not have much difference between these two kinds of phase shifter. However, Si PS performances can be reduced dramatically due to laser thermal drift, fabrication errors on the width and etching rib waveguide, the concentration of electrons and holes doping, and the doping location. To solve these issues, in this work we demonstrated an optimal design of Si PIN-PS based on carrier injection using a commercial 220 nm top silicon-on-insulator (SOI) rib waveguide. The optimizations were done on the doping concentration, doping location, key geometrical parameters of the rib Si waveguide structure, driver voltage, and the operating wavelength using optical and electrical simulations. These optimizations can be very useful to study how to select the optimal PS design that is suitable for the requirements of the telecommunication system. Commercial high-speed silicon Mach-Zehnder modulator required to be active around the quadrature bias point with low power consumption, small footprint, and small drive voltage. The bias controlling is done by an optical phase-shifter. However, the accuracy is limited by the drive voltage, laser thermal drift, and fabrication errors. To overcome these problems, we propose in this paper the study and analysis of Si PIN diode phase-shifter combined with the RC equalizer under forward biasing at 1550 nm wavelength using the standard 220 nm substrate silicon-on-insulator rib waveguide technology. Numerical investigations were carried out on the key geometrical parameters, doping concentration, doping locations, operating wavelength, biasing level. Results show that the optimal design can be operated with a lower voltage ($V_{\pi}=1.629$ v), lower attenuation ($\alpha=28.985$ dB/cm), 34.11 GHz bandwidth, and short device length with an extremely small voltage-length product $V_{\pi}L=0.815$ vmm. Thus, this PS can be used for designing an efficiency high-speed MZM and to obtain better performances in the optical commutation system.

Keywords: MZM, Silicon, Phase-shifter

References:

- [1] S. Akiyama, T. Baba, M. Imai, T. Akagawa, M. Takahashi, N. Hirayama, H. Takahashi, Y. Noguchi, H. Okayama, and T. Horikawa, "12.5-Gb/s operation with 0.29-V · cm $V_{\pi}L_{\pi}$ using silicon Mach-Zehnder modulator based-on forward-biased pin diode," Opt. Express 20, 2911-2923 (2012).

Impact of Sm on microstructure and Faraday magneto-optical effects of transparent Y_2O_3 ceramics

Andrzej Kruk

Pedagogical University of Cracow, Institute of Technology, ul. Podchorążych 2, 30-084 Kraków, Poland

Andrzej.kruk@up.krakow.pl

Abstract. Currently, crystals show large magneto-optical effects, however the diameter of monocrystalline materials are too small to use to the high-power optical isolator. Polycrystalline magneto-optical Y_2O_3 ceramics doped with selected rare earth elements were fabricated by arc plasma melting using rare-earth oxides as the precursors. No milling and /or sintering aids were adopted in this ceramic fabrication processing. X-ray diffraction analysis revealed only one phase. Rietveld Refinement shows the crystallite size of samples. The addition of Sm^{3+} leads to an increase lattice constants. The impacts of Sm^{3+} doping on morphology and Faraday magneto-optical effects were systematically investigated. The wavelength dispersion of the Verdet constants of transparent materials has been investigated at sensitive and wide spectrum range measurement setup [1]. The 1 at.% Sm doped specimen exhibits the high in-line transmittance of $\sim 70\%$ at 532 nm and the Verdet constant of 58 ± 0.1 rad/T m at 532 nm and 7 ± 0.1 rad/Tm at 1064 nm. Transparency of as-synthesized ceramics was higher than Ce or Pr doped Y_2O_3 [2]. The Verdet constants of magneto-optical RE: Y_2O_3 ceramics generally linearly increase with an increase of Sm^{3+} concentration. Magneto-optical figure of merit for media was calculated.

Keywords: Y_2O_3 , magneto-optical properties, arc plasma melting, optical isolator, microstructure

Acknowledgements: This research was funded by National Science Center, Poland: Sonata 2016/23/D/ST8/00014 and the National Centre for Research and Development, Poland: TANGO-V-A/0016/2021-00.

References:

- [1] A. Kruk, M. Mrózek, The measurement of Faraday effect of translucent material in the entire visible spectrum, *Measurement*, 162, 2020, 107912 doi.org/10.1016/j.measurement.2020.107912
- [2] A. Kruk, Optical and structural properties of arc melted Ce or Pr -doped Y_2O_3 transparent ceramics, *Ceramics International*, 43, 2017, Pages 16909-16914, doi.org/10.1016/j.ceramint.2017.09.092

Optical Fiber Sensors for Monitoring Cement Paste Carbonation

Pedro M. da Silva^{1,2*}, João P. Mendes^{1,3}, Luís C. C. Coelho^{1,2}
e José M. M. M. de Almeida^{1,4}

¹ INESC TEC-Institute for Systems and Computer Engineering, Technology and Science, and Faculty of Sciences, University of Porto, Rua do Campo Alegre, 4169-007 Porto, Portugal

² Department of Physics and Astronomy, Faculty of Sciences, University of Porto, Rua do Campo Alegre, 4169-007 Porto, Portugal

³ CIQUP – Chemistry Research Unit, Chemistry and Biochemistry Department, Faculty of Sciences, University of Porto, 4169-007 Porto, Portugal.

⁴ Department of Physics, School of Sciences and Technology, University of Trás-os-Montes e Alto Douro, 5001-801 Vila Real, Portugal

* pedro.m.madeira@inesctec.pt

Abstract. The use of concrete has been widespread in our society in housing and infrastructure [1], despite the environmental cost associated with its production [2]. Its decay poses a social, an economic and an environmental problem. Currently, the carbonation of cement paste [3] is monitored through the measurement of its pH [4]. Several optical fiber sensors (OFS) have already been produced for the continuous monitoring of cement pastes pH [5], but have not been tested in a representative environment. In the current work we focus on monitoring the carbonation of cement paste, through an OFS. Single fibre reflectance spectroscopy, previously employed to measure cement paste durability [6], is used in the current work to monitor the discoloration of cement paste caused by carbonation. As the carbonation front reaches the fiber tip embedded in the cement paste, the signal reflected onto the fiber increases. The accelerated carbonation of three limestone cement paste samples in an atmosphere of 100%CO₂ was successfully monitored. The applicability of the sensor for operational use with ambient CO₂, 0.04%CO₂, was confirmed through a measurement of carbonation at 3% CO₂ [7]. The cross interference from water ingress and egress was also evaluated, and it didn't hinder the measurements of carbonation. Therefore, a novel OFS capable of measuring cement paste carbonation and durability, is achieved.

Keywords: Cement paste, Carbonation, Low-cost Optical Fiber Sensor, Durability.

Acknowledgements: This work is financed by National Funds through the Portuguese funding agency, FCT - Fundação para a Ciência e a Tecnologia, within project UIDB/50014/2020, the PhD grant UI/BD/152695/2022, the PhD grant SFRH/BD/130674/2017 and the research contract CEECIND/00471/2017.

References:

- [1] C. R. Gagg, *Engineering Failure Analysis*. **40**, 114–140 (2014).
- [2] T. Kim, C. Chae, G. Kim, H. Jang, *Sustainability*. **8**, 348 (2016).
- [3] C.-F. Chang, J.-W. Chen, *Cement and Concrete Research*. **36**, 1760–1767 (2006).
- [4] A. Behnood, K. van Tittelboom, N. de Belie, *Construction and Building Materials*. **105**, 176–188 (2016).
- [5] A. Tariq *et al.*, *Sensors and Actuators B: Chemical*. **327**, 128906 (2021).
- [6] P. M. da Silva, L. C. C. Coelho, J. M. M. M. de Almeida, *Chemosensors*. **9**, 312 (2021).
- [7] M. Castellote, L. Fernández, C. Andrade, C. Alonso, *Materials and Structures*. **42**, 515–525 (2009).

Reducing the sunlight impacts in urban areas using asphalt mixtures with phase change materials: a review in Scopus in the last 3 years

Salmon Landi Jr.^{1,*}, Iran Rocha Segundo^{2,3,**}, Natália Homem⁴, Jorge Sousa³,
Manuel F. M. Costa⁵, Elisabete Freitas² and Joaquim Carneiro^{2,***}

¹ Federal Institute Goiano, Rio Verde – GO, Brazil;

² Centre of Physics of Minho and Porto Universities (CF-UM-UP), University of Minho, Azurém Campus, Guimarães, Portugal;

³ ISISE, Department of Civil Engineering, University of Minho, Guimarães, Portugal;

⁴ Digital Transformation CoLab (DTx), Building 1, Campus of Azurém, University of Minho, Guimarães, Portugal;

⁵ Centre of Physics of Minho and Porto Universities (CF-UM-UP), Gualtar Campus, University of Minho, Braga, Portugal

* salmon.landi@ifgoiano.edu.br; ** iran_segundo@hotmail.com;

*** carneiro@fisica.uminho.pt

Abstract. Phase change materials (PCMs) have been incorporated into asphalt concrete pavements because during physical state changes they can regulate the temperature absorbing and releasing heat. This effect reduces temperature gradients of pavements and, consequently, increases its service life. In this work, a systematic review of recent articles published in peer-review journals (available in the Scopus database) involving asphalt mixtures with PCMs and focusing on mechanical characterization is presented. The generated literature list (56 papers) was checked manually (reading materials and methods and results) in order to exclude works in which wheel tracking and/or dynamic creep tests were not used. It is observed that most of the selected papers investigated the benefits of polyethylene glycol as a PCM. The most common strategy to avoid leakage during the phase transition involved the use of a porous material that acts as a carrier matrix for the PCMs. Besides that, it was possible to note that, in general, asphalt pavements with PCMs are systems with favourable thermal transferability and, therefore, demonstrated higher heat absorption and dissipation rates. Finally, in general, the asphalt mixtures containing PCMs showed lower mechanical performance compared with control mixtures, however, they still satisfy the required criteria. In any case, it is expected that with the incorporation of PCMs into asphalt pavements, the social and environmental effects (Urban Heat Island) of sunlight in urban areas can be mitigated by the thermoregulation phenomena.

Keywords: Phase change material; Asphalt mixture; Thermal properties; Permanent deformation



Portuguese Society for
Optics and Photonics
www.optica.pt

